



For Earth, For Life
Kubota

RA

RA WHEEL RAKE

RA108CR

RA210CR

RA212CR



KUBOTA CANADA LTD.

Head Office:

1155 Kubota Drive, Pickering, Ontario L1X 0H4

Tel 1-800-405-6916

Visit our web site at: www.kubota.ca



This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty and safety information. See dealer for details.
77700-10534EN - Rev. 5/2020 | © 2020 Kubota Canada Ltd.

Printed 01/2020

RA WHEEL RAKE

**RA108CR RA210CR
RA212CR**



NEW Wheel Rakes RA108CR | RA210CR | RA212CR

The Kubota RA Series wheel rakes are fast and productive for handling dry hay.

Transport is safe and easy on the road or through narrow gates and openings. Ranging in transport widths from 9'2" to 9'6"

Wing frame is adjustable for a wider range of windrow widths on our 200 Series

Adjustable for 12 different tractor drawbar heights to ensure proper working angles of the rake wheels

Independent Wing Cylinder Lockouts allow for single sided, left or right only raking in addition to providing safety and security when both sides are engaged in transport mode

Individual Rake Wheel Suspension is ideal for rough and uneven hay fields allowing each wheel to act independently and follow ground contour

NEW Wheel Rakes

MODEL	RA108CR	RA108CR 2 Wheel Extension	RA210CR	RA212CR
Transport Length A	645 cm (21'2")		757 cm (24'10")	
Working Length (Max.) B	655 cm (21'6")		772 cm (25'4")	
Transport Width C	284 cm (9'4")	290 cm (9'6")	279 cm (9'2")	282 cm (9'3")
Transport Height, Min. D	244 cm (8')		254 cm (8'4")	
Transport Height, Max. E	257 cm (8'5")	267 cm (8'9")	292 cm (9'7")	302 cm (9'11")
Min. Working Width F	478 cm (15'8")	589 cm (18'4")	549 cm (18')	640 cm (21')
Max. Working Width G	508 cm (16'8")	620 cm (20'4")	640 cm (21')	762 cm (25')
Min. Windrow	86 cm (34 in)		91 cm (36 in)	
Max. Windrow	183 cm (72 in)		226 cm (89 in)	
Working Height	140 cm (55 in)			
Typical Weight w/o Options	662 kg (1460 lb)	734 kg (1640 lb)	812 kg (1790 lb)	893 kg (1970 lb)
Wing Spread	N/A		One hole changes windrow and working width 15 to 18 cm (6 to 7 in)	
Hydraulic Circuits	Closed-center or Open-center, one remote			
Hydraulic Power Required	12410 kPa, 38 L/min (1800 psi, 19 gpm)			
Minimum Tractor hp	30 hp	40 hp	40 hp	50 hp



Adjustable wing down pressure allows additional control in the position of the wheels



Adjustable Windrow and Raking width with raking widths between 15'9" – 25'




Height adjustment holes allows the hitch to be adjusted from a height of 13.5" to 23.75"



Optional Single and Dual Wheel Kickers



Individual floating rake wheels allows the wheels to closely follow the terrain

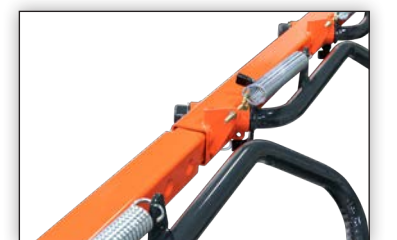

Two wing extension kits for RA108CR and RA210CR add two additional rake wheels