B TRACTOR
PERFORMANCE MATCHED ATTACHMENTS



B TRACTOR
PERFORMANCE MATCHED ATTACHMENTS

Land Pride's relationship with Kubota allows our products to be performance matched to your tractor by Kubota and Land Pride Engineering. This process assures you that the horsepower rating, weight, and width of your implement matches the specifications of your B tractor.

All attachment sizes may not be applicable to all B Tractors. Listed sizes are Performance Matched to select B Tractors. Other sizes in the series may be available for other series of Kubota tractors. Options pictured on Kubota tractors may not be available in your location. Visit landpride.com for specific HP requirements.

This catalog highlights the broad assortment of products engineered to meet the needs of B Series owners. From Grapples to Rakes, Cutters to Tillers, you'll get more work done, faster and more efficiently, and you'll have peace of mind knowing that Land Pride will stand behind it.

Scan for full specs, 3D spins, features, and product videos.





ROTARY TILLERS

RTR05 Series: Up to 26 HP

- 42" & 50" Working widths
- 4 C-shaped blades per flange
- 13" Rotor swing diameter
- 6-1/2" Maximum tilling depth*
- Reverse rotation

RTA/RTR12 Series: 15-60 HP

- 42", 50" & 58" Working widths
- Slip-clutch driveline
- 4 C-shaped blades per flange
- 15" Rotor swing diameter
- 6-1/2" Maximum tilling depth*
- Chain-drive system

RGA/RGR12 Series: 18-60 HP

- 50" & 58" Working widths
- Slip-clutch driveline
- 6 C-shaped blades per flange
- 17" Rotor swing diameter
- 7" Maximum tilling depth*
- Gear-drive system
- Additional sizes available for larger tractors



QUICK-HITCHES

QH16 Series: Cat. 1

- 2,000 lb. Lifting capacity
- Automatic lock on lower 3-point arms
- Optional floating top link



ALL-FLEX MOWERS

AFM4211: 30-65 HP

- 11'1" Working width
- 6" Deck overlap eliminates skipping
- Rear discharge decks
- Narrow transport width
- Professional series



RCR12



RTA/RGA models are forward rotation. RTR/RGR models are reverse rotation.

*Tilling depth depends on conditions and fluffiness of tilled area. Multiple passes may be required.

Visit landpride.com for specific HP requirements.



GROOMING MOWERS

FDR16 Series: 15-40 HP

- 48" & 60" Working width
- Rear discharge
- Single B-section belt
- 3-1/4" x 10" Solid gauge wheels
- 3/16" Deck thickness
- 3/4" to 3-1/4" Cutting height
- Medium lift blades standard, optional mulching blades available
- Additional sizes available for larger tractors



FLAIL MOWERS

FM25 Series: 33-80 HP

- 60" Working widths
- Cutting capacity:
  - 1" w/duckfoot knives
  - 1.5" w/heavy-duty Y knives
  - 2" w/hammer knives
- 0"-6" Variable cutting height
- Additional sizes available for larger tractors



ROTARY CUTTERS

RCR12 Series: 18-60 HP

- 42", 48" & 60" Working widths
- Front and rear guards
- 1-1/4" - 10" Cutting height
- Additional size available for larger tractors

RCR15 Series: 20-60 HP

- 48" Working widths
- 1-3/4" - 11-1/2" Cutting height
- 2" Diameter cutting capacity






SEED BED ROLLER

SBR Series: 18-52 HP

- 72" Working width
- 11" Roller diameter
- Optional tongue, 2" ball hitch
- Transport tires on pull-type
- Optional Drag Harrow shown

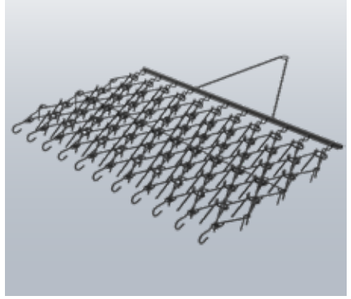

DRAG HARROWS

DRG Series: 8-16 HP

- 4', 6', & 8' Working widths
- 1/2" Tine diameter
- High carbon steel tine construction



POWERED RAKES

PR10: 18-33 HP

- 48" & 60" Working widths
- Cat. 1
- 15° Left or right angling capabilities
- Optional hydraulic angle



FSP700

FERTILIZER SPREADERS

PTS Series: 15-50 HP

- 350 lb. & 563 lb. Capacity
- Two hopper sizes
- Pull-type with 2" ball
- Spin-type broadcast spreader
- Ground driven
- Plated vanes and spinner


FSP Series: Min. 15-20 HP

- 350 lb., 563 lb., & 673 lb. capacity
- Cat. 1 hitch
- Spin-type broadcast for even spreading
- Adjustable delivery patterns

PFS Series: Min. 15-20 HP

- 925 lb. & 1,150 lb. Capacity
- Pendulum-type
- Heavy-duty tubular frame
- 20-46 ft. Spreading width
- Additional size available for larger tractors

FIELD CULTIVATORS

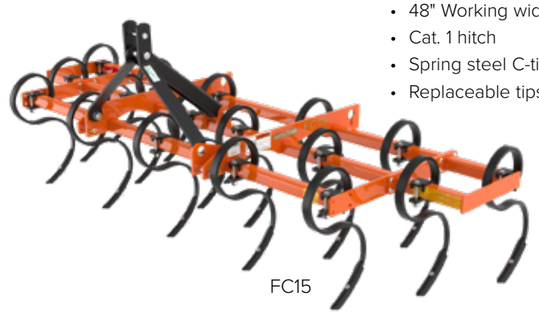

FC15

FC10 Series: Up to 45 HP

- 48" Working width adjustable to 57"
- Cat. 1 hitch
- Spring steel C-tines
- Replaceable tips

FC15 Series: Up to 50 HP

- 72" Working width
- Cat. 1 3-point hitch
- 4" Working depth
- 2 x 2 Square tubing frame
- Optional extensions create 96" working width (LP exclusive)
- Available hitch to pull LP Drag Harrow

Visit landpride.com for specific HP requirements.



ARENA GRADERS

AG15 Series: 18-55 HP

- 60" & 72" Working widths
- 4" Working depth
- Adjustable leveling bar
- Adjustable rolling basket - mesh or pipe
- Additional width available for larger tractors



GRADING SCRAPERS

GS05 Series: 17-33 HP

- 48" & 60" Working widths
- Heat-treated shanks & cutting edges
- Replaceable skid shoes

GS15 Series: 20-50 HP

- 48" & 60" Working widths
- Heat-treated shanks
- 1/2" x 6" Cutting edges, reversible & replaceable
- Replaceable skid shoes
- Optional rear facing blade
- Additional sizes available for larger tractors



BOX SCRAPERS

BB12 Series: 17-30 HP

- 48", 54", 60" & 66" Working widths
- 2-1/2" x 15" Shanks
- 15" Moldboard
- Reversible & replaceable cutting edge
- Additional size available for larger tractors

BB15 Series: 17-40 HP

- 60" & 66" Working widths
- 4 Position adjustable shanks
- 17" Roll-formed moldboard
- Reversible & replaceable cutting edge
- Additional size available for larger tractors

BB25 Series: 25-55 HP

- 60" & 66" Working widths
- 4 Position adjustable shanks
- 17" Roll-formed moldboard
- Clevis type lower hitch
- Additional size available for larger tractors

TOP & TILT



Land Pride Top & Tilt Kits add versatility to your tractor 3-point. These popular kits can be used to easily adjust the top link fore and aft and with a 3-spool kit, operators can adjust a hydraulic accessory on an implement – raise and lower hydraulic shanks for example.





RB26

REAR BLADES

RB05 Series: 17-25 HP

- 48" & 60" Working widths
- Angle and offset
- 13-1/2" Moldboard

RB15 Series: 17-40 HP

- 60" & 72" Working widths
- Angle and offset capabilities
- 14" Moldboard with replaceable cutting edge
- Additional width available for larger tractors

RB16 Series: 20-40 HP

- 60" & 72" Working widths
- Tilt, angle, and offset capabilities
- Optional hydraulic angling
- 14" Moldboard with replaceable cutting edge
- Additional width available for larger tractors

RB26 Series: 25-60 HP

- 72" Working width
- Tilt, angle, and offset capabilities
- 17-1/2" Moldboard with replaceable cutting edge
- Additional width available for larger tractors

LANDSCAPE RAKES

LR05 Series: 15-25 HP

- 48" & 60" Working widths
- 5 Forward angles
- Rear Blade adaptable



LR05

LR16 Series: 20-40 HP

- 60" Working width
- 1" High carbon spring steel teeth
- 7 Angle positions up to 45°
- Rear Blade adaptable
- Additional sizes available for larger tractors

Visit landpride.com for specific HP requirements.



CORE AERATORS

CA15 Series

- 48", 56", 64", & 72" Working widths
- Cat. 0, 1, 1 Ltd.
- 1/2" Hardened steel spoon material
- 6" Spoon spacing
- Up to 4-1/2" spoon penetration
- Expanded metal weight tray



CA25 Series: Pull-Type

- 60" & 72" Working widths
- Cat. 1 hitch
- 5-1/2" & 6-1/2" Spoon spacing
- 4-1/2" Spoon penetration
- Optional water tanks for additional weight
- Storage stand on each corner for stability



DISC HARROWS

DH10 Series: Up to 40 HP

- 48" & 60" Working widths
- Notched or smooth discs
- 2" Square tube frame
- 7-1/2" Blade spacing
- Adjust gangs up to 21°



POST HOLE DIGGERS

PD10 Series: 15-30 HP

- 6", 9", and 12" Augers
- 30 HP Gearbox
- 2" Output shaft
- Available Down Pressure Kit

PD15 Series: 20-40 HP

- 6", 9", and 12" Augers
- 2" Output shaft
- Shear-pin protection
- 48" Auger length
- Available Down Pressure Kit

PD25 Series: 25-55 HP

- 6" - 24" Augers
- 2" Output shaft
- Cat. 3 Driveline with shear-pin or radial-pin protection
- Available Down Pressure Kit

PD35: 30-75 HP

- 6" to 24" Augers
- 2-7/8" Yoke tubing
- 2" Gearbox output shaft
- Available Down Pressure Kit
- Cat. 3 Driveline with shear-pin or radial-pin protection

HD25: 5-12 GPM

- Cat. 1 or 2, or bucket mount
- 2-7/8" Tubing
- 2" Output shaft
- 6" - 24" Augers
- Hydraulic drive

SA10 Series: 4-8 GPM

- Hydraulic Planetary Gearbox
- Hydraulically Reversable
- 2" Round Output Shaft
- 6"-12" Augers in 30" or 48" lengths






CLAW GRAPPLES

SGC06 Series: Up to 40 HP

- 60" Working width
- High tensile AR400 steel
- 35" Jaw opening
- Optional 3rd Function Valve

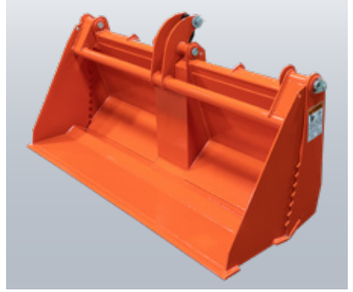

COMBO BUCKETS


CB0654 Series: Up to 39 HP


- 54" Working width
- Universal Quick-Attach
- 4-in-1: dig, drag, doze, and clamp
- 8.5 cu.ft. Heaped



3RD FUNCTION VALVES

Accessory kits adds versatility and value to your tractor and are available for select Kubota tractors



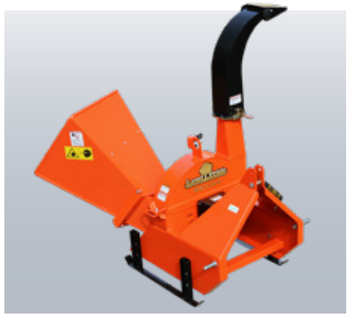


WOOD CHIPPERS

WC1503 Series: 12-30 HP

- 3" Diamater limb capacity
- 2 Hardened steel cutting knives
- 4-1/2" Rotor pulley diameter
- Adjustable support stands

WC1504 Series: 20-50 HP

- 4" Diameter limb capacity
- 3/16" Main frame thickness
- Direct drive to motor
- 4 Hardened steel cutting knives
- Adjustable support stands

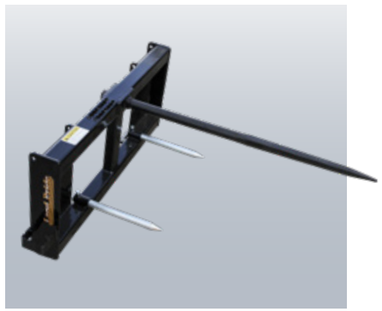

BALE SPEARS

BS10

- 1,800 lb. Lift capacity
- Usable spear length: 45" upper & 19" lower
- Universal Quick-Attach

BSR10

- 1,800 lb. Lift capacity
- 3-Point Cat. 1 or Cat. 2
- Usable spear length: 44" upper, 19" lower



WEIGHT BOXES

WB10

- Cat. 1 Quick-Hitch compatible
- Up to 600 lb. weight capacity
- Shown with optional riser stand

PALLET FORKS

PFL20 Series

- Universal Quick-Attach or front loader plate
- 2,100 lb. Lift capacity
- 4" Tine width
- 1" Tine height



PFL20

Visit landpride.com for specific HP requirements.



SPL10

SNOW PUSHERS

SPL10 Series: 25-45 HP

- 60" & 72" Working widths
- Universal Quick-Attach
- 24" Tall x 24" deep
- 10 ga. Moldboard with 1/4" sides
- Optional rubber or steel blade
- Optional pullback blade
- Replaceable AR400 skid shoes
- Additional width available for larger tractors



SNOW TRIP BLADES

STB05 Series: 17-30 HP

- 54" & 60" Working widths
- Universal Quick-Attach
- 22° Angling capabilities both ways
- 17" Curved moldboard, 12 Ga.
- Steel or poly blade options

STB10 Series: 25-40 HP

- 60" & 72" Working widths
- 21" Curved pusher blade
- Dual trip springs for frame protection
- Hydraulic angle option available
- AR400 Skid shoes



SNOW BLOWERS

Inverted/Hybrid 15-55 HP

- 54", 64" and 74" Working widths
- 22" x 6" or 24" x 7" Impeller
- 3-Pt inverted design
- Optional hydraulic chute rotator

For all snowblower options, please see the Snow Solutions brochure on kubota.ca



PERFORMANCE MATCHED

This process ensures you that the horsepower, rating, weight, and width of your implement matches your tractor's exact specifications

PRODUCTS IN ACTION

See products in action, view product spins, and find full specs and manuals at **landpride.com**

LOCATE A DEALER

Find your closest dealer at **kubota.ca**

SHOPLANDPRIDE.COM

Find apparel, hats, cups, bags, bar stools, and more at **ShopLandPride.com**

Visit landpride.com for specific HP requirements.



A Division of Great Plains Mfg., Inc.
1525 E. North St. • P.O. Box 5060
Salina, Kansas 67401
Visit Kubota's Dealer Locator at kubota.ca

Revised by KCL
September 2026

Land Pride is a registered trademark of Great Plains Mfg., Inc.