KUBOTA CANADA LTD.

Head Office: 1155 Kubota Drive, Pickering, Ontario, L1X 0H4 TEL: 1 800-405-6916

Visit our web site at: www.kubota.ca



KUBOTA 4WD DIESEL UTILITY VEHICLE RIVERSEL UTILITY VEHICLE

RUBOTA 4WD DIESEL UTILITY VEHICLE

For Earth, For Life Kubota



The new Kubota RTV-X Series

RTV-X CAB

This workhorse diesel-powered Utility Vehicle is the epitome of comfort. With a factory-installed fully enclosed cab, air conditioning, heating and defrost; you can rest-assured you will remain comfortable no matter the weather. Combine that with the utility-performance you expect from our X-Series lineup, and you have a machine that makes even the toughest jobs a breeze.

RTV-X

When you have a job to get done look no further than the RTV-X. Seating for two and powered by our Kubota diesel engine, this machine is driven to do more. From farms to universities, construction sites to hunting, and everywhere in between. The RTV-X helps power your productivity and won't stop until the job is complete.

RTV-X CREW


Easily transform the machine from a 1-row model with extra cargo bed space to a 2-row machine for additional passengers. Much like the other models in the X-Series lineup, the RTV-X CREW powers your productivity, is tough and dependable and makes you reimagine what a utility-vehicle is capable of.

RTV-X LONG BED

This long bed model holds true to the legacy of the RTV-X Series with the Kubota Diesel Engine, VHT-X transmission, hydraulic dump box and power steering that have made the X-Series so popular. With it comes a suite of new features like the long bed cargo box, ProKonvert functionality, and exclusive cargo box accessories no matter what job you have to get done, or how you like to spend your free-time, the RTV-X LONG BED is driven to do more!



BUILT TO OUTWORK

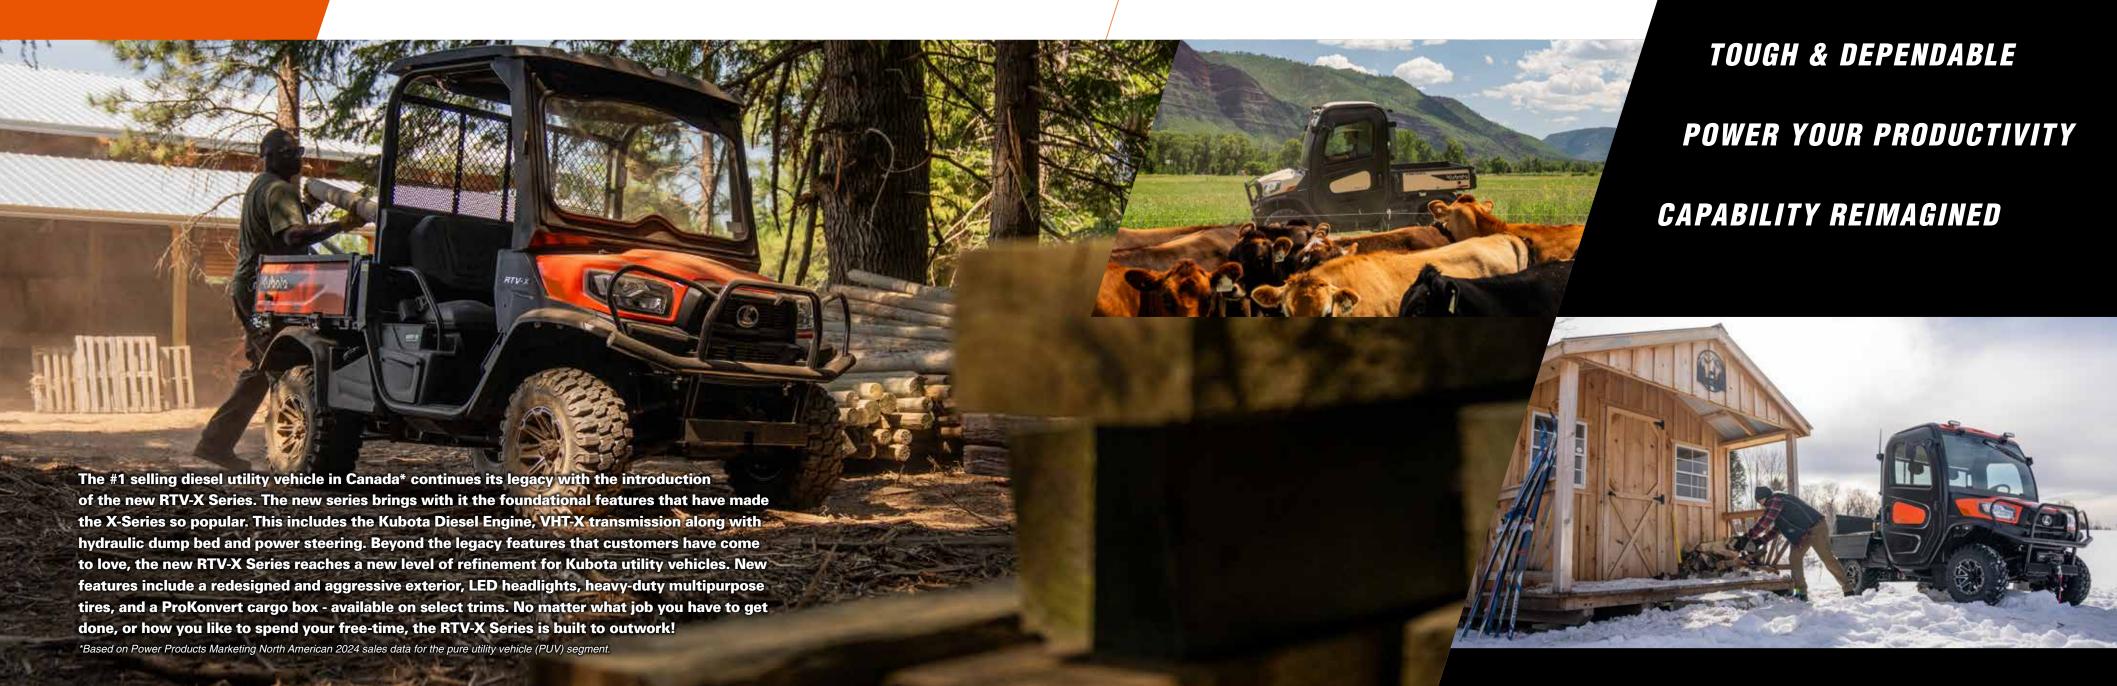

TOUGH & DEPENDABLE



VHT-X (Variable Hydraulic Transmission)

Kubota's VHT-X provides exceptional performance on various terrain with smooth and powerful acceleration. Low-speed driving is made exceptional through smooth throttle control, great traction and maneuverability with or without loads.

Wet Disk Brakes


The RTV-X Series uses multi-disk wet brakes which provide an excellent brake life. You'll also feel more secure, especially when traveling down long inclines, knowing that dynamic braking is helping to provide additional stopping power and greater driving control.

Radiator Grill

Open the hood, and you'll find the radiator and air-intake located high and up front, where the air is cleaner and cooler. This helps both radiator performance and allows for quick access. Kubota's wide fin pitch design recduces clogging, further improving radiator performance.

KUBOTA DIESEL ENGINE





The legacy of the X-Series begins with the Kubota Diesel Engine at the heart of the new RTV-X. From towing and hauling to running through rough terrain the power provided by the engine ensures the machine will consistently show up to work as hard as you.

Full Steel Frame

The high-rigidity steel frame helps isolate the occupants from noise and vibration. The structural strength of this frame can hold up to many different tasks and seasons, to help you power your productivity.


CV Joint Guard & Underbody Skid Plate

CV joint guards and heavy duty skid plates will protect the most critical parts of the engine and transmission

Steel Cargo Bed (Spray-on Bed Liner)

An optional factory-installed bed liner helps protect the cargo bed from dirt and damage. Four tie-down hooks in the corners help keep loads in place.

POWER YOUR PRODUCTIVITY

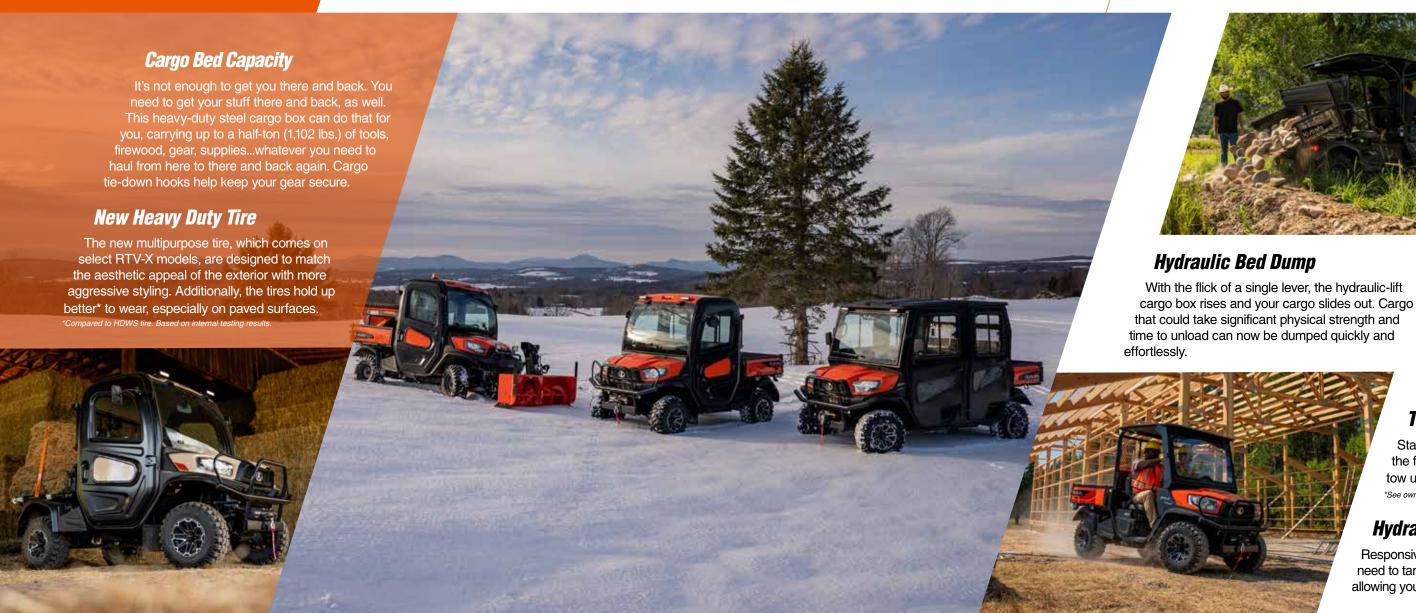

Dynamic Brakes

The VHT-X transmission allows for dynamic braking, which slows the vehicle down when you remove your foot from the throttle, providing a sense of confidence while traveling down slopes. Whether on the job site or around your property, one pedal operation is convenient when doing frequent stops.

Towing Capacity

Standard two-inch hitch receivers are located at the front and back. The back receiver lets you tow up to 1,300 lbs.*

*See owner's manual for detail.

Hydraulic Power Steering

Responsive hydraulic power steering helps give you the control you need to tame almost any terrain. The steering wheel is tilt-adjustable, allowing you to set the optimum angle for your driving style.

Full-time 4WD

The selectable full-time 4WD system ensures outstanding traction under a wide range of terrain. The 4WD system can easily be turned off when 2WD is sufficient for current driving conditions.

Limited-Slip Differential

True 4WD with a limited-slip front differential and a locking rear differential help reduce wheelspin to a minimum, giving you greater control and grip on snow or muddy terrain.

CAPABILITY REIMAGINED



PROKONVERT CARGO BED



3-Way-Open

The new bed design allows you to open from either side, or the rear - especially useful for easily loading items in the back of the bed.

Bed Liner

The heavy duty steel cargo bed is built for tough work, but we don't stop there. We utilize a spray on liner to help reduce scratches and dents, for a more durable loading surface.

Flatbed Conversion

When loading bulky or awkwardly shaped materials, or having to load the bed with another piece of equipment, you can easily convert the cargo bed into a flatbed without the use of any tools. *Available on select trims.

LED Headlights

For the jobs that begin well-before the sun rises and continue on long-after the sun sets, the new LED headlights not only look good, they illuminate the way so you can stay focused on the job at hand.

Maneuverability With Loads

Vehicle performance is one thing, but being able to maintain consistent performance under pressure is another. The vehicle handles extremely well with cargo in the bed - especially valuable for those moving materials, tools or equipment throughout the day.

Specialized Cargo Dump

The VHT-X transmission allows you to utilize a hydraulic bed dump*, which raises and lowers much easier and faster than the competition. Additionally, you are able to control the speed of the movement when precision is needed. *Optional on basic models.

PRODUCTIVITY RTV-X LONG BED



Cargo Bed Winch

When used in conjunction with the tailgate extender, loads that humans cannot lift can easily be winched into the cargo bed. The bed winch can pull up to 750LB with ease and can be operated with a wireless remote control.

Tailgate Extender

Take the strain out of heavy lifting with our innovative tailgate extender. Designed to work seamlessly with a cargo winch, it enables effortless loading of heavy items into your cargo bed - no manual lifting required. When not in use, it folds away, saving space and eliminating the need for removal.

LED Light Cargo Panel

Two 6" LED lights illuminate the cargo bed, making it easier to work in the early morning or late evening.

Most existing Kubota accessories are compatible with the RTV-X LONG BED.

K-VERTIBLE RTV-X CREW



ALL-WEATHER RTV-X CAB



rated towing capacity from 1300lbs to 2204lbs.

K-CONNECT ATTACHEMENTS



4-Point & PTO Drive K-Connect

K-Connect is a fast & reliable connection system that allows for tool-less connecting and disconnecting of front attachments. The 4 point hitch and power pack can be easily removed for seasonal



LED lights





Front grill adaptor kit



4 point hitch

Control handle & PTO switch.

Simple intuitive control for all implements.



Snowblower 66"

The 66" professional grade PTO driven snowblower is two stage and has four fan blades, this allows it to throw snow further than the competition. Hydraulic chute rotation and deflector are standard.



Sweeper 66"

66" wide PTO driven sweeper turns at more than 240 rpm. Standard polyethelene brushes loaded with 34 (24" diameter) wafer brushes that can easily be replaced within 20 minutes.



V-Plow 78"

With a maximum width of 78" the heavy duty V-Plow will tackle the toughest of winter storms. Double acting cylinders hold the blade in place

when back dragging and selectable down pressure ensures a clean scrape when required.





Straight Blade 78"

78" wide blade you can rely on. The blade curvature has been designed to roll snow forward increasing productivity. Down pressure can be selected to scrape packed or driven over snow.

ELEVATE VERSATILITY (Accessories)

COMFORT

You never know what the day may bring, but you can be prepared by installing cab components onto your RTV-X for a more comfortable experience. We offer a variety of windshield, roof, rear panel and door options to help protect you from the elements.




PRODUCTIVITY

We have a variety of options to help increase productivity, or to make your experience more enjoyable. LED work lights, light bar, winches, and telematics are a few of the available options

Worker smarter, not harder with an accessory portfolio that is willing to work as hard as you. We offer a variety of items to make your machine even more versatile. From a debris blower to clear a job site to spreaders and sprayers to apply applications, we leave no stone unturned.

For Optional Cab and variety accessories, please see RTV's accessories and attachment brochure or visit our website, "www.Kubota.ca".









SPECIFICATIONS

Model name			RTV-X			RTV-X LONG BED			
Grade	(1000) 医原理性 (1000) [1000] (1000)	49 K 8 9	Basic	Standard	Premium	Standard	Standard		
olor	THE RESERVE		Orange	Orange, Camo	Orange, Camo, Desert Sand	Orange	Orange		
1000	Make and model		KUBOTA D1105-E4-UV						
100	Туре	TASI IBIV 2	A STATE OF THE REAL PROPERTY.	3-0	cylinders, 4-cycle, diesel, OH	V			
Engine	Displacement	cu.in (cc)	16.	1	68.5 (1,123)	- 3.60 kg/s/2010 11 1.24 kg/3/k			
	Horsepower (SAE J1995) +	HP (kW) / rpm	A STATE OF THE STA	Marie The Contract of	23.3 (17.4) @3,000				
	Cooling system	3 11	A LOSSON FOR	A STATE OF THE PARTY OF THE PAR	Liquid				
	Battery		670 CCA						
ransmiss	sion	- Table	27	Varia	able hydro transmission (VHT	Γ-X)			
ear sele	ection	DIN THE STREET	CONTRACTOR OF THE PARTY	Hi-Lo	o range forward, neutral, reve	erse	A SHALL WELL AND A SALE OF THE		
lax. trave	eling speed k	km/h (mph)			0-40 (0-25)				
WD	Front differential	1.07 (May 15 A) (A)	Limited-slip differential						
ystem	Rear differential		Foot operated differential lock						
teering			Hydrostatic power steering						
Front / Bear		Wet-disk brakes							
Brakes	Parking brake			The second second second second second	Rear wheel, hand operated	Maria Carlos Car			
7 10 2 7 7 5	Front / Bear		Independent, Dual A-arms with adjustable spring preload / Independent with coil over shock						
Suspension -	Front / Rear suspension travel in. (mm)		TOTAL STREET		8 (205) / 8 (205)				
around	Front	in. (mm)	1409	10.4 (265)		11.2	? (285)		
elearance	Rear	in. (mm)	THE REAL PROPERTY.	10.3 (260)	The state of the s	200744111110	(240)		
leadlight		()	LED (Low) LED (High / Low)						
		re in (mm)	2.0 (50.8) steel tube						
Occupant Protective System (OPS)			2-point						
	Certification		SAE J2194 and OSHA 1928 ROPS						
(0P5)									
	Length Width	in. (mm)	120.1 (3,050) 122.4 (3,110) 123.0 (3,123)		154.5	(3,925)			
	Height, overall	in. (mm)	63.2 (1,605)			11 6	- Wallet		
)imanajana	Front tread centers	in. (mm)		79.5 (2,020) 48.8 (1,240)		FO 4	(1.080)		
Dimensions	Rear tread centers	` ′	· · · · · ·			50.4 (1,280) 50.4 (1,280)			
	Wheelbase	in. (mm)		48.8 (1,240)			1		
		in. (mm)		80.5 (2,045)	The second secon	98.2 (2,495)			
1 6 10 10	Turning radius	ft. (m)		13.1 (4.0)		17.1 (5.2)			
Veight		lbs. (kg)	2,050 (930)	2,072 (940)	2,099 (952)	2,355	(1,068)		
owing ca	· · · · · · · · · · · · · · · · · · ·	lbs. (kg)		787	1,300 (590)				
Payload capacity Ibs. (kg)		lbs. (kg)	1,521 (690) 1,499 (680) 1,472 (668) 1,645 (746) Steel		5 (746)				
	Material	THE NAME AND THE							
Cargo bed	Width × Length × Depth	in. (mm)	57.7 (1,465) × 40.5 (1,030) × 11.2 (285)			54.5 (1,384) × 72.3 (1,837) × 11.6 (294)			
	Volume	cu. ft. (m³)	15.2 (0.43)		2 X 3 X 1 X 1 X 2 X 2 X 2 X 2 X 2 X 2 X 2 X 2	26.4 (0.74)			
	Bed height (unloaded)	in. (mm)	34.9 (887)		SECONS VICTORIA DE LA MARCO DEL MARCO DEL MARCO DE LA MARCO DEL MARCO DE LA MARCO DE LA MARCO DEL MARCO DE LA MARCO DEL LA MARCO DE LA MARCO DEL LA MARCONDO DEL LA MARCO DEL LA MARCO DEL	35.4 (900)			
	Capacity	lbs. (kg)		1,102 (500)	March Voltage Control of the Asset Control	N. KARIL - D. S. ANIMARK - NO. J. OPER J. S.	2 (550)		
	Hydraulic bed lift	.56. (Ng)	Available	Equipped		Equipped	KO 2002 SOLZ - KOLD WALL		
	Spray-on bed liner		Not available	(Orange) Available, (Camo) Equipped		Equipped			
	ProKonvert		Not available	Not available	The second secon	Equipped			
uel tank	capacity	L (U.S. gal)	140t avallable	Not available	30 (7.9)	Equipped			
					84				
Sound rating at operator's ear at max rpm db. (A) ATV (All Terrain)		25 × 10-12, 6-ply (Camo) Equipped, (Orange, Desert Sand) Available 25 × 10-12, 6-ply -							
Tires	HDMP (Heavy Duty Multi	i-Purnose)		ly (Camo) Equipped, (Orange, De ly (Orange, Desert Sand) Equipp			25 × 10-12, 6-pl		
Alloy wheel			Available	Available	(Orange, Camo) Available	- 25 x 10-12, 6-p			
Standard front guard					(Desert Sand) Equipped		the second of the second		
standard	front guard		Basic	Standard	Premium	Sta	ndard		

RTV	-X CREW	RTV-	X CAB	RTV-X CAB HD				
Standard	Premium	Standard	Premium	Standard	Premium			
Orange, Camo	Orange, Camo, Desert Sand	Orange, Camo	Orange, Camo, Desert Sand	Orange	Orange			
W 100 S 100 S		KUBOTA D)1105-E4-UV		2000 CHR 1870-0			
0.000	DAM	3-cylinders, 4-c	ycle, diesel, OHV					
MARKET IN	NOTICE AND DESCRIPTION OF THE PERSON OF THE	68.5	(1,123)					
NAME OF		23.3 (17.	4) @3,000					
TAXABLE IN		Lio	quid					
Electrical es		670	CCA					
A TRESPER A	Variable hydro tra	nsmission (VHT-X)		Variable hydro transmissior	high durability (VHT-X I			
	Marie State of the	Hi-Lo range forwa	ırd, neutral, reverse	and the same of the same of	Last Mark and			
	A STATE OF THE STA	0-40	(0-25)					
NO LA NOVEMBER DE		THE RESIDENCE AND ADDRESS OF THE PERSON NAMED IN COLUMN TWO IN COLUMN TO ADDRESS OF THE PERSON NAMED IN COLUMN TO ADDRE	p differential	Marin Marin St.				
	the state of the same of the same of	Foot operated	differential lock	The state of the s	A CONTRACTOR OF THE PARTY OF TH			
Market 1	File Sybulya TT /	Hydrostatic p	oower steering		A CONTROL OF THE PARTY OF THE P			
		Wet-dis	sk brakes		Name and Address of the Owner, where			
	COLUMN TO LAND TO THE PARTY OF		hand operated					
	Independent, Dual A	A-arms with adjustable sp	ring preload / Independent v	with coil over shock	COLUMN TO THE RESERVE			
E380381E	2010	8 (205)	/ 8 (205)					
///////////////////////////////////////	.2 (285)	10 may 17 mg (1)	10.0 (2	255)				
9.	4 (240)	A SURVEY OF THE SECOND	9.9 (2	250)				
		LED (Hi	gh / Low)					
SECTION AND ADDRESS OF	TECHTO		steel tube					
	CARSON AND AND AND AND AND AND AND AND AND AN	The second secon	point					
	0070800	SAE J2194 and 0	OSHA 1928 ROPS		Jo.			
142.1 (3,610)		122.0 (3,100)	123.0 (3,123)	122.0 (3,100)	123.0 (3,123)			
63.2 (1,605)		65.4 (1,660)						
	7 (2,025)	81.9 (2,080)						
	1 (1,280)	48.8 (1,240)						
	1 (1,280)	48.8 (1,240)						
	2 (2,495)	80.5 (2,045)						
	7.1 (5.2)	STORY OF THE STATE	13.1 (` '	The state of the s			
2,39	2 (1,085)	2,414 (1,095)	2,441 (1,107)	2,447 (1,110)	2,473 (1,122)			
		(590)		2,204	· · · · · · · · · · · · · · · · · · ·			
1,6	07 (729)	1,585 (719)	1,558 (707)	1,552 (704)	1,525 (692)			
		S	teel					
	× 26.0 (660) × 11.2 (285)	NO DECEMBER 1	57.7 (1,465) × 40.5 (1,030) × 11.2 (285)				
row 1 : 0.54 (19	1) row 2 : 0.28 (9.9)	15.2 (0.43)						
35	.4 (900)	34.9 (887)						
row 1 : 1,102 (50	00) row 2 : 661 (300)	1,102 (500)						
		Equ	ipped					
ige) Available, (Camo) Equipp	ed Equipped	(Orange) Available, (Camo) Equipped	SACROPARE DE LA COMPANION DE L	Equipped				
Not available		Not available	Equipped	Not available	Equipped			
	的一个。	30	(7.9)	ENCLOSE PROPERTY.	W. W. K. B. P. L. B. P. S. S. S. S.			
######################################	大元四年四岁的历史16年18年1		83					
25 ×	10-12, 6-ply (Camo) Equippe	ed, (Orange, Desert Sand)	Available	Available				
NAME AND ADDRESS OF TAXABLE PARTY.	10-12, 6-ply (Orange, Deser	rt Sand) Equipped, (Camo) A	Available	Equipped				
25 ×								
25 × Available	(Orange, Camo) Available (Desert Sand) Equipped	Available	(Orange, Camo) Available (Desert Sand) Equipped	Avai	lable			

*"Realtree" is a registered trademark of Jordan Outdoor Enterprises, Ltd. The company reserves the right to change the above specifications without notice. The values in "Ground clearance" and "Weight" are those of the machine equipped with the tires in the table above

table above. For off-highway use only.

Kubota Canada Ltd. reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for Canada only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

Kubota Genuine Parts for excellent performance, durability and safety

