KUBOTA CANADA LTD.

Head Office: 1155 Kubota Drive, Pickering, Ontario, L1X 0H4 TEL: 1 800-405-6916

Visit our web site at: www.kubota.ca






For Earth, For Life Kubota



DRIVEN TO DO MORE

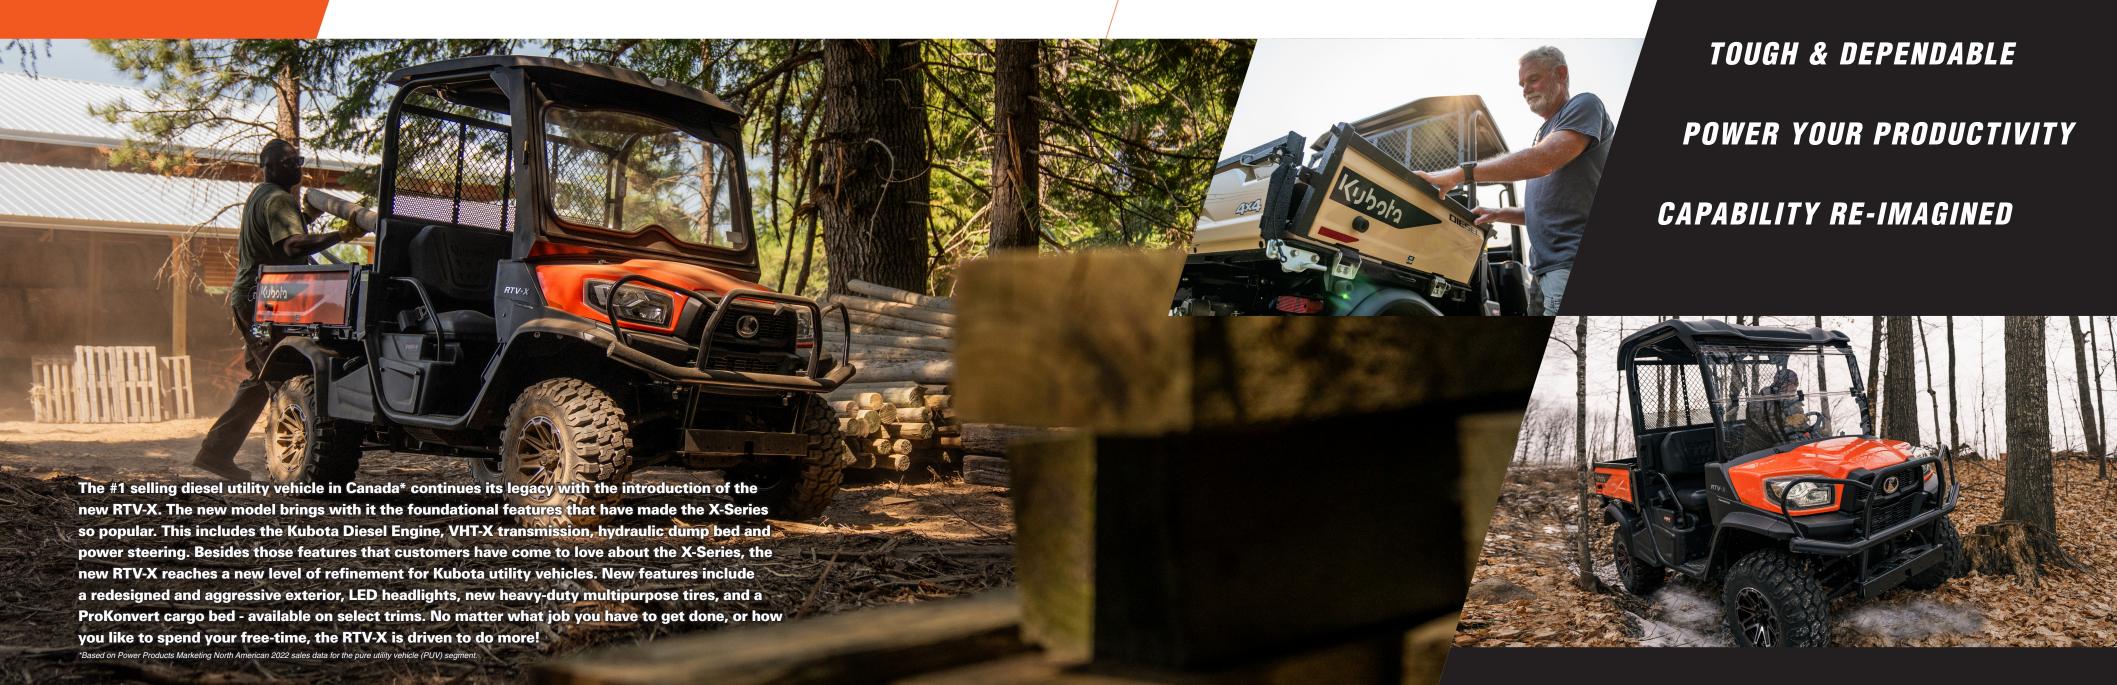

TOUGH & DEPENDABLE



VHT-X (Variable Hydraulic Transmission)

Kubota's VHT-X provides outstanding performance on various terrain with smooth and powerful acceleration. Low-speed driving is made exceptional through smooth throttle control, great traction and maneuverability with or without loads.

Wet Disk Brakes


The RTV-X series uses multi-disk wet brakes which provide long brake life. You'll also feel more secure, especially when traveling down long inclines, knowing that dynamic braking is helping to provide additional braking power and greater driving control.

Radiator Grill

Open the hood, and you'll find the radiator and engine air-intake located high and up front, where the air is cleaner and cooler. This helps both radiator performance and simplifies maintenance. Kubota's wide fin pitch design recduces clogging, further improving radiator performance.

KUBOTA DIESEL ENGINE





The legacy of the X-Series begins with the Kubota Diesel Engine at the heart of the new RTV-X. From towing and hauling to running through rough terrain the power provided by the engine ensures the machine will consistently work as hard as you.

Full Steel Frame

The high-rigidity steel frame isolates the occupants from noise, vibrations, and harshness. With structural strength that few in the industry can match, this durable frame can take years of punishment from heavy loads and rough terrain*.

*See owner's manual for details.

CV Joint Guard & Underbody Skid Plate

CV joint guards and heavy duty skid plates will protect the most critical parts of the engine and transmission

Steel Cargo Bed (Spray-on Bed Liner)

An optional factory-installed bed liner helps protect the cargo bed from dirt and damage. Four tie-down hooks in the corners help keep loads in place.

POWER YOUR PRODUCTIVITY



Dynamic Brakes

One of the major benefits of the VHT-X transmission is the dynamic braking, which slows the vehicle down when you remove your foot from the throttle. It also provides drivers a sense of confidence as they travel down slopes. The ability to utilize one pedal operation creates a great experience, for both novice and experienced drivers alike providing a heightened sense of security.

Towing Capacity

Standard two-inch hitch receivers are located at the front and back. The back receiver lets you tow up to 1,300 lbs.* of gear.

*See owner's manual for detail.

Hydraulic Power Steering

Responsive hydraulic power steering helps give you the control you need to tame any terrain. The steering wheel is tilt-adjustable, allowing you to set the optimum angle for your driving style.

Full-time 4WD

The selectable full-time 4WD system ensures outstanding traveling performance even under heavy loads, providing superior traction and excellent control under a wide range of terrain conditions. The 4WD system can easily be turned off when 2WD is sufficient for current driving conditions.

Limited-Slip Differential

True 4WD with a limited-slip front differential and a locking rear differential help reduce wheelspin to a minimum, giving you greater control and a smoother ride on rough or muddy terrain.

CAPABILITY RE-IMAGINED

PROKONVERT CARGO BED*1



3-Way-Open

When you have a job to get done, being able to easily load and unload the cargo bed is critical. The new bed design allows you to open from either side, or the rear - especially useful for easily loading items in the back of the bed.

Bed Liner*2

The steel cargo bed is a big advantage for our Kubota X-Series, but we don't stop there. On the new cargo bed, we utilize a spray on liner to help reduce scratches and dents, for a more durable loading surface.

*2 Available for Standard and Premium models only.

Flatbed Conversion

For customers loading bulky or awkwardly shaped materials, or having to load the bed with another piece of equipment, customers can easily convert the cargo bed into a flatbed without the use of any tools. A shining example of capability re-imagined.



LED Headlights

For the jobs that begin well-before the sun rises and continue on long-after the sun sets, the new LED headlights not only look good, they illuminate the way so you can stay focused on the job at hand.

Maneuverability With Loads

Vehicle performance is one thing, but being able to maintain consistent performance under pressure is another. The vehicle handles extremely well with cargo in the bed - especially valuable for those moving materials, tools or equipment throughout the day.

Specialized Cargo Dump

The VHT-X transmission allows us to utilize a hydraulic bed dump, available on Standard and Premium models, which raises and lowers much easier and faster than the competition. Additionally, you are able to control the speed of the movement for more precise applications.



ELEVATE VERSATILITY (Accessory)

CAB COMPONENTS

You never know what the day may bring, but you can be prepared by installing cab components onto your RTV-X for a more comfortable experience. We offer a variety of windshield, roof, rear panel, door options and heater kits to help protect you from the rugged Canadian seasons.



ELECTRONICS


We have a variety of electronic options to help increase productivity, or to make your experience more enjoyable.

LED work lights, light bar, and telematics are a few of the available options.



WORK

With an accessory portfolio that is willing to work as hard as you we offer winches and spreaders. Our K-Connect and PTO Drive system makes the machine even more versatile by allowing the quick attachment and detachment of a large variety of implements like blades, snowblowers, brooms and a debris blower.



SPECIFICATIONS

Model name			4	RTV-X	Committee and Co	
Grade			Basic	Standard	Premium	
Colour		Orange	Orange, Camo	Orange, Camo, Desert Sand		
Engine	Make and model		KUBOTA D1105-E4-UV			
	Туре		3-cylinders, 4-cycle, diesel, OHV			
	Displacement	cu.in (cc)		68.5 (1,123)		
	Horsepower HP	(kW) / rpm	24.8 (18.5) @ 3000			
	Cooling system		Liquid			
	Battery		670 CCA			
Transmission			Variable hydro transmission (VHT-X)			
Gear selection			Hi-Lo range forward, neutral, reverse			
Max. traveling speed km/h (mph)			0-40 (0-25)			
4WD system	Front differential		Limited-slip differential			
	Rear differential		Foot operated differential lock			
Steering			Hydrostatic power steering			
Brakes	Front / Rear		Wet-disk brakes			
	Parking brake		Rear wheel, hand operated			
Suspension	Front / Rear		Independent, Dual A-arms with adjustable spring preload / Independent with coil over shock			
	Front / Rear suspension travel in. (mm)		8 (205) / 8 (205)			
Ground clearance	Front	in. (mm)	10.4 (265)			
	Rear	in. (mm)	10/40/05/19	10.3 (260)		
Headlights			LED (Low) LED (High/Low)			
Occupant	Tubular overhead structure in. (mm)		2.0 (50.8) steel tube			
Protective System	Seat belts		2-point			
(OPS)	Certification		SAE J2194 and OSHA 1928 ROPS			
Dimensions	Length	in. (mm)	120.1 (3050)	122.4 (3,110)	123.0 (3123)	
	Width	in. (mm)	63.2 (1,605)			
	Height, overall	in. (mm)	79.5 (2,020)			
	Front tread centers	in. (mm)	48.8 (1,240)			
	Rear tread centers	in. (mm)	48.8 (1,240)			
	Wheelbase	in. (mm)	80.5 (2,045)			
	Turning radius	ft. (m)	13.1 (4.0)			
Weight Ibs. (kg)		2,050 (930)	2,072 (940)	2,099 (952)		
Towing capacity lbs. (kg)		ONE OF THE PROPERTY OF THE PRO	1,300 (590)			
Payload o	- Land - A. Contractor of the state of the s	lbs. (kg)	1,521 (690)	1,499 (680)	1,472 (668)	
Cargo bed	Material		Weller Recombined to the	Steel	AND MADE AND	
	Width × Length × Depth	in. (mm)	57.7 (1,465) × 40.5 (1,030) × 11.2 (285)			
	Volume	cu. f. (m ³)	15.2 (0.43)			
	Bed height (unloaded)	in. (mm)	34.9 (887)			
	Capacity	lbs. (kg)		1,102 (500)		
	Hydraulic bed lift	103. (Kg)	Option	Standard	Standard	
	Spray-on bed liner	100 00 00 00 00 00 00 00 00 00 00 00 00	Not available	(Orange) Available, (Camo) Standard	Standard	
	ProKonvert	PARAMORE S	Not available	Not available	Standard	
Fuel tank		ers (U.S gal)	Not available	30 (7.9)	- Standard	
Fuel tank capacity Liters (U.S gal) Sound rating at operator's ear at max rpm db. (A)			30 (7.9) 84			
ATV (All Terrain)		25 × 10-12, 6-ply				
Tires	HDMP (Heavy Duty Multi-Purpose			25 × 10-12, 6-ріу 25 × 10-12, 6-ріу		
Alloy wheels			Option	Option	(Orange, Camo) Available (Desert Sand) Standard	
Standard front guard			B. C.	Champion		
Standard front guard			Basic	Standard	Premium	

*"Realtree®" is a registered trademark of Jordan Outdoor Enterprises, Ltd. The company reserves the right to change the above specifications without notice. The values in "Ground clearance"

The values in "Ground clearance" and "Weight" are those of the machine equipped with the tires in the table above.

For off-highway use only.

Jobat Canada Ltd. reserves the right to change the tact specifications without notice. This brochure for descriptive purposes only and reasonable forts were used to set forth the contained formation, some items shown may be optional and me products shown may not be available at all salerships. Kubota disclaims all representations disvariants, express or implied, or any liability on the use of this brochure. For complete warranty fiety and product information, consult your local Jobat dealer and the operator's manual. Power IP/KW) and other specifications are based on industrial states of the product of the product