L TRACTOR
PERFORMANCE MATCHED ATTACHMENTS



L TRACTOR
PERFORMANCE MATCHED ATTACHMENTS

Land Pride's relationship with Kubota allows our products to be performance matched to your tractor by Kubota and Land Pride Engineering. This process assures you that the horsepower rating, weight, and width of your implement matches the specifications of your L tractor.

All attachment sizes may not be applicable to all L Tractors. Listed sizes are Performance Matched to select L Tractors. Other sizes in the series may be available for other series of Kubota tractors. Options pictured on Kubota tractors may not be available in your location. Visit landpride.com for specific HP requirements and visit kubota.ca to locate your nearest dealer.

This catalog highlights the broad assortment of products engineered to meet the needs of L Series owners. From Grapples to Rakes, Cutters to Tillers, you'll get more work done, faster and more efficiently, and you'll have peace of mind knowing that Land Pride will stand behind it.

Scan for full specs, 3D spins, features, and product videos.





ALL-FLEX MOWERS

AFM4211: 30-65 HP
- 11' 1" Working width
- 6" Deck overlap eliminates skipping
- Rear discharge decks
- Narrow transport width
- Professional series

AFM4214: 40-70 HP
- 14' Working width
- 15" or 18" Deck tires
- Zero turning capabilities
- Standard anti-scalp rollers

AFM4216: 40-70 HP
- 16' 8" Working width
- Three 72" decks
- 8" Deck overlap for zero turning capabilities

AFM4522: 65-100 HP
- 21' 9" Working width
- Commercial-duty 1-5/8" blade spindle with cast iron housing
- 18" Deck tires with sealant
- Rear discharge decks



GROOMING MOWERS

FDR16 Series: 15-40 HP
- 48", 60" & 72" Working widths
- Rear discharge
- Single B-section belt
- 3-1/4" x 10" Solid gauge wheels
- 3/16" Deck thickness
- 48": 3/4" - 3-1/4" Cutting height
  60" & 72": 3/4" - 5-1/4" Cutting height
- Medium lift blades standard, optional mulching blades available

FDR25 Series: 15-60 HP
- 72" Working width
- Rear discharge
- Floating 3-point
- 3/16" Deck thickness
- Solid rubber tires
- Additional size available



FLAIL MOWERS

FM25 Series: 33-80 HP
- 60" & 72" Working widths
- Cutting capacity:
  1" w/duckfoot knives,
  1.5" w/heavy-duty Y knives,
  2" w/hammer knives
- 0"-6" Variable cutting height
- Additional sizes available for larger tractors



ROTARY TILLERS

RTR05 Series: Up to 26 HP
- 42" & 50" Working widths
- 4 C-shaped blades per flange
- 13" Rotor swing diameter
- 6-1/2" Maximum tilling depth*
- Reverse rotation

RTA/RTR12 Series: 15-66 HP
- 42", 50", 58", 66", 74" & 82" Working widths
- Slip-clutch driveline
- 4 C-shaped blades per flange
- 15" Rotor swing diameter
- 6-1/2" Maximum tilling depth*
- Chain-drive system

RGA/RGR12 Series: 18-66 HP
- 50", 58", 66", 74" & 82" Working widths
- Slip-clutch driveline
- 6 C-shaped blades per flange
- 17" Rotor swing diameter
- 7" Maximum tilling depth*
- Gear-drive system

RTA/RTR20 Series: 23-75 HP
- 72" Working widths
- 6 C-shaped blades per flange
- 17" Rotor swing diameter
- 7" Maximum tilling depth*

RTA/RTR25 Series: 25-75 HP
- 70" Working widths
- 6 C-shaped blades per flange
- 17" Rotor swing diameter
- 7" Maximum tilling depth*

RTA35 Series: 35-95 HP
- 76" Working width
- Offset up to 5"
- 6 C-shaped blades per flange
- 19" Rotor swing diameter
- 7" Maximum tilling depth*



RTA/RGA models are forward rotation. RTR/RGR models are reverse rotation.

*Tilling depth depends on conditions and fluffiness of tilled area. Multiple passes may be required.

Visit landpride.com for specific HP requirements.



ROTARY CUTTERS

RCR12 Series: 18-60 HP
- 42", 48", 60" & 72" Working widths
- Front and rear guards
- 1-1/4" - 10" Cutting height

RCR15 Series: 20-60 HP
- 48" Working widths
- 1-3/4" - 11-1/2" Cutting height
- 2" Diameter cutting capacity

RCR18 Series: 20-90 HP
- 60", 72" & 84" Working widths
- 2" Diameter cutting capacity
- Fully welded deck

RCF20 Series: 20-65 HP
- 60" & 72" Working widths
- 2" Diameter cutting capacity
- Smooth top design

RCF27 Series: 35-130 HP
- 60" Working width
- 3" Diameter cutting capacity
- Smooth top design
- Additional sizes available for larger tractors



RCF20



ROTARY CUTTERS

RCR25 Series: 40-110 HP
- 8' & 10' Working widths
- 1-1/2" Diameter cutting capacity
- Choice of tires

RCF30 Series: 40-110 HP
- 8' & 10' Working widths
- 2" - 12" Cutting height
- 2-1/2" Diameter cutting capacity

RCF36 Series: 40-130 HP
- 8' & 10' Working widths
- 10 Gauge deck fully welded
- 3" Diameter cutting capacity

RC2512 Series: 40-100 HP
- 12' Working width
- 10 Gauge deck thickness
- 7 Gauge side thickness
- 1-1/2" Diameter cutting capacity
- Front & rear chain guards

RC2515: 50-100 HP
- 15' Working width
- 10 Gauge deck thickness
- 1/4" Plate side thickness
- 1-1/2" Diameter cutting capacity
- 2" - 13" Cutting height

RC3712: 50-160 HP
- 12' Working width
- 3" Diameter cutting capacity
- 10 Gauge deck thickness
- 1/4" Side thickness



RCF30



RC2512

Visit landpride.com for specific HP requirements.



FSP

SPREADERS

PTS Series: 15-50 HP

- 350 lb. & 563 lb. Capacity
- Pull-type with 2" ball
- Two hopper sizes
- Spin-type broadcast spreader
- Ground driven
- Plated vanes and spinner

FSP Series: 15-20 HP Min.

- 350 lb., 563 lb., & 673 lb. Capacity
- Cat. 1 hitch
- Spin-type broadcast for even spreading
- Adjustable delivery patterns

PFS Series: 15-20 HP Min.

- 925 lb., 1,150 lb., 2,040 lb. Capacity
- Pendulum-type
- Heavy-duty tubular frame
- 20-46 ft. Spreading width
- Additional size available for larger tractors



SEED BED ROLLER

SBR Series: 18-52 HP

- 72" Working width
- 11" Roller diameter
- Optional tongue, 2" ball hitch
- Transport tires on pull-type
- Optional Drag Harrow shown

DRAG HARROW

DRG Series: 8-16 HP

- 4', 6', & 8' Working widths
- 1/2" Tine diameter
- High carbon steel tine construction
- Shown here on Seed Bed Roller



606NT

COMPACT DRILLS

606NT Series: 40 HP Min.

- 6' Working width
- End wheel no-till
- Pull-type
- Hydraulic depth stop

706NT Series: 55 HP Min.

- 7' Working width
- End wheel no-till
- Pull-type
- 2 bu/ft Box capacity



ALL-PURPOSE SEEDERS

APS15 Series: 25-130 HP

- 48" Working width
- Rear spiked roller or 12" cast packer wheel roller
- #40 Chain with spring loaded idler
- Optional small seeds box
- Additional sizes available for larger tractors



MULTI-PURPOSE SEEDERS

MPS26: Cat. 2 or Pull-Type

- 7' Working width
- Available in 3-point or pull-type
- Regular and small seeds boxes standard
- Optional native grass box with walkboard
- Packer roller drive
- Spiked roller with adjustment handle
- Optional acremeter
- Additional sizes available for larger tractors

Visit landpride.com for specific HP requirements.



GRADING SCRAPERS

GS15 Series: 20-50 HP

- 48", 60", & 72" Working widths
- Heat-treated shanks
- 1/2" x 6" Cutting edges, reversible & replaceable
- Replaceable skid shoes
- Optional rear facing blade
- Additional sizes available for larger tractors

GS25 Series: 40-90 HP

- 72" & 84" Working widths
- 4" x 4" Front beam
- Heat-treated adjustable scarifier shanks
- Replaceable skid shoes
- Additional size available for larger tractors



GS15

TOP & TILT



Land Pride Top & Tilt Kits add versatility to your tractor 3-point. These popular kits can be used to easily adjust the top link fore and aft and with a 3-spool kit, operators can adjust a hydraulic accessory on an implement – raise and lower hydraulic shanks for example.





BOX SCRAPERS

BB12 Series: 17-30 HP

- 48", 54", & 60" Working widths
- 15" Moldboard
- Reversible & replaceable cutting edge
- Additional size available for larger tractors

BB15 Series: 17-40 HP

- 60", 66", & 72" Working widths
- 4 Position adjustable shanks
- 17" Roll-formed moldboard
- Reversible & replaceable cutting edge

BB25 Series: 25-55 HP

- 60", 66", 72", & 84" Working widths
- 4 Position adjustable shanks
- 17" Roll-formed moldboard
- Clevis type lower hitch

BB35 Series: 45-120 HP

- 78" & 84" Working widths
- Cat. 1 & 2 hitch
- Formed moldboard - 23" high
- Double strap lower hitches
- 4 Position shank
- Backfill blade standard
- Additional size available for larger tractors

HR25 Series: 30-60 HP

- 72" Working width
- 21" Roll-formed moldboard
- Rear backfill blade
- Hydraulic retractable shanks



BB12

Visit landpride.com for specific HP requirements.



DISC HARROWS

DH10 Series: Up to 40 HP

- 48" & 60" Working widths
- Notched or smooth discs
- 2" Square tube frame
- 7-1/2" Blade spacing
- Adjust gangs up to 21°

DH15 Series: Up to 65 HP

- 60", 72", & 90" Working widths
- 18" Notched or smooth discs
- Adjustable gang angles; 4 front, 3 rear
- 7-1/2" Blade spacing

DH35 Series: 45-100 HP

- 10' & 12' Working widths
- 7-1/2" or 9" Blade spacing
- Angle front & rear gangs up to 18°
- Notched or smooth discs
- 20" or 22" Discs

CORE AERATORS

CA15 Series

- 48", 56", 64", & 72" Working widths
- Cat. 0, 1, 1 Ltd.
- 1/2" Hardened steel spoon material
- 6" Spoon spacing
- Up to 4-1/2" spoon penetration
- Expanded metal weight tray



CA15

CA25 Series: Pull-Type

- 60" & 72" Working widths
- Cat. 1 hitch
- 5-1/2" & 6-1/2" Spoon spacing
- 4-1/2" Spoon penetration
- Optional water tanks for additional weight
- Storage stand on each corner for stability



RB37 (Shown on MX tractor)

REAR BLADES

RB15 Series: 17-40 HP

- 60", 72", & 84" Working widths
- Angle and offset capabilities
- 14" Moldboard with replaceable cutting edge
- Additional size available for larger tractors

RB16 Series: 20-40 HP

- 60", 72", & 84" Working widths
- Tilt, angle, and offset capabilities
- Optional hydraulic angling
- 14" Moldboard with replaceable cutting edge
- Additional size available for larger tractors

RB26 Series: 25-60 HP

- 72" & 84" Working widths
- Tilt, angle, and offset capabilities
- 17-1/2" Moldboard with replaceable cutting edge
- Additional size available for larger tractors

RB37 Series: 35-80 HP

- 72" & 84" Working widths
- Tilt, angle, and offset capabilities
- 5/16" Moldboard thickness
- Additional size available for larger tractors

RBT35 Series: 35-65 HP

- 84" Working width
- Manual or hydraulic adjustments
- 3" Moldboard kingpin
- Additional size available for larger tractors



RBT35

Visit landpride.com for specific HP requirements.



LR37

LANDSCAPE RAKES

LR16 Series: 20-40 HP

- 60" & 72" Working widths
- 1" High carbon spring steel teeth
- 7 Angle positions up to 45°
- Rear Blade adaptable
- Additional sizes available for larger tractors

LR26 Series: 25-60 HP

- 84" Working width
- 7 Forward angles
- High carbon spring steel teeth
- Additional size available for larger tractors

LR37 Series: 30-80 HP

- 84" Working width
- 5 Position angling up to 30°
- Rake offsets 26" left or right
- Rear Blade adaptable
- Additional size available for larger tractors



SA20

POST HOLE DIGGERS

PD10 Series: 15-30 HP

- 6", 9", and 12" Augers
- 30 HP Gearbox
- 2" Output shaft
- Available Down Pressure Kit

PD15 Series: 20-40 HP

- 6", 9", and 12" Augers
- 2" Output shaft
- Shear-pin protection
- 48" Auger length
- Available Down Pressure Kit

PD25 Series: 25-55 HP

- 6" - 24" Augers
- 2" Output shaft
- Cat. 3 Driveline with shear-pin or radial-pin protection
- Available Down Pressure Kit

PD35: 30-75 HP

- 6" - 24" Augers
- 2-7/8" Yoke tubing
- 2" Gearbox output shaft
- Cat. 3 Driveline with shear-pin or radial-pin protection
- Available Down Pressure Kit

HD25: 5-12 GPM

- Cat. 1 or 2, or bucket mount
- 2-7/8" Tubing
- 2" Output shaft
- 6" - 24" Augers
- Hydraulic drive

SA20 Series: 6-30 GPM

- Universal Quick-Attach
- Bucket mount option
- 6"-36" Auger sizes
- 24", 30" or 36" Tree auger
- 2" Output shaft





(Tips highlighted for illustration)

ROCK AUGERS

- 3.5" High strength tube
- 3/4" Double flight bore head
- Bullet-style carbide tips
- 1-3/4" Square shanked pilot
- 6", 9", 12", 15" & 18"
- 24" for SA20 only

Visit landpride.com for specific HP requirements.



RIPPER SHANKS

RS15 Series: 35-80 HP

- Cat. 1 & 2 3-point hitch
- Single ripper shank with shear-bolt protection
- 24" - 27" Ripping depth
- Parking stands



DITCHERS

DT55 Series: 60-150 HP

- 20" Impeller
- Optional control chute
- Lubricated chain drive
- Optional gauge wheel
- Optional ripper shank
- Optional skid shoe



QUICK-HITCHES

QH16 Series: Cat. 1

- 2,000 lb. Lifting capacity
- Automatic lock on lower 3-point arms
- Optional floating top link



ARENA GRADERS

AG15 Series: 18-65 HP

- 60", 72", & 84" Working widths
- 4" Working depth
- Adjustable leveling bar
- Adjustable rolling basket - mesh or pipe



SOIL PULVERIZERS

SP20 Series: 25-35 HP

- 60" & 72" Working widths
- Heat-treated replaceable sleeves on spikes
- 3/8" Steel shanks, reversible

SP30 Series: 30-50 HP

- 72" Working width
- Single steel spiked roller
- Heat-treated replaceable sleeves on spikes



FIELD CULTIVATORS

FC10 Series: Up to 45 HP

- 48" Working width adjustable to 57"
- Cat. 1 hitch
- Spring steel C-tines
- Replaceable tips

FC15 Series: Up to 50 HP

- 72" Working width
- Cat. 1 3-point hitch
- 4" Working depth
- 2 x 2 Square tubing frame
- Optional extensions create 96" working width (LP Exclusive)
- Available hitch to pull LP Drag Harrow

Visit landpride.com for specific HP requirements.



CLAW GRAPPLES

SGC06 Series Claw Grapple
- 60" Working width
- High tensile AR400 steel
- 32" Jaw opening
- Optional 3rd Function Valve

SGC10 Series Claw Grapple
- 60" & 72" Working widths
- High tensile AR400 steel
- 43-3/4" Jaw opening
- Optional 3rd Function Valve



COMBO BUCKETS

CB10 Series: Up to 65 HP
- 60" & 72" Widths
- 28" Max. jaw opening
- Lower jaw: Grade 80 steel
- 3/16" Side panels
- 1" Hinge points

ROOT GRAPPLES

RG10 Series: Up to 54 HP
- 60" & 72" Working widths
- A36 Tine material
- 27" Jaw opening
- Available 3rd Function Valve

RG15 Series: 50-100 HP
- 72" & 78" Working widths
- A36 Tine material
- 36.5" Jaw opening
- Available 3rd Function Valve
- Grand L only





3RD FUNCTION VALVES

Land Pride 3rd Function Valve accessory kits add versatility and value to your tractor and are available for select Kubota tractors.






WOOD CHIPPERS

WC1503 Series: 12-30 HP
- 3" Limb capacity
- 2 Hardened steel cutting knives
- 4-1/2" Rotor pulley diameter
- Adjustable support stands

WC1504 Series: 20-50 HP
- 4" Limb capacity
- 3/16" Main frame thickness
- Direct drive to motor
- 4 Hardened steel cutting knives
- Adjustable support stands

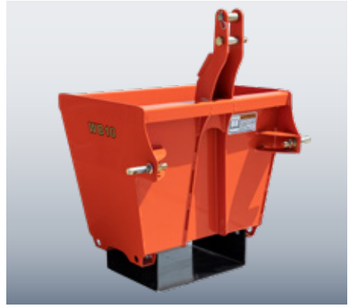

WEIGHT BOXES

WB10
- Cat. 1 Quick-Hitch compatible
- Shown with optional riser stand

WB15: 24-110 HP
- Cat. 1 & 2, 3-Point; Quick-Hitch compatible
- Up to 800 lb. weight capacity



STUMP GRINDERS

GR1525 Series: 25-55 HP
- 3-Pt. hitch, Cat. 1
- 24" Flywheel with carbide teeth
- 800-1100 rpm cutting wheel speed
- 10" Max. cutting depth
- 27" Swing distance
- Slip-clutch protected
- 1/2" Rotor thickness
- Sawtooth base for stability

Visit landpride.com for specific HP requirements.



BS10 & BSR10

BALE SPEARS

BS10

- 1,800 lb. Lift capacity
- Usable spear length: 45" Upper & 19" lower
- Universal Quick-Attach

BSR10

- 1,800 lb. Lift capacity
- 3-Point Cat. 1 or Cat. 2
- Spear length: 44" usable upper, 19" lower

BSR20

- 3-Point lift capacity at 24" from face of frame: 3,000 lb.
- Usable spear length: 44"
- Forged spear construction

BS20

- 2,500 lb. Lift capacity
- Usable spear length 45"
- Forged spear construction
- Universal Quick-Attach



BS20



BSR10



PFL30

PALLET FORKS

PF20 Series

- Bucket mounted
- 2,000 lb. Lift capacity
- 3" Tine width
- 2" Tine height

PFL20 Series

- Universal Quick-Attach or front loader plate
- 2,100 lb. Lift capacity
- 4" Tine width
- 1" Tine height

PFL30 Series

- Universal Quick-Attach or front loader plate
- 3,000 lb. Lift capacity
- 48" Tine length
- 1-1/4" Tine height



PF20



PFL20

Visit landpride.com for specific HP requirements.



SNOW BLOWERS

SB15 Series: 18-59 HP

- 74" Working width
- 24" Diameter impeller
- 16" Diameter auger
- 3-Pt, Rear facing

Inverted/Hybrid 15-55 HP

- 54", 64" and 74" Working widths
- 22" x 6" or 24" x 7" Impeller
- 3-Pt inverted design
- Optional hydraulic chute rotator

For all snowblower options, please see the Snow Solutions brochure on kubota.ca

SNOW TRIP BLADES

STB10 Series: 25-40 HP

- 60" & 72" Working widths
- 21" Curved pusher blade
- Dual trip springs for frame protection
- Hydraulic angle option available
- AR400 skid shoes

STB15 Series: 30-70 HP

- 72" & 84" Working widths
- Dual trip springs for frame protection
- 27" Curved pusher blade
- Hydraulic angle option available
- AR400 skid shoes
- Built in lateral oscillation
- Additional size available for larger tractors



SNOW PUSHERS

SPL10 Series: 20-45 HP

- 60", 72" or 84" Widths
- Universal Quick-Attach
- 24" Tall x 24" deep
- 10 ga. Moldboard with 1/4" sides
- Optional rubber or steel blade
- Optional pullback blade
- Replaceable AR400 skid shoes



PERFORMANCE MATCHED

This process ensures you that the horsepower, rating, weight, and width of your implement matches your tractor's exact specifications

PRODUCTS IN ACTION

See products in action, view product spins, and find full specs and manuals at **landpride.com**

LOCATE A DEALER

Find your closest dealer at **kubota.ca**

SHOPLANDPRIDE.COM

Find apparel, hats, cups, bags, bar stools, and more at **ShopLandPride.com**

Visit landpride.com for specific HP requirements.



A Division of Great Plains Mfg., Inc.
1525 E. North St. • P.O. Box 5060
Salina, Kansas 67401
Visit Kubota's Dealer Locator at kubota.ca

Revised by KCL
July 2026

Land Pride is a registered trademark of Great Plains Mfg., Inc.