




TILTROTATOR ATTACHMENTS

DITCHING BUCKETS

Entirely made of Hardox® 450 steel. Lighter and more durable than commercial steel.

Optimized bucket curvature with inverted ears. Easier to switch between attachments.

DITCHING BUCKETS					
Models	Height A <i>in. (mm)</i>	Width B <i>in. (mm)</i>	Weight <i>lbs (kg)</i>	Capacity <i>yd³</i>	Excavator Compatible
K0337DTR	19 (483)	42 (1067)	261 (119)	0.26	U48-5, U55-5, KX057-5
K0431DTR	22 (559)	54 (1372)	456 (207)	0.48	KX080-5


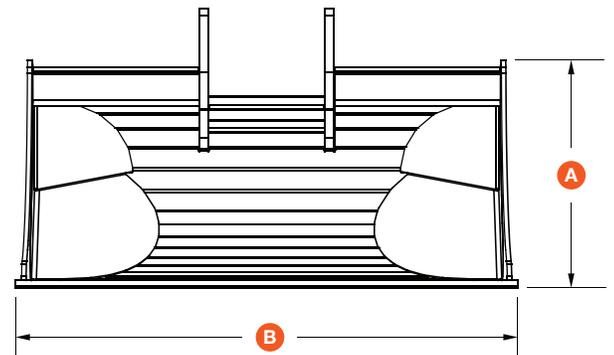


TRENCHING BUCKETS

Entirely made of Hardox® 450 steel. Stronger and more durable than regular steel.

Specifically designed for tiltrotator applications. Delivers greater precision and a superior finish.


TRENCHING BUCKETS					
Models	Height A <i>in. (mm)</i>	Width B <i>in. (mm)</i>	Weight <i>lbs (kg)</i>	Capacity <i>yd³</i>	Excavator Compatible
K0345TTR	24 (610)	18.8 (478)	232 (105)	0.18	U48-5, U55-5, KX057-5
K0347TTR	24 (610)	24.9 (632)	278 (126)	0.22	U48-5, U55-5, KX057-5
K0439TTR	26 (660)	24.2 (615)	401 (182)	0.26	KX080-5
K0441TTR	26 (660)	30.2 (767)	472 (214)	0.34	KX080-5

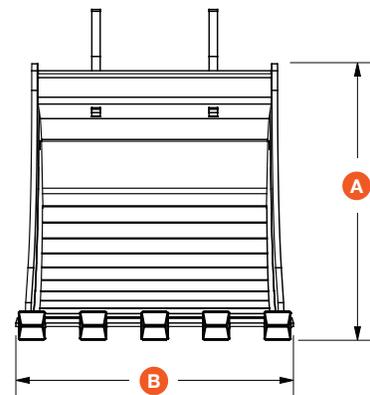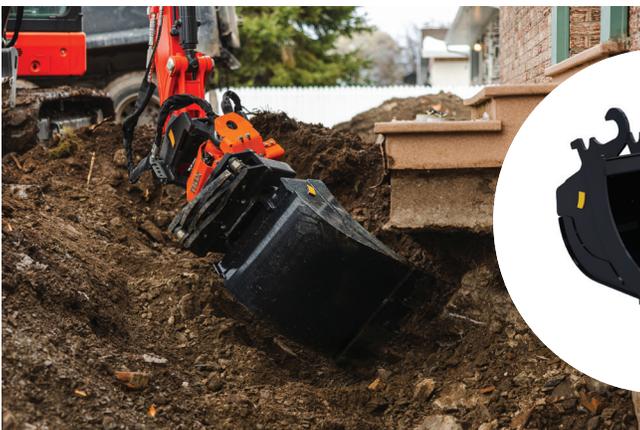

GRADING BEAMS

Faster, more efficient grading without the need to reposition the excavator. Designed for leveling dirt, gravel, soil and other materials into a smooth, even surface. The adjustable roller height allows operators to set the desired level for each task.

GRADING BEAMS					
Models	Height A <i>in. (mm)</i>	Width B <i>in. (mm)</i>	Roller Diameter C <i>in. (mm)</i>	Weight <i>lbs (kg)</i>	Excavator Compatible
K0352GB	15.6 (396)	72.8 (1849)	10.8 (274)	763 (346)	U48-5, U55-5, KX057-5
K0471GB	16.8 (427)	72.8 (1849)	10.8 (274)	780 (354)	KX080-5

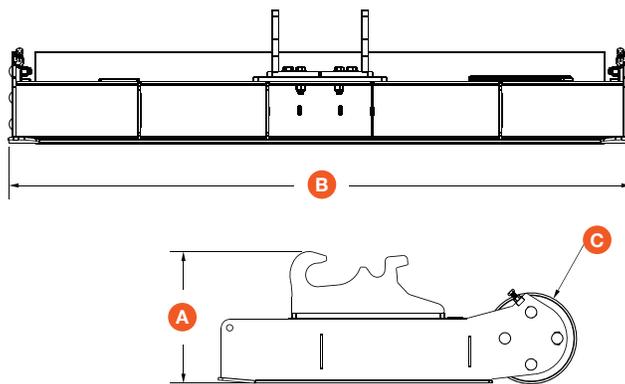


ASPHALT CUTTERS

Fully made of Hardox® 450 steel, delivering superior resistance and durability under high pressure.

Enhances jobsite precision and safety by isolating the repair area while protecting surrounding structures and obstacles.

ASPHALT CUTTERS				
Models	Height A <i>in. (mm)</i>	Cutter Diameter B <i>in. (mm)</i>	Weight <i>lbs (kg)</i>	Excavator Compatible
K0353AC	27.4 (696)	18 (457)	228 (103)	U48-5, U55-5, KX057-5
K0472AC	28.6 (726)	18 (457)	245 (111)	KX080-5

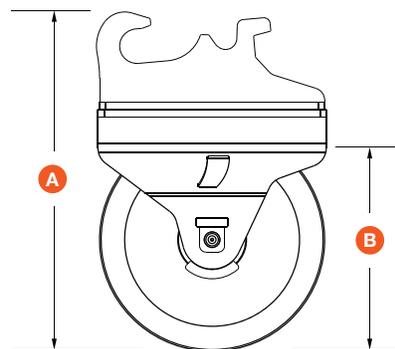



GRAPPLES

Three grapple models are available to match a wide range of applications, from heavy demolition to precise material handling:

- Construction grapples for demolition and heavy material handling.
- Multi-purpose grapples for handling logs, rocks and other bulky materials.
- Finger grapples for picking and placing smaller or more delicate items.



	CONSTRUCTION GRAPPLES		MULTI GRAPPLES		FINGER GRAPPLES	
Models	K0354CG	K0473GC	K0356MG	K0475MG	K0355FG	K0474FG
Height Open in. (mm) A	29.3 (744)	31.7 (805)	37.3 (947)	41.4 (1052)	35.6 (904)	39.9 (1013)
Height Closed in. (mm) B	32.7 (831)	38.5 (978)	30.2 (767)	33.5 (851)	30.2 (767)	33.5 (851)
Width Open in. (mm) C	46 (1168)	57.5 (1461)	60.1 (1527)	64.1 (1628)	60.4 (1534)	64.2 (1631)
Width Closed in. (mm) D	29.4 (747)	34.8 (884)	31.2 (792)	34.2 (867)	31.2 (792)	34.2 (867)
Width in. (mm) E	20.8 (528)	25.6 (650)	18.3 (465)	21.9 (556)	18.3 (464)	21.8 (553)
Weight lbs (kg)	453 (205)	692 (314)	474 (215)	737 (334)	485 (220)	769 (349)
Max Hyd. Pressure PSI	3000	3000	3000	3000	3000	3000
Excavator Compatible	U48-5 U55-5 KX057-5	KX080-5	U48-5 U55-5 KX057-5	KX080-5	U48-5 U55-5 KX057-5	KX080-5

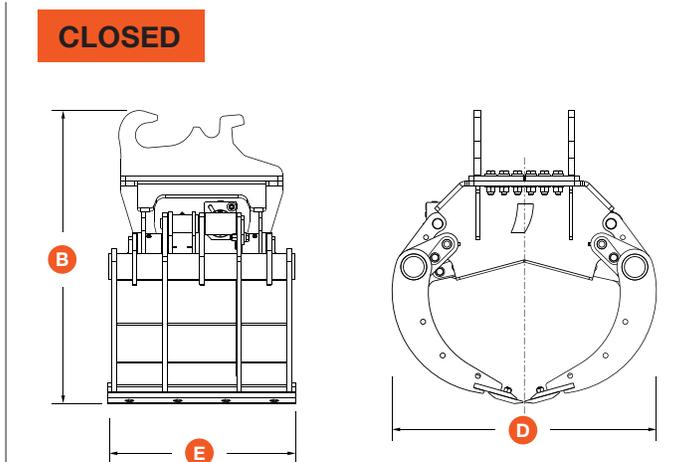
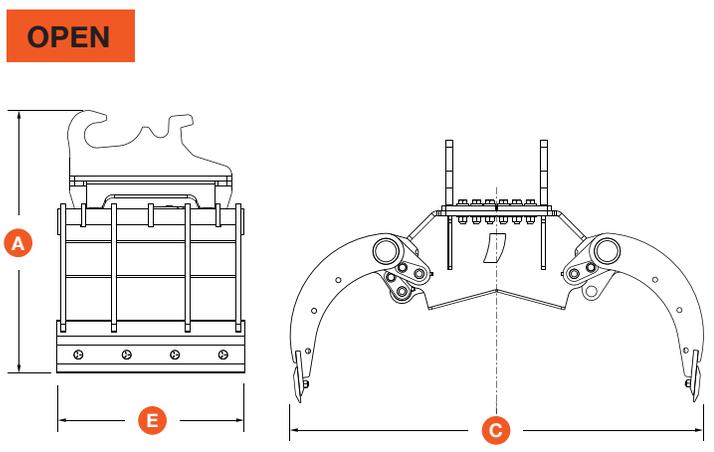


PALLET FORKS

Fork lifting capacity rated at 4,000 lbs.

The fork spacing is manually adjustable, with support hooks ensuring secure positioning for enhanced safety.

PALLET FORKS					
Models	Height A <i>in. (mm)</i>	Width B <i>in. (mm)</i>	Fork Length C <i>in. (mm)</i>	Weight <i>lbs (kg)</i>	Excavator Compatible
K0351PF	25.4 (645)	48.8 (1240)	48 (1219)	524 (238)	U48-5, U55-5, KX057-5
K0470PF	26.6 (675)	48.8 (1240)	48 (1219)	541 (245)	KX080-5

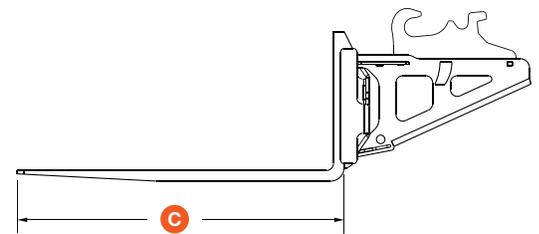
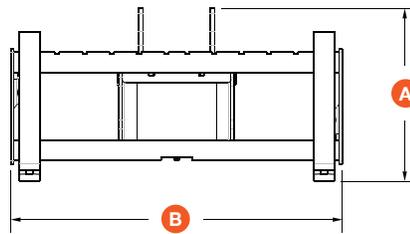


HYDRAULIC PALLET FORKS

Fork lifting capacity rated at 4,000 lbs.

Hydraulically adjustable fork spacing, increasing versatility by eliminating the need to leave the cab.

HYDRAULIC PALLET FORKS					
Models	Height A <i>in. (mm)</i>	Width B <i>in. (mm)</i>	Fork Length C <i>in. (mm)</i>	Weight <i>lbs (kg)</i>	Excavator Compatible
K0351HPF	25.4 (645)	48.8 (1240)	48 (1219)	759 (344)	U48-5, U55-5, KX057-5
K0470HPF	26.6 (675)	48.8 (1240)	48 (1219)	776 (352)	KX080-5

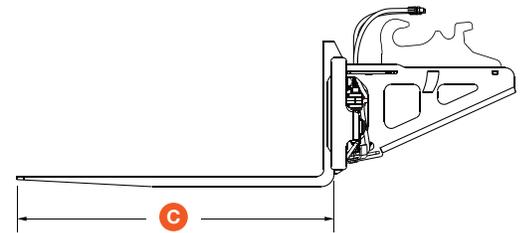
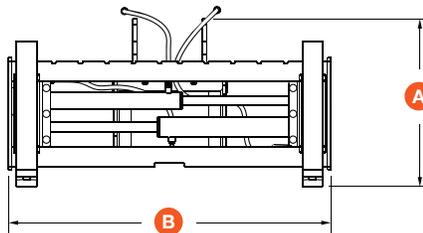


BROOMS

Designed to clean a wide variety of materials, including sand, rocks, snow and mud. The brushes are made of ultra-durable nylon to sweep all surfaces.

Deliver a clean, professional result on every job site.

BROOMS				
Models	Height A <i>in. (mm)</i>	Width B <i>in. (mm)</i>	Weight <i>lbs (kg)</i>	Excavator Compatible
K0357BR	22.8 (579)	62 (1575)	517 (235)	U48-5, U55-5, KX057-5
K0476BR	24.5 (622)	73.5 (1867)	607 (275)	KX080-5

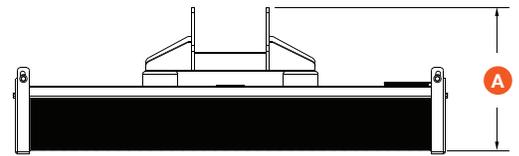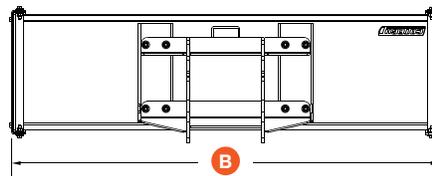

SMARTER WORK. MORE ANGLES.



KUBOTA.CA

Kubota Canada Ltd. reserves the right to change the stated specifications without notice. The comparison is for descriptive purposes only and does not provide any express or implied warranty of any nature, including any warranty of merchantability or for a particular purpose. For complete operational information, the operator's manual should be consulted. KCL supplies products and services to Canadian residents only. For information regarding Kubota products or services outside Canada, see Kubota Corporation's global website.

PART: CE-TILTROTATORATTATTENG