


# SPECIFICATIONS

Model		KX040-4		KX040-4 Angle Blade	KX040-4 6-in-1 Blade
Type of ROPS / OPG (TOP Guard, Level I)*		Canopy / Cab			
Type of tracks		Rubber / Steel			
Engine	Model		Kubota D1803-CR-TE4		
	Output (SAE J1995 gross)	HP (kW) / rpm	40.4 (30.1) / 2200		
	Output (SAE J1349 net)	HP (kW) / rpm	38.9 (29.0) / 2200		
	Displacement	cu. in. (cc)	111.4 (1826)		
Dimensions	Overall length	ft. in. (mm)	16'8.1" (5085)		
	Overall height	Canopy / Cab	ft. in. (mm) 8'1.8" (2485) / 8'1.8" (2485)		
	Overall width	ft. in. (mm)	5'6.9" (1700)	5'10.9" (1800)	
	Min. ground clearance	in. (mm)	12.99" (330)		
Hydraulic system	Pump capacity	GPM (ℓ/min)	24.4 (92.4)		
	Auxiliary hydraulic flow	GPM (ℓ/min)	17.2 (65)		
	Max. breakout force	Bucket / Arm	lb. (kgf) 9535 (4325) / 4112 (1865)		
Drive system	Travel speed	Low / High	mph (km/h) 1.8 (2.9) / 3.1 (5.0)		
	Max. traction force	Low speed	lb. (kgf) 9747 (4420)		
	Tumbler distance	ft. in. (mm)	5'7.3" (1710)		
	Crawler length	ft. in. (mm)	7'1.6" (2175)		
	Shoe width	ft. in. (mm)	1'1.8" (350)		
	Ground contact pressure	Rubber Canopy / Cab	psi (kPa)	4.53 (31.2) / 4.68 (32.3)	4.70 (32.4) / 4.86 (33.5)
Swing system	Unit swing speed	rpm	9.2		
	Boom swing angle	Left / Right	degree 70 / 55		
Blade	Dimensions	Width	ft. in. (mm) 5'6.9" (1700)		5'10.9" (1800)
		Height	ft. in. (mm) 1'1.8" (350)		1'3.2" (385)
	Max. lift above ground	ft. in. (mm) 1'3.7" (400)		1'4.5" (420)	1'4.9" (430)
	Max. drop below ground	ft. in. (mm) 1'3.9" (405)		1'8.1" (510)	1'8.9" (530)
	Angle	Left / Right	degree -		25 / 25
Tilt		degree -		10 / 10	
Hydraulic oil (Reservoir / System)		gal (ℓ)		11.1 (42) / 19.6 (74)	
Fuel reservoir		gal (ℓ)		16.9 (64)	
Operating weight (Including operator's weight @ 165 lbs.)	Rubber Canopy / Cab	lbs. (kg)	9195 (4170) / 9500 (4310)	9545 (4330) / 9855 (4470)	9900 (4490) / 10210 (4630)
	Steel Canopy / Cab	lbs. (kg)	9350 (4240) / 9655 (4380)	9700 (4400) / 10010 (4540)	10055 (4560) / 10360 (4700)

## DIMENSIONS

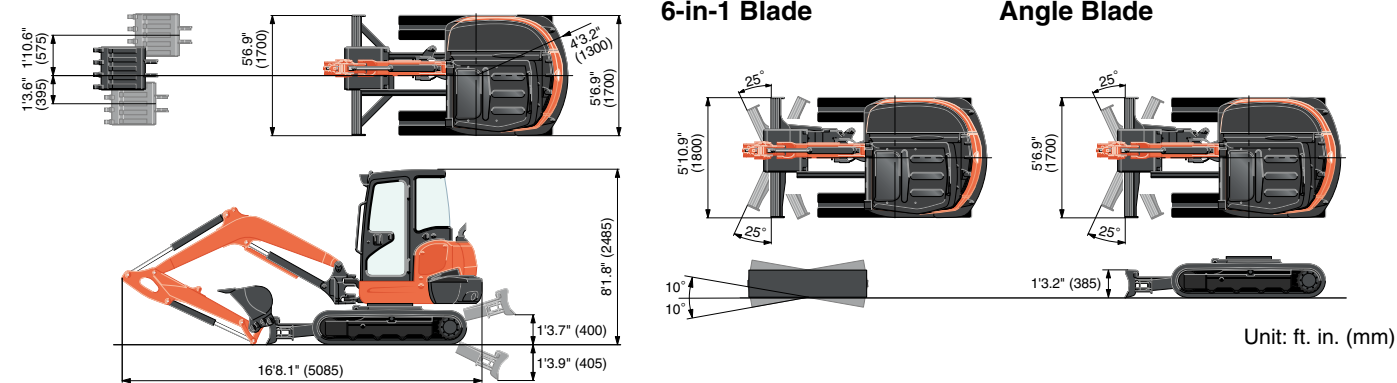

Kubota Canada Ltd. reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for Canada only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

©2022 Kubota Corporation



**Kubota  
Genuine Parts**  
for maximum  
performance,  
durability and  
safety



# Kubota

**KUBOTA CANADA LTD.**

Head Office:  
1155 Kubota Drive, Pickering, Ontario L1X 0H4, Canada  
TEL: (905) 294-7477

Visit our web site at: [www.kubota.ca](http://www.kubota.ca)

Cat. No.8885C-01-CL Printed in Japan '22-03D. <img alt="Kubota logo" data-bbox="445 970 455 980"/> 2.9



For Earth, For Life  
**Kubota**

# KX

## KUBOTA COMPACT EXCAVATOR KX040-4

The superior compact excavator that combines exceptional strength and versatility with performance and user-friendly operation.



Superior 4-ton muscle and clean engine performance make the KX040-4 the ideal choice for a demanding world.

# CLEAN AND POWERFUL EXCAVATOR

## Common Rail System and Diesel Particulate Filter (DPF) muffler

The Common Rail System (CRS) electronically controls the fuel injection timing and amount in stages rather than all at once for optimal combustion. The results are greater efficiency, better fuel economy and less engine noise. Its combination with the Exhaust Gas Recirculation (EGR) and Diesel Particulate Filter (DPF) Muffler reduces harmful emissions to make the KX040-4 engine Tier IV certified.

## Automatic regeneration system

Kubota's original automatic regeneration system automatically burns accumulated particulate matter (soot) in the DPF muffler to keep the muffler clean for longer operation. For safety reasons, automatic regeneration can be turned off with the inhibit switch when the excavator is operating in areas that may pose a fire hazard.



## Introducing ECO PLUS<sup>®</sup>


Kubota's original ECO PLUS prioritizes fuel economy, and supports the environment.

For tough digging applications, use Standard Mode and experience a 3% productivity improvement over the prior model and use less fuel, up to 12% less.

Activate Eco Mode with the flick of a switch for up to 9% fuel savings over Standard Mode.



Eco Mode Switch



Eco Mode Indicator


### STANDARD MODE

- Improved Productivity • Lower Fuel Consumption
- Compared to Prior Model*



### ECO MODE

- Focus on Lower Fuel Consumption
- \*Compared to Standard Mode*



# DELUXE INTERIOR

The KX040-4 raises the standard in 4-ton excavator comfort with a spacious cab that rivals 5-ton excavators. The luxurious cab features a wider entrance, greater legroom and a deluxe seat. Operation is greatly enhanced with more easy-to-use features than ever before.

## New spacious cab

Designed for greater comfort, the new large cab with a fully flat floor provides more legroom to minimise fatigue.

## Easy-open front side window

Unlike many excavator windows, the front glass window of the KX040-4 opens with ease. Just flip the latches on the window sides and slide it up. A gas-assist mechanism makes this action almost effortless.



## Wider entrance

The KX040-4's larger cab provides a much wider door and more ample foot space, to make getting on and off the excavator a breeze.



## Fully flat floor

For added comfort, the cabin floor is completely flat for more spacious leg and footroom.



## A. Deluxe suspension seat

Designed and engineered to fit better and to keep you working longer comfortably, Kubota's high-back suspension seat reduces strain and minimizes operator fatigue. It reclines to accommodate your individual posture, and offers weight compensation, firm and adjustable wrist support and retractable seat belts.

## B. 2-speed travel switch

By placing the 2-speed travel switch on the dozer lever, dozing operations can be done faster and easier.



## C. Cup holder

With the convenience of a bigger cup holder, you can quench your thirst and work longer without leaving the cab. Or store your cell phone. The charging port is located conveniently close by.

## D. Wrist rest

A thoughtfully designed wrist rest enhances operation and reduces operator fatigue.

## E. Air conditioning

The overall air circulation in the cab has been improved, thanks to a stronger cooling/heating unit and the positioning of six vents around the operator to offer better all-round comfort.



# SUPERIOR PERFORMANCE



## Hydraulic 6-in-1 Blade Models

Kubota's hydraulic 6-in-1 Blade can be angled right and left, and now, tilted as well. This blade enables six different positions: neutral, float-up, left-end-up, right-end-up, left-end-forward and right-end-forward. This feature makes leveling and backfilling work incredibly easy, even on inclines and uneven terrain, making you more productive and more efficient.

### Tilt blade control

The 6-in-1 blade is a true productivity enhancer, and operation is now even more rewarding. Blade up, down, and float functions are the same as the previous model. Operate the rocker switch on top of the blade control to tilt the blade 10° up or down, and simply twist the control handle to angle the blade 25° left or right. Command all six functions simultaneously for more convenient control of landscaping, shaping, and backfilling jobs.



### Proportional flow control of auxiliary circuit and maximum oil flow setting

The KX040-4 is available with a standard auxiliary circuit. The convenient thumb-operated switch on the lever allows easy proportional flow control of the auxiliary attachment, while a forefinger-operated on/off switch enables simple operation of attachments that require a constant oil flow. The maximum oil flow setting is conveniently adjustable from the digital panel. Up to five flow rates corresponding to specific attachments can be programmed in the memory on the digital panel for easy retrieval for the next job.



### AUX1 diverter valve

With the diverter valve on the auxiliary hydraulic circuit, the hydraulic oil can be switched to a second attachment, without having to disconnect the main attachment.



### Third line hydraulic return

When working with one-way hydraulic attachments, such as a breaker or brush cutter, the standard third-line hydraulic return system allows oil to flow directly back to the tank without running through the control valves. This contributes to less oil contamination, reduced back pressure, and greater oil flow efficiency.



### Strong bucket breakout


Even when heavily loaded, the KX040-4 won't slow down, thanks to its powerful breakout force. The bucket breakout force is more than enough for even the toughest excavating jobs.

### Thumb bracket and relief valves

The factory installed thumb mounting bracket and hydraulics reduce mounting time, and improve safety, when using hydraulic attachments.

### Superior width and tilt angle

This 5' 10.9"-wide blade stretches across the entire machine width, even when tilted. It can be tilted a generous 10 degrees right or left, allowing the operator to dig ditches easily when tilted on a flat surface.

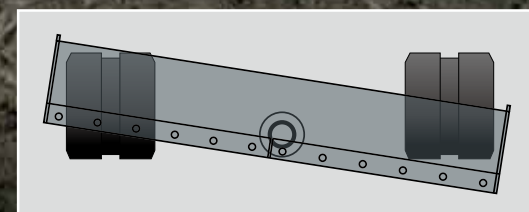

### Bolt-On cutting Edge (BOE)

The cutting edge protects the angle blade during heavy-duty dozing operations. The reversible cutting edge is divided into two sections to easily invert the edge for continued use.

### Tie-down/lift points

The dozer blade's thick side plates improve the tie-down point's durability. Use them also as lifting points, along with the lifting point on top of the boom, for convenient 3-point crane lifting of the KX040-4.



## Angle Blade Models


Save time and work more efficiently. With a simple movement of the blade lever, the hydraulic angle blade can be angled to the right or left to push soil to the side as the machine moves forward, eliminating the need for repetitive repositioning at right angles when backfilling trenches.

### Angle Blade control


Simply operate the rocker switch on the top of the blade lever to angle the blade up to 25° left or right. Work more efficiently and save time pushing soil to the side as the machine moves forward. After backfilling, just travel backward along the covered trench with the dozer in the float position for a beautiful finish!



## What makes our Angle Blade excavator so productive? Check it out.

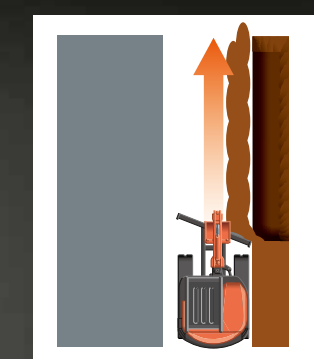

**With Angle Blade**  
Moving only in a forward direction one time, which is equivalent to a trencher backfilling its one side, the KX040-4 Angle Blade excavator backfills smoothly and efficiently.

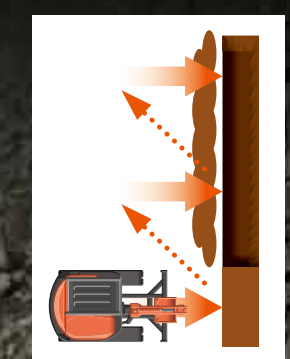

**Without Angle Blade**  
Without the angle blade feature, time-consuming, repetitive repositioning at right angles to the trench is required.

### Float position

The float function is a standard feature on the KX040-4. Ground finishing work can be completed quickly and simply without the need to adjust the dozer height. After backfilling, simply travel backwards along the covered ditch with the dozer in the float position.



### Fully locked hydraulic system

An Engine Start Lockout System prevents the engine from starting when the safety levers are lowered. A Safety Lever Lockout System helps prevent unexpected excavator and attachment movement when entering or exiting the machine. An Auto House Parking Brake automatically locks the house in the position it was in when the engine was shut off, eliminating the need for a swing lock pin. It also makes the excavator more compact during transport and more secure when parked on an incline.



### TPSS

The Two-Pattern Selection System positioned under the seat allows the operator to shift control styles conveniently while seated. A simple turn of a switch is all it takes to select between the ISO pattern and the SAE backhoe pattern.

The KX040-4 has the power and versatility to take on almost any task even in the toughest conditions. Combined with improved digging and lifting power, and smoother travel performance, it can get the job done right!

**ROPS/OPG (TOP Guard, Level 1) canopy and cabin**

The OSHA-certified ROPS/OPG (TOP Guard, Level 1) canopy and cabin provide protection in the event of accidental rollovers and falling objects.



**Auto idling system**

Save fuel with Kubota's Auto Idle. When the control levers are in neutral for more than 4 seconds, the engine RPM automatically idles. Move any control lever and the engine RPM immediately returns. This innovative feature reduces noise and exhaust emissions while reducing operating costs.

**Auto down shift**

The auto down shift system enables automatic travel shift from high to low depending on traction effort and terrain. This gives smoother simultaneous operations when dozing and turning.



**One-sided Engine Maintenance**

Kubota makes it easier for you to keep the KX040-4 in tip-top condition. Primary engine components are located on one side for easy access, inspection and maintenance.



- A. DPF Muffler
- B. Fuel Filter
- C. Water Separator
- D. Alternator
- E. Starter Motor



**Accumulator**

The accumulator makes connecting/disconnecting attachments safer and more efficient. Turning the key to the "on" position clears residual pressure in the auxiliary hydraulic hose. Additionally, if the engine is accidentally shut off while the front attachment is raised, turning the key to the "on" position allows you to safely lower it.

**Two-piece hose design**

The two-piece hose connections for the dozer cylinder simplify hose replacement and reduce downtime.

**Protected cylinder hoses**

The bucket cylinder hoses are located inside the arm, and the boom cylinder hoses are routed under the boom bottom.

**Centralized swivel bearing lubrication**

Grease ports for the swivel bearing, gear teeth, and swing cylinder pin are conveniently grouped on the front of the house.

**Front pin bushings**


To maximize durability, we've introduced bushings on all of the pivot points on the front attachment and connecting points on the swing bracket.



**MAINTENANCE**

Although your Kubota excavator is state-of-the-art, its maintenance doesn't get much easier. Thanks to the full-opening rear and right side hoods, engine, control valves and various components are accessible for easy inspection and repair.


# NEW DIGITAL PANEL

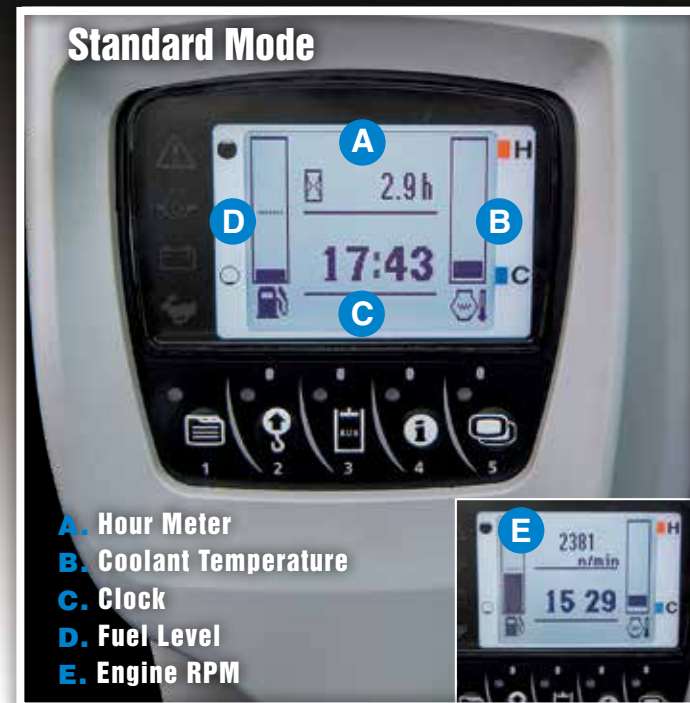

Following the success of Kubota's Intelligent Control System, the new digital panel puts convenience at the operator's fingertips. Featuring easier button operation, the user-friendly digital panel is positioned to the front right corner of the operator for improved visibility. With easier access, simpler settings, easy-to-read indicators and alerts, you'll always be aware of the excavator's functioning status.


## Operation History Record

Operation history is automatically recorded on the KX040-4. You can trace back up to 90 days of the machine's usage dates by simply checking the built-in calendar.



## Automatic regeneration mode

The automatic regeneration system automatically burns particulate matter (soot) that accumulates in the diesel particulate filter (DPF) muffler. The soot is burned when the engine is operating at sufficient engine speed for regeneration. If the engine speed is lower than the required level for regeneration, the indicator requests an increase in the engine speed to keep the accumulation level low and the DPF clean. A service call or DPF filter replacement is required when the accumulated soot reaches a level that reduces the engine speed.

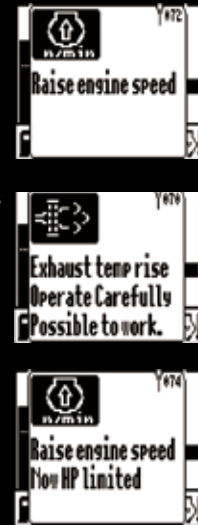

Service Mode



Warning Mode



Operation History Record



Max. Oil Flow Setting

## Kubota Original Anti-theft System

Your KX040-4 is protected by Kubota's industry-leading anti-theft system. Only programmed keys will enable the engine to start up. Attempting to start with an un-programmed key will activate the alarm. Newly enhanced features include an alert to remind the operator to extract the key after operation, and an LED to alert potential thieves that the system is activated.



The red programming key programs the individual keys. The individual black keys start the engine.

# KX040-4 OPTIONS

## STANDARD EQUIPMENT

### Safety system

- Engine start safety system
- Travel motor with disc brake
- Swivel motor with disc brake
- Kubota original anti-theft system
- All hydraulic control

### Working equipment

- Auxiliary hydraulic circuit w/diverter valve
- 2 working lights on cab and 1 light on the boom
- Dozer blade with float function
- Thumb bracket and relief valve

### Operator's space

- ROPS / OPG (TOP Guard, Level I) canopy
- Weight-adjustable full suspension seat
- Retractable seat belt
- Hydraulic pilot control levers with wrist rests
- Travel levers with foot pedals
- Two pattern selection system
- Digital panel
- 12V power source
- Cup holder
- Horn

### Engine/Fuel system

- Double element air filter
- Auto idling system
- Water separator with drain cock

### Undercarriage

- 350 mm rubber track
- 1 x upper track roller
- 4 double-flange track rollers on each side
- 2-speed travel switch on dozer lever
- 2-speed travel with auto down-shift

### Hydraulic system

- 1-pump load sensing system
- Pressure accumulator
- Hydraulic pressure checking ports
- Straight travel circuit
- Third line hydraulic return
- Auxiliary switch
- Adjustable maximum oil flow on auxiliary hydraulic circuit

### Others


- Tool box
- Grease gun holder

## OPTIONAL EQUIPMENT

- 6 in 1 blade with float function and BOE
- Angle blade with float function and BOE
- Cab with A/C
- Canopy lights
- Beacon lights
- 350 mm steel track
- Travel alarm

## WORKING RANGE

Model		KX040-4	
A	Max. digging height	ft. in. (mm)	17'6" (5335)
B	Max. dumping height	ft. in. (mm)	12'9.5" (3900)
C	Max. digging depth	ft. in. (mm)	11'2.7" (3420)
D	Max. vertical digging depth	ft. in. (mm)	7'4.8" (2255)
E	Max. digging radius, at ground level	ft. in. (mm)	17'9" (5410)
F	Max. digging radius	ft. in. (mm)	18'2.1" (5540)
G	Min. turning radius	W/o swing	ft. in. (mm) 7'1.8" (2180)
		W swing	ft. in. (mm) 5'11.1" (1805)
H	Min. tail turning radius	ft. in. (mm)	4'3.2" (1300)

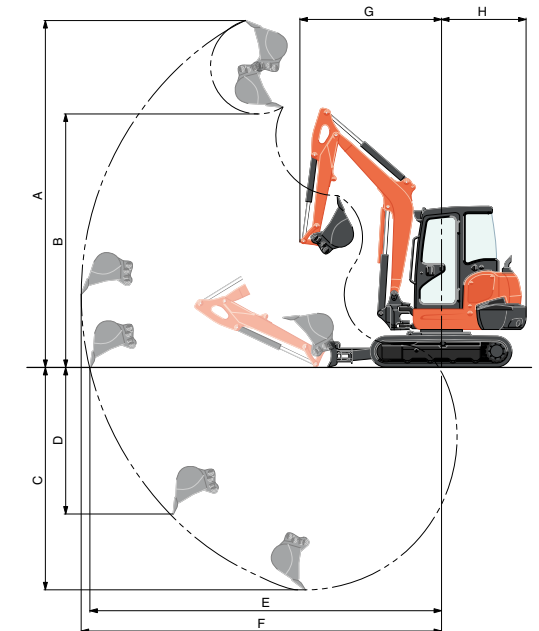

## LIFTING CAPACITY

Cab rubber

LIFT POINT HEIGHT (ft)	LIFTING CAPACITY OVER-FRONT BLADE DOWN unit=1000 lbs			LIFTING CAPACITY OVER-SIDE unit=1000 lbs		
	LIFT POINT RADIUS (ft)			LIFT POINT RADIUS (ft)		
	8	12	14	8	12	14
6	2.72	1.91	1.75	2.72	1.60	1.27
4	3.54	2.13	1.86	2.76	1.55	1.25
2	4.08	2.32	1.96	2.65	1.51	1.22
GL	0	4.25	2.43	2.60	1.48	1.21

Machine with cab and rubber crawler, without bucket, with standard blade

