


TM-S9000II Multifunction Device

Multifunction Device

POS

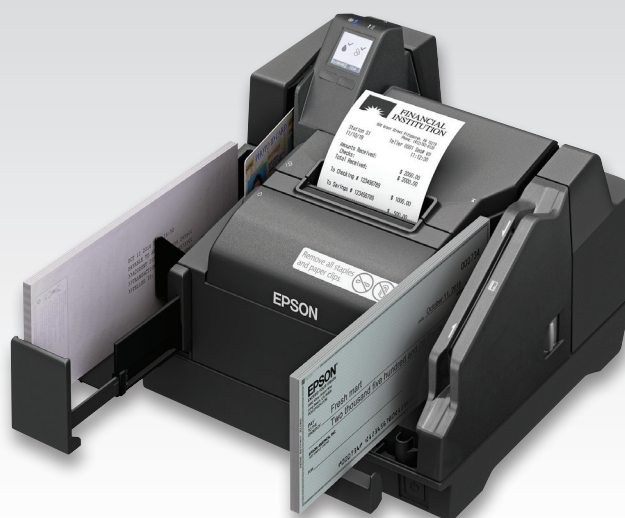

Full-featured device with check scanner and built-in thermal printer.

The only multifunction device with an integrated thermal printer — supports check scanning, ID card scanning and inkjet printing; features an MSR, plus receipt printing with paper-saving features

LCD status updates — quick, easy access to function or maintenance status

Best warranty in its class — dedicated technical resource team; customized solutions; 2-year limited warranty

Fastest scan speeds in its class — scans up to 225 dpm

Built-in inkjet printer — up to 16 lines of printing for cashier's checks, slip sheets, endorsements and marketing graphics

2-sided ID scanning — easily capture color ID cards

Powerful productivity — 100-check document feeder

Thermal Printer

Print Method Direct thermal
Print Speed Up to 300 mm/sec (11.8"/sec)
Print Resolution 180 x 180 dpi
Print Font Font A (default): 12 x 24/Font B: 9 x 17
Paper Size Roll paper diameter: 83 mm (3.27") maximum
Paper Width 79.5 ± 0.5 mm (3.13" ± 0.02")
Reliability
 MTBF: 360,000 hours
 MCBF: 96,000,000 lines
 Auto Cutter: 2 million cuts

Line Inkjet Printer

Print Method Line ink, 360 nozzles
Print Resolution 180 x 180 dpi
Print Font Font A (default): 12 x 24/Font B: 9 x 17
Reliability MTBF 180,000 hours
Head Life 6 billion shots/nozzle¹

Document Scanner

Throughput Up to 130, up to 225 dpm (documents per minute)
Speed Paper feeding: up to 1,000 mm/sec
Area 106 x 235 mm
Resolution 100 dpi, 120 dpi, 200 dpi, 240 dpi interpolated, 300 dpi optical
Method CIS (Contact Image Sensor)
Mode 24-bit color, 8-bit grayscale, bi-tonal
Capacity Auto-input feeder of 100 items; exit pocket of 100 items; optional second pocket of 50 items
MICR E13B and CMC7
Data Compression CCITT Group 4, JPEG
Data Transmission Format TIFF, JPEG, JTIFF, BMP (Windows® bitmap), Raster (Raw)
OCR OCR-A, OCR-B and 1D Barcode
Rated Life 2 million items
MCBF 4,940,000 cycles
MTBF 180,000 hours
D.K.D. 2 drawers

ID Card Scanner

Throughput 1 at a time; multiple feeding is not available
Speed Card feeding: 118 mm/sec (600 dpi color)
Area ISO/IEC 7810 card
Resolution 200 dpi interpolated, 300 dpi, 600 dpi optical
Method CIS (Contact Image Sensor)
Mode 24-bit Color, 8-bit Grayscale
Capacity 1 ID

Operating Systems

Windows 10, Windows 8/8.1, Windows 7, Windows Vista®, Windows XP, Windows XP Embedded, Windows Embedded POSReady 2009, Windows Embedded Standard 7, Windows Embedded POSReady 7, Windows Server® 2008/2008R2, Windows Server 2012/2012R2, Windows Server 2016

General Information

Factory Options MSR 3 tracks (ISO 7811-6 and AAMVA), HID Keyboard interface; USB hub 2 ports, USB specification 2.0
Second Pocket Maximum of 50 items
Single-pocket Size 206 x 263.8 x 250 mm (H x D x W) [8.11" x 10.39" x 9.84"]
Two-pocket Size 177 x 298.8 x 275 mm (H x D x W) [6.97" x 11.76" x 10.83"]
Power PS-180, 24 VDC; there is only one power supply for the scanner and printer
Weight
 One-pocket model: 5.3 kg (11.68 lb)
 Two-pocket model: 5.7 kg (12.57 lb)
Case Color Epson® Black
Environmental Standards WEEE, RoHS compliant
Warranty 2-year limited warranty
Country of Origin China

Packaging Specifications

Single Box Dimensions (L x W x H)
 15.75" x 14.2" x 11.4"/400 x 360 x 290 (mm)

What's in the Box

TM-S9000II, thermal roll paper (starter roll for operation check), USB cable, dedicated ink cartridge [SJIC18(K)] x 2, AC cable, AC adapter [PS-180 (Model: M159B)], Setup Guide, cut-sheet paper (starter cut-sheet paper for operation check)

Eco Features

RoHS compliant
 Recyclable product²
 Epson America, Inc. is a SmartWay® Transport Partner³

Ordering Information⁴

Scanner, 130, Single Pocket, USB Hub, MSR	A41CG59021
Scanner, 130, Single Pocket	A41CG59031
Scanner, 225, Dual Pockets, USB Hub, MSR	A41CG59101
Scanner, 225, Single Pocket, USB Hub, MSR	A41CG59121

⚠ WARNING: The paper roll shipped together with this product can expose you to chemicals, including Bisphenol A and Bisphenol S, which are known to the State of California to cause birth defects or other reproductive harm.
Wash hands after handling.

For more information, go to www.P65Warnings.ca.gov

¹ Shots are the number of electric pulses for the printhead. | ² For convenient and reasonable recycling options, visit www.epson.com/recycle | ³ SmartWay is an innovative partnership of the U.S. Environmental Protection Agency that reduces greenhouse gases and other air pollutants and improves fuel efficiency. | ⁴ Contact your Epson representative for additional models.

See the latest innovations from Epson Business Solutions at www.epson.com/forbusiness

Better Products for a Better Future™
eco.epson.com



Epson America, Inc.
 3131 Katella Ave., Los Alamitos, CA 90720

Epson Canada Limited
 185 Renfrew Drive, Markham, Ontario L3R 6G3

www.epson.com
www.epson.ca

Specifications and terms are subject to change without notice. EPSON is a registered trademark and Better Products for a Better Future is a trademark of Seiko Epson Corporation. Windows, Windows Server and Windows Vista are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. SmartWay is a registered trademark of the U.S. Environmental Protection Agency. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks.
 Copyright 2019 Epson America, Inc. Com-SS-Oct-13 CPD-55281R3 10/24

Contact: