serif index

BERNHARDT design

index	2
laminate selections	3
veneer selections	4-5
design selection + powder coat finishes	5
overview + configuration options	6
base design + storage	7
modesty panel + ganging brackets	8
grommet location + data management	9
power management	10
surface mount overview	11
dual under mount overview	12
configurations + power	13

edge mount base							
standard + communcation grommet	14_						
surface mount power	15						
surface mount - daisy chained power	16						
dual under mount - daisy chained power	17						
inset mount base							
standard + communcation grommet	18						
surface mount power	19						
surface mount - daisy chained power	20						
dual under mount - daisy chained power	21						
accessories							
corner top	22						
_modesty panels	23						
power							
under mount power options	24						
wire management	25-26						
extron® AAP modules	27-28						
terms and conditions	29-31						
guaranteed freight 32							
guaranteed freight - canada							



Laminate Selections

A three character sku identifies each laminate selection as well as the standard finish offered. Individual components are priced with standard finish on standard laminate.

A variety of Wilsonart® standard laminates with standard finishes is offered on conference and multipurpose tables. Additional colors may be available but are

subject to upcharges and extended lead times. The laminate option is available on components where noted as an option in the material specification code.

All laminate tops will have a 3mm matching edge band.

PLL Solid Laminate

Standard Solid

Designer White, Wilsonart D354-60 Matte Finish
 Frosty White, Wilsonart 1573-60 Matte Finish
 Fashion Grey, Wilsonart D381-60 Matte Finish
 North Sea, Wilsonart D90-60 Matte Finish

Black, Wilsonart 1595-60 Matte Finish

20% Upcharge

675

671

Snow White Velvet, Wilsonart 15501-31 Traceless Laminate
 Charcoal Velvet, Wilsonart 15504-31 Traceless Laminate
 Black Velvet, Wilsonart 15505-31 Traceless Laminate



WGL Woodgrain Laminate

672

Standard Woodgrain

684	Phantom Pearl, Wilsonart 8211K-28 Gloss Line Finish w/Aeon Scratch Resistant Protection
685	Raw Chestnut, Wilsonart 7975K-12 Soft Grain Finish w/Aeon Scratch Resistant Protection
686	High Line, Wilsonart 7970K-18 Linearity Finish w/Aeon Scratch Resistant Protection
678	New Age Oak, Wilsonart 7938-16 Casual Rustic Finish
679	Brazilwood, Wilsonart 7946-38 Matte Finish
687	Boardwalk Oak, Wilsonart 7983-38 Fine Velvet Finish
683	Portico Teak (Grey), Wilsonart 8210K-28 Gloss Line Finish
681	Studio Teak, Wilsonart 7960-16 Casual Rustic Finish
680	Walnut Heights, Wilsonart 7965K-12 Soft Grain Finish
682	Asian Night, Wilsonart 7949-16 Casual Rustic Finish





















Veneer Selections

A three character sku identifies each species as well as the standard finish offered. Individual components are priced with standard finish. Special finishes on veneers made to customer specifications are subject to factory approval and a 10% net upcharge with a \$500 net minimum.

Transparent stains and sealers are applied in multiple steps to enhance the beauty of the natural wood. A durable, baked-on, top-coat of conversion varnish or UV topcoat is applied to protect the product. It is recommended that felt, cork or fabric backed desk pads and accessories are used on worksurfaces to minimize wear.

When specifying light finishes the natural characteristics of the wood will be visible and color will vary. Paint finishes are available as custom orders. See terms and conditions for additional finish information.

MPL Maple Flat Cut



871 860 861 837 836 823 865 805

Standard Finish 866 872 839 845

OAK Oak



Standard Finish 871 870 839 837 860 861 865 836 866 805 845

OAK Select Finishes M72 M75 M73 M74 M76 M77 M71

WLT Walnut

Flat Cut



Standard Finish 872 861 870 823 860 866 839

MPL Maple

870



837





866









OAK Oak

839



837



866

823

















OAK Select Finishes

















Veneer Selections

WLT Walnut















Design Selections

Edge Style

FL Flat Edge Veneer and Laminates



BK Black Finish, Black Receptacles Silver Finish, Black Receptacles

WT White Finish, White Receptacles



Base Selections

CA Casters

3" Non-Marring Urethane Wheels

2 Locking Casters



GL Glides Leveling

3/4" Height Adjustment Range



Powder Coat Finishes

A two character sku identifies each powder coat finish offered. Individual skus are priced with standard metal finish. Non-standard finishes may incur an additional charge. The powder coat option is available on skus where noted as an option in the material specification code.

Standard Finish



PA Polished Aluminum

Powder Coat Finishes - Upcharges apply.





Serif Tables



Designed for use in flexible environments requiring reconfigurations and easy storage, options include a variety of sizes of rectangular tables that may be used with a corner top to complete a configuration. These configurations include, but are not limited to, u-shape and closed conference as shown on right.

Serif table tops are 11/4" thick and available in either a wood veneer with a standard black underside or in a laminate with a black laminate underside. Grain will run the length of the table in veneer applications.

Aluminum bases are positioned in either an edge mount or an inset mount that allows users to be seated on all four sides of the table. Base styles are available with the option of 3" heavy-duty casters with non-marring urethane wheels or with adjustable leveling guides with a height adjustment range of 3\%".

Aluminum bases are available in polished aluminum, and a variety of powder coat finishes.

Serif power options include grommet accessed power, surface power modules and dual under mount modules. A trough between bases provides a channel for wire management, electrical components and ganging bracket storage.


All tops have a multipurpose channel system designed for use with ganging brackets. Two ganging brackets are included with every table.

An optional modesty panel is available in a ½" thick laminate or wood veneer and a ¼" thick lightweight bright anodized aluminum finish panel. Twist clips insert into a pre-installed channel system. The modesty panel is hinged to swivel for storage.


Tables fold and nest for compact storage. Turning a handle, located underneath the table top, in a clockwise motion releases the top to fold. A gas spring allows the top to rest gently when folding or closing.

SCS Indoor Advantage $^{\text{TM}}$ Gold and LEVEL $^{\otimes}$ 2 certified. See terms and conditions for additional environmental information.

Configuration Options



Closed Conference

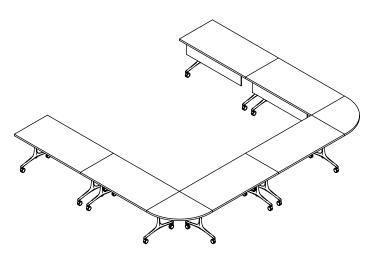

U-Shaped

Base Design

The Serif table bases are positioned in either an inset mount or an edge mount. The inset mount allows for guests to be seated on all four sides of the table. The edge mount allows guests to be seated on the two long sides of the table and is designed to provide maximum user leg space in ganging application. Tables 24"w may be ganged on short ends only.

Finish selections for the Serif base are polished aluminum and a variety of powder coat finishes.

The base is available with either 3" heavy duty casters (2 locking, 2 non-locking) with non-marring urethane wheels or with adjustable leveling glides with a height adjustment range of 34".


A trough between bases provides a channel for wire management and electrical components — only corded outlets for mobile applications are available.

An optional modesty panel may be used. Twist panel clips insert into pre-installed channels located on both sides of tables. The modesty panel is hinged to swivel when stored. Specify modesty panels separately.


Storage

Serif tables are designed to fold and nest for compact storage. The base design allows the top to be folded in a vertical position. When nested, each additional table adds only 61/2" depth and 23/8" width for storage.


A handle underneath the table top releases the top to fold when rotated in a clockwise motion. A gas spring allows the top to rest gently when it is either being folded or closed.




Inset Mount Base




Inset Mount Base Plan View




Storage Position Back View Inset Mount Base with Optional Modesty Panel




Edge Mount Base




Edge Mount Base Plan View




Storage Position Back View Edge Mount Base with Optional Modesty Panel



Folded Position End View with Optional Modesty Panel



Nested Storage Position End View with Optional Modesty Panel



Nested Storage Position Back View


Modesty Panel

Serif tables are available with a 3/4" thick modesty panel in laminate or wood veneer or a 1/4" thick lightweight bright anodized aluminum finish. Panels are 8" high with the veneer running the length of the panel.


Modesty panels are easily installed and removed by the use of simple twist-clips in conjunction with the channel system. The panel clips simply insert into the channel, then twist and lock into place. The modesty panels are hinged to swivel for storage. All tables fold and store with the modesty panels installed.


Base with Modesty Panel











Ganging Bracket


Ganging brackets hold Serif tables secure when ganged. Two brackets are required to gang each table together. Molded nylon brackets insert into channel systems located on the sides and ends of the table top. Closing a flap handle on the bracket pulls tops together and locks tables into place. Tables are released by lifting the handle on the bracket.

The Serif ganging bracket system allows tops to be ganged in any location along the channels of the tables.


Two brackets and storage plate are included with each table. The storage plate may be stored in the trough when brackets are not in use.

Patent Pending.


Ganging Brackets with Storage Plate




Ganged Tables - Side View

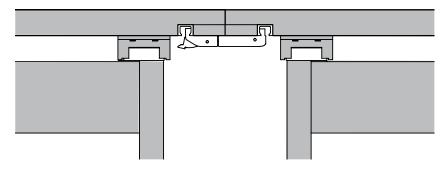

Ganging Bracket – Open Position Close flap handle to pull tops together.



Ganging Bracket -- Closed Position Lift handle to release tops.



Grommet Location


The VFB, pass through grommet, is installed into the worksurface to allow the passage of wires through the surface to a power or communication source beneath. The units easily open for access or wire passage.

The placement of these grommets must be specified on the purchase order and cannot be changed or added after an order is acknowledged and entered into production. Below are the VFB grommet placement options.

Grommet and power modules must be specified separately.

VFB Grommet


Polished Aluminum Finish



TAC Grommet Location Inset Base - All Tops Specify VFB grommet separately



TAD Grommet Location Edge Base - All Tops Specify VFB grommet separately




Data and Communication Management

The data and communication management system for Serif is comprised of a basic faceplate (VSB) that supports the installation of various Extron® AAP (Architectural Adaptor Plated) components.


The VSB silver powder coated faceplate is designed to snap into the Serif cross rail. The faceplate has an opening that will accommodate (2) single-space sized AAPs or (1) double-space sized AAP.

Serif offers different styles of Extron AAP modules. These modules allow the table to provide CAT 5e or CAT 6 data for LAN communication and provide (2) different styles of computer and audio connections for laptop connectivity. A black plate is available to fill in the extra space on the VSB faceplate if only (1) single-space sized AAP is used.

Note: The VSB and the AAPs are specified separately and shipped unassembled.



Cross Section of Channel Rail in Base VSB Data Faceplate with Extron Module



Power Management

Communication Grommets

Communication grommets are available with a polished aluminum frame and lid, or an aluminum frame with veneer or laminate lid to access power. The grommet may be installed in the center of the table or along the front edge. Specify grommet location on the purchase order.

A VFB grommet is used with the VSA corded power module. The VSA has a silver-painted faceplate with (4) 120-volt 15 amp grounded outlets, an integrated switch and breaker. The module has a 10' grounded cord and is designed to snap into the cross rail between the legs. UL Listed (EFile #E301437) and CSA Approved.

A grommet must be ordered separately to access power modules in


Surface Mount Power Modules


the stretcher.

A surface mount module is available in three finishes: black with black receptacles; silver with black receptacles or white with white receptacles. The surface module is positioned in the center of the table and consists of (2) 15 amp receptacles, (1) 2 amp USB-A port, 10 watt and (1) 2 amp USB-C port, 20 watt. A 9' grounded power cord runs through the cross rail to connect direct to the power source.

Surface mount modules are factory installed. Specify the surface mounted corded power sku option for the appropriate base position and power will be included.

Communication Grommet Access

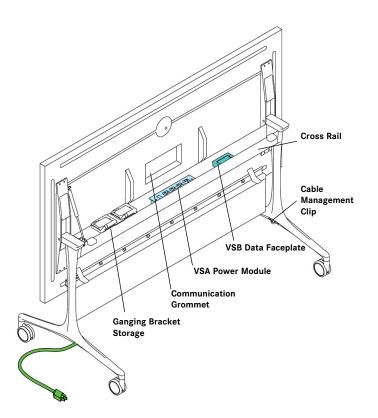


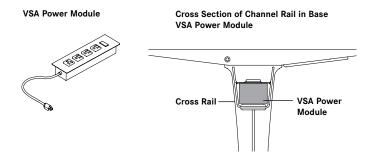

Surface Mount Power Module



Surface Mount Power Module

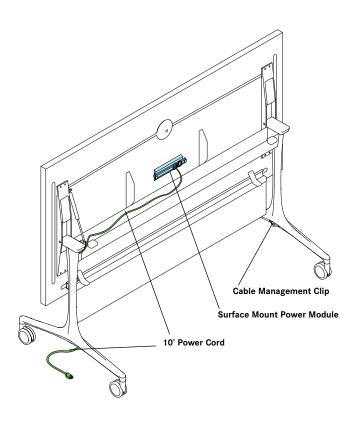

power management surface mount


Surface Mount Power Module

Serif offers a proprietary surface mount power solution allowing quick and easy daisy chain joining of tables. For the surface mount module configuration, up to four tables may be connected from a single power infeed.

The surface mount power configuration uses a (2) 15 amp receptacles, (1) 2 amp USB-A port, 10 watt and (1) 2 amp USB-C port, 20 watt module flush mounted in the center of the table.

A starter table must be specified to begin a run of tables. The starter table includes the power module control unit with the 9' cord with grounded plug that connects to the power source. It also provides circuiting allowing the add-on tables to be plugged together in any order, making set-up and reconfiguration quick and easy. All Serif tables are pre-machined for under mount power.

Surface mount configurations can only be daisy chained with other surface mount configurations.v The Serif tables with power assembly are UL962 and CSA 22.2, No. 203.2 approved.

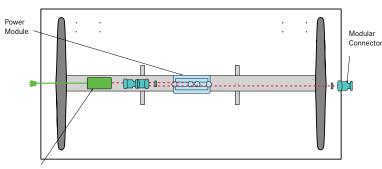

Power Module Note: All power and wiring are pre-installed on starter and add-on tables. Control Unit with

Power Module

Black, Silver or White Finish



Updated Information Shown in RED

- (2) 120 v 60 Hz. 15 amp receptacles
- (1) 2 amp USB-A port, 10 watt
- (1) 2 amp USB-C port, 20 watt

Modular Connector

Matte Black Finish Control Module with 9' Grounded Plug Installed on Starter Tables

15 amp Cord




Power Module Control Unit




15 amp grounded plug

Starter Table



Add-On Table




48"w - 60"w Tables:

A maximum of (7) add-on tables is possible for a total (8) daisy chained tables.

66"w - 72"w Tables:

A maximum of (3) add-on tables is possible for a total (4) daisy chained tables

Connecting Tables With Surface Mount Power Modules

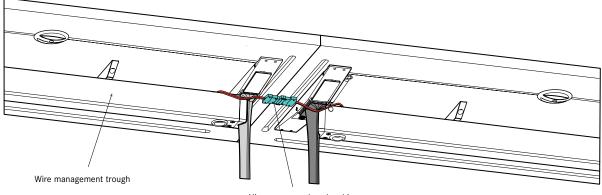

Align arrows and push whips together to connect power.


Dual Under Mount Power Module

Serif offers a proprietary under mount power solution allowing quick and easy daisy chain joining of tables. For the dual module configurations, up to four (4) tables may be connected from a single power infeed. Dual under mount power is not available for 24" tops.

The dual under mount configuration use a (1) 15 amp receptacle, (1) 2 amp USB-A port, 10 watt and (1) 2 amp USB-C port, 20 watt module that comes mounted at the edge of the table.


A starter table must be specified to begin a run of tables. The starter table includes the power module control unit with the 9' cord with grounded plug that connects to the power source. It also provides circuiting allowing the add-on tables to be plugged together in any order, making set-up and reconfiguration quick and easy.

Dual module configurations can only be daisy chained with other dual module configurations. The Serif tables with power assembly are UL962 and CSA 22.2, No. 203.2 approved.

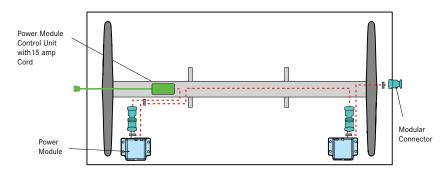

Note: All power and wiring are pre-installed on starter and add-on tables. Specify a right or left power infeed for the starter and add-on tables in a configuration.

Power Module Matte Black Finish



Modular Connector

Matte Black Finish



Power Module Control Unit

Control Module with 9" Grounded Plug Installed on Starter Tables






15 amp grounded plug

Updated Information Shown in RED


- (1) 120 v 60 Hz. 15 amp receptacle
- (1) 2 amp USB-A port, 10 watt
- (1) 2 amp USB-C port, 20 watt

Starter Table




Left Power Infeed


Add-On Table



Left Power Add-On



Connecting Tables With Dual Under Mount Power Modules

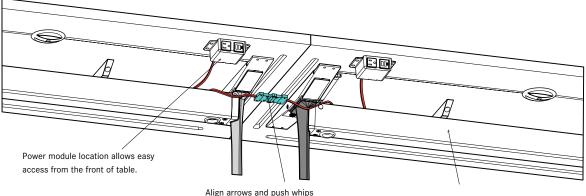

Align arrows and push whips together to connect power.

Cords concealed in table trough.



Configurations + Power

The configurations below illustrate the number of receptacles in a particular work configuration. The set-ups shown are only some of the many configurations possible. Every situation is unique and should be assessed appropriately.

Please note that power source needs to be located within 6' of each starter table.

Starter Table

Add-on Table

Power Source

Surface Mount Power Module


A maximum of (8) 48"w - 60"w tables can be daisy chained together when the surface mount power option is specified.

A maximum of (4) 66"w - 72"w tables can be daisy chained together when the surface mount power option is specified.

Surface mount configurations can only be daisy chained with other surface mount configurations.

Large Closed Conference

Conference set up with (8) 66"w - 72"w tables with surface mount power units, totaling (16) receptacles and (8) dual USB ports. Requires the customer to order (2) starter tables to power the configuration.



Classroom Seating

Classroom set up with (24) 48"w - 60"w tables with surface mount power units, totaling (16) receptacles and (8) dual USB ports per row. Requires the customer to order (1) starter table to power a row of (8) tables.



Small Closed Conference

Conference set up with (8) 66"w - 72"w tables with surface mount power units, totaling (16) receptacles and (8) dual USB ports. Requires the customer to order (2) starter tables to power the configuration.




Dual Under Mount Power Module

A maximum of (4) tables can be daisy chained together when the dual under mount power option is specified.

Dual module configurations can only be daisy chained with other dual module configurations.

Large Closed Conference

Conference set up with (8) tables with dual under mount power units, totaling (16) receptacles and (16) dual USB ports. Requires the customer to order (2) starter tables to power the configuration.



Classroom Seating

Classroom set up with (18) tables with dual under mount power units, totaling (12) receptacles and (12) dual USB ports per row. Requires the customer to order (6) starter tables to power the configuration.



Small Closed Conference

Conference set up with (8) tables with dual under mount power units, totaling (16) receptacles and (16) dual USB ports. Requires the customer to order (2) starter tables to power the configuration.



4949

4304

edge mount base - standard + communication grommet

36

72

29

120

folding table with aluminum base - edge mounted specify grommet location code when ordering table with optional communication grommet access to power channel system for ganging brackets, (2) ganging brackets included specify glides or casters; specify modesty panel separately specify separately grommet code VFB and power module VSA

	sku	w	d	h	weight	specifications	PLL solid laminate WGL woodgrain laminate	MPL maple OAK oak WLT walnut
edge mount base	EBN	48	24	29	85	short end ganging only	\$ 3124	\$ 3416
	EBM	54	24	29	90	short end ganging only	3238	3585
	EBL	60	24	29	95	short end ganging only	3350	3755
/ /	EBK	66	24	29	100	short end ganging only	3476	3926
	EBJ	72	24	29	105	short end ganging only	3596	4096
8	EBH	48	30	29	90		3350	3755
5	EBG	54	30	29	95		3535	3926
	EBF	60	30	29	100		3652	4096
	EBE	66	30	29	105		3814	4355
	EBD	72	30	29	110		3951	4572
	EBC	60	36	29	110		3951	4572
	EBB	66	36	29	115		4123	4777

specification code series	s example: SFS-SI	KU-FLCATAC edge	base style	grommet location	material + finish code example: base finish	PA WLT 839 top material	top finish
serif		FL 11/4" flat	CA casters GL glides	000 none see page 9 for location codes	PA polished aluminum powder coat upcharge \$275 BK matte black powder coat WH satin white powder coat	PLL solid laminate WGL woodgrain laminate MPL maple OAK oak WLT walnut	see pages 3-4
S F S -		FL					

edge mount base

surface mount power



HBE

HBD

66

72

30

30

edge mount base - surface mount power

29


29

105

110

folding table with aluminum base - edge mounted table includes surface mount power module with (2) 15 amp receptacles, (1) 2 amp USB-A port and (1) 2 amp USB-C port; grounded plug 9' power cord connects to power source

may be ganged in a configuration but power cannot be daisy chained channel system for ganging brackets, (2) ganging brackets included specify glides or casters; specify modesty panel separately



MPL maple

5084

5300


OAK oak

PLL solid laminate


4540

4678

	sku	W	d	h	weight	specifications	WGL woodgrain laminate
edge mount base - corded	HBN	48	24	29	85	short end ganging only	\$ 3853
	НВМ	54	24	29	90	short end ganging only	3965
	HBL	60	24	29	95	short end ganging only	4078
	HBK	66	24	29	100	short end ganging only	4204
	HBJ	72	24	29	105	short end ganging only	4322
•	HBH	48	30	29	90		4078
5	HBG	54	30	29	95		4263
	HBF	60	30	29	100		4380



HBC	60	36	29	110	4678	5300
HBB	66	36	29	115	4849	5506
HBA	72	36	29	120	5029	5677

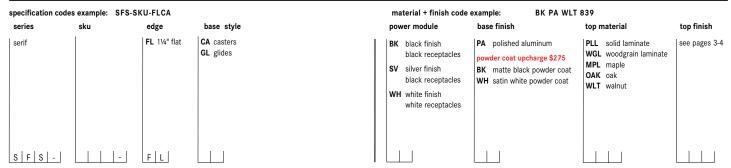

surface mount - daisy chain power

PLL solid laminate




edge mount base - surface mount - daisy chain power

folding table with aluminum base - edge mounted table includes surface mount power module with (2) 15 amp receptacles, (1) 2 amp USB-A port and (1) 2 amp USB-C port

power pre-installed - see page 11 for electrical details

starter table: power module control unit connects maximum of (8) surface mount power tables; grounded plug add-on table: use in configuration with starter table; maximum of (7) 48"w - 60"w or (3) 66"w - 72"w tables with each starter table, channel system for ganging brackets, (2) ganging brackets included specify glides or casters; specify modesty panel separately




MPL maple OAK oak

edge mount base -	starter
-------------------	---------




sku	W	d	h	weight	specifications	WGL woodgrain laminate	WLT walnut
FBN	48	24	29	85	short end ganging only	\$ 4550	\$ 4842
FBM	54	24	29	90	short end ganging only	4665	5011
FBL	60	24	29	95	short end ganging only	4777	5181
FBK	66	24	29	100	short end ganging only	4904	5351
FBJ	72	24	29	105	short end ganging only	5021	5522
FBH	48	30	29	90		4777	5181
FBG	54	30	29	95		4962	5351
FBF	60	30	29	100		5077	5522
FBE	66	30	29	105		5238	5781
FBD	72	30	29	110		5376	5998
FBC	60	36	29	110		5376	5998
FBB	66	36	29	115		5547	6204
FBA	72	36	29	120		5729	6375




edge mount base - add-on



GBN	48	24	29	85	maximum 7 add-on tables for every starter table	3950	4242
GBM	54	24	29	90	maximum 7 add-on tables for every starter table	4066	4410
GBL	60	24	29	95	maximum 7 add-on tables for every starter table	4175	4580
GBK	66	24	29	100	maximum 3 add-on tables for every starter table	4304	4751
GBJ	72	24	29	105	maximum 3 add-on tables for every starter table	4422	4923
GBH	48	30	29	90	maximum 7 add-on tables for every starter table	4175	4580
GBG	54	30	29	95	maximum 7 add-on tables for every starter table	4361	4751
GBF	60	30	29	100	maximum 7 add-on tables for every starter table	4478	4923
GBE	66	30	29	105	maximum 3 add-on tables for every starter table	4640	5181
GBD	72	30	29	110	maximum 3 add-on tables for every starter table	4777	5398
GBC	60	36	29	110	maximum 7 add-on tables for every starter table	4777	5398
GBB	66	36	29	115	maximum 3 add-on tables for every starter table	4949	5603
GBA	72	36	29	120	maximum 3 add-on tables for every starter table	5130	5774



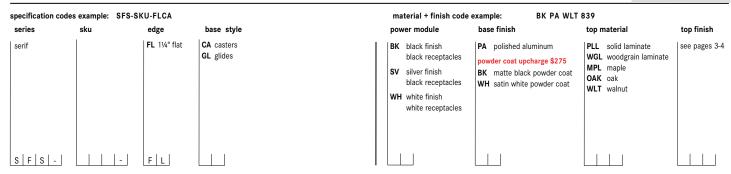

dual under mount - daisy chain power


PLL solid laminate

edge mount base - dual under mount - daisy chain power

folding table with aluminum base - edge mounted table includes (2) under mount power modules with (1) 15 amp receptacle, (1) 2 amp USB-A port and (1) 2 amp USB-C port


power pre-installed - see page 12 for electrical details


starter table: power module control unit connects maximum of (4) dual power tables; grounded plug add-on table: use in configuration with starter table; maximum of (3) add-on tables with each starter table specify power location code LP for left hand power infeed; RP for right hand power infeed, specify glides or casters channel system for ganging brackets, (2) ganging brackets included, specify modesty panel separately



MPL maple OAK oak

	sku	W	d	h	weight	specifications4163	WGL woodgrain laminate	WLT walnut
edge mount base - starter	СВН	48	30	29	90		\$ 5003	\$ 5405
	CBG	54	30	29	95		5187	5578
	CBF	60	30	29	100		5303	5749
	CBE	66	30	29	105		5465	6005
	CBD	72	30	29	110		5603	6223
	CBC	60	36	29	110		5603	6223
1	CBB	66	36	29	115		5774	6429
6	CBA	72	36	29	120		5954	6599






LP Left Power Infeed


RP Right Power Infeed

edge mount base - add-on



DBH	48	30	29	90	maximum 3 add-on tables for every starter table	4477	4880
DBG	54	30	29	95	maximum 3 add-on tables for every starter table	4662	5052
DBF	60	30	29	100	maximum 3 add-on tables for every starter table	4778	5223
DBE	66	30	29	105	maximum 3 add-on tables for every starter table	4939	5480
DBD	72	30	29	110	maximum 3 add-on tables for every starter table	5076	5700
DBC	60	36	29	110	maximum 3 add-on tables for every starter table	5076	5700
DBB	66	36	29	115	maximum 3 add-on tables for every starter table	5248	5901
DBA	72	36	29	120	maximum 3 add-on tables for every starter table	5427	6074





LP Left Power Add-On

RP Right Power Add-On

specification codes e	xample: SFS-SK	U-FLCA		ma	nterial + finish code example: PA V	material + finish code example: PA WLT 839						
series s	sku	edge	base style		base finish	top material	top finish					
serif			CA casters GL glides		powder coat upcharge \$275 BK matte black powder coat WH catin white powder coat	PLL solid laminate WGL woodgrain laminate MPL maple OAK oak WLT walnut	see pages 3-4					

inset mount base - standard + communication grommet

folding table with aluminum base - edge mounted specify grommet location code when ordering table with optional communication grommet access to power channel system for ganging brackets, (2) ganging brackets included specify glides or casters; specify modesty panel separately specify separately grommet code VFB and power module VSA

	sku	w	d	h	weight	specifications	PLL solid laminate WGL woodgrain laminate	MPL maple OAK oak WLT walnut
inset mount base	ICF	60	30	29	100		\$ 3544	\$ 4266
	ICE	66	30	29	105		3806	4481
	ICD	72	30	29	110		3941	4572
	ICC	60	36	29	110		3941	4572
	ICB	66	36	29	115		4123	4797
	ICA	72	36	29	120		4304	5046

series	codes example: SFS sku	edge	base style	grommet location	base finish	top material	top finish
serif		FL 11/4" flat	CA casters GL glides	000 none see page 9 for location codes	PA polished aluminum powder coat upcharge \$275 BK matte black powder coat WH satin white powder coat	PLL solid laminate WGL woodgrain laminate MPL maple OAK oak WLT walnut	see pages 3-4
 S F S -		FIL					

inset mount base surface mount power




inset mount base - surface mount power


folding table with aluminum base - inset mounted table includes surface mount power module with (2)15 amp receptacles, (1) 2 amp USB-A port and (1) 2 amp USB-C port 9' power cord connects to power source; grounded plug see page 12 for electrical details

may be ganged in a configuration but power cannot be daisy chained

channel system for ganging brackets, (2) ganging brackets included specify glides or casters; specify modesty panel separately



							PLL solid laminate WGL woodgrain laminate	OAK oak WLT walnut
	sku	W	d	h	weight	specifications		
inset mount base - corded	HCF	60	30	29	100		\$ 4272	\$ 4995
	HCE	66	30	29	105		4534	5210
	HCD	72	30	29	110		4670	5300
	HCC	60	36	29	110		4670	5300
	HCB	66	36	29	115		4849	5523
	HCA	72	36	29	120		5029	5774



specification code	s example: SFS-SI	KU-FLCA		material + finish code example: BK PA WLT 839					
series	sku	edge	base style		power module	base finish	top material	top finish	
serif		FL 1¼" flat	CA casters GL glides		BK black finish black receptacles SV silver finish black receptacles WH white finish white receptacles	PA polished aluminum powder coat upcharge \$275 BK matte black powder coat WH satin white powder coat	PLL solid laminate WGL woodgrain laminate MPL maple OAK oak WLT walnut	see pages 3-4	


surface mount - daisy chain power




inset mount base - surface mount - daisy chain power

folding table with aluminum base - inset mounted table includes surface mount power module with (2) 15 amp receptacles, (1) 2 amp USB-A port and (1) 2 amp USB-C port power pre-installed - see page 11 for electrical details

starter table: power module control unit connects maximum of (8) surface mount power tables add-on table: use in configuration with starter table; maximum of (7) 48"w - 60"w or (3) 66"w - 72"w tables with each starter table, channel system for ganging brackets, (2) ganging brackets included specify glides or casters; specify modesty panel separately



	sku	w	d	h	weight	specifications	PLL solid laminate WGL woodgrain laminate	MPL maple OAK oak WLT walnut
inset mount base - starter	FCF	60	30	29	100		\$ 4971	\$ 5692
	FCE	66	30	29	105		5232	5907
^	FCD	72	30	29	110		5369	5999
	FCC	60	36	29	110		5369	5999
	FCB	66	36	29	115		5547	6221
	FCA	72	36	29	120		5729	6471



inset mount base - add-on	GCF	60	30	29	100	maximum 7 add-on tables for every starter table	4370	5091
	GCE	66	30	29	105	maximum 3 add-on tables for every starter table	4631	5307
	GCD	72	30	29	110	maximum 3 add-on tables for every starter table	4767	5398
	GCC	60	36	29	110	maximum 7 add-on tables for every starter table	4767	5398
	GCB	66	36	29	115	maximum 3 add-on tables for every starter table	4949	5623
	GCA	72	36	29	120	maximum 3 add-on tables for every starter table	5130	5871





specification code	s example: SFS-SI	KU-FLCA		material + finish code example: BK PA WLT 839				9		
series	sku	edge	base style		pow	ver module	base finish	t	op material	top finish
serif		FL 1¼" flat	CA casters GL glides		sv wh	black receptacles silver finish	PA polished aluminum powder coat upcharge \$275 BK matte black powder coat WH satin white powder coat	N C	LL solid laminate //GL woodgrain laminate IPL maple AK oak //LT walnut	see pages 3-4
S F S -		FL		Į						


dual under mount - daisy chain power

inset mount base - dual under mount - daisy chain power

folding table with aluminum base - inset mounted table includes (2) under mount power modules with (1)15 amp receptacle, (1) 2 amp USB-A port and (1) 2 amp USB-C port


power pre-installed - see page 12 for electrical details


starter table: power module control unit connects maximum of (4) dual power tables; grounded plug add-on table: use in configuration with starter table; maximum of (3) add-on tables with each starter table specify power location code LP for left hand power infeed; RP for right hand power infeed, specify glides or casters channel system for ganging brackets, (2) ganging brackets included, specify modesty panel separately



MPL maple


	sku	w	d	h	weight	specifications	PLL solid laminate WGL woodgrain laminate	OAK oak WLT walnut
inset mount base - starter	CCF	60	30	29	100		\$ 5196	\$ 5918
	CCE	66	30	29	105		5456	6131
	CCD	72	30	29	110		5593	6223
	CCC	60	36	29	110		5593	6223
	CCB	66	36	29	115		5774	6447
	CCA	72	36	29	120		5954	6697






LP Left Power Infeed


RP Right Power Infeed



	0
5	

DCF	60	30	29	100	maximum 3 add-on tables for every starter table	4670	5394
DCE	66	30	29	105	maximum 3 add-on tables for every starter table	4930	5606
DCD	72	30	29	110	maximum 3 add-on tables for every starter table	5067	5700
DCC	60	36	29	110	maximum 3 add-on tables for every starter table	5067	5700
DCB	66	36	29	115	maximum 3 add-on tables for every starter table	5248	5922
DCA	72	36	29	120	maximum 3 add-on tables for every starter table	5427	6172





LP Left Power Add-On

RP Right Power Add-On

specification code	s example: SFS-SI	KU-FLCA		material + finish code example: BK I					
series	sku	edge	base style		pov	wer module	base finish	top material	top finish
serif		FL 11/4" flat	CA casters GL glides		sv	black receptacles	PA polished aluminum powder coat upcharge \$275 BK matte black powder coat WH satin white powder coat	PLL solid laminate WGL woodgrain laminate MPL maple OAK oak WLT walnut	see pages 3-4
S F S -		FL							

corner top



pie shaped top mounting hardware included when using the corner worksurface in conjunction with surface mount daisy chained power, jumpers must be ordered. see page 26.

	sku	w d	h	weight	specifications	PLL solid laminate WGL woodgrain laminate	MPL maple OAK oak WLT walnut
corner worksurface	YDG	24	24	11⁄4	30	\$ 1304	\$ 1995
	YDF	30	30	11/4	35	1366	2036
	YDE	36	36	11⁄4	40	1767	2706

Note: When using the corner worksurface in conjunction with surface mount daisy chained power, jumpers must be ordered. Jumpers count as a power unit when calculating the number of tables in a powered configuration. See page 26.



!	ales.	ada.	Ann madanial	Ann finial
series	sku	edge	top material	top finish
serif		FL 11/4" flat	PLL solid laminate WGL woodgrain lami MPL maple OAK oak WLT walnut	see pages 3-4

BERNHARDT design

modesty panel for serif tables



available in laminate, veneer and aluminum aluminum panel available in polished aluminum and a variety of powder coat finishes installs with twist-lock panel clips specify material and finish codes

WHX 361/2 3/4 8 5 use with 72" w inset mount base; 48" w edge mount base 670 1384		sku	w	d	h	weight	specifications	PLL solid laminate WGL woodgrain laminate	MPL maple OAK oak WLT walnut
WHX 361/2 3/4 8 5 use with 72" w inset mount base; 48 "w edge mount base 670 1384	wood veneer or laminate	WHZ	241/2	3/4	8	4	use with 60"w inset mount base	\$ 557	\$ 1224
	modesty panel	WHY	301/2	3/4	8	4	use with 66"w inset mount base	592	1285
WHW 421/2 3/4 8 5 use with 54" wedge mount base 692 1422 WHV 481/2 3/4 8 6 use with 60" wedge mount base 727 1472		WHX	361/2	3/4	8	5	use with 72"w inset mount base; 48"w edge mount base	670	1384
VIII TO 2 14 0 0 disc with do wedge mount base 121 1412		WHW	42½ 48½	3/ ₄	8	<u>5</u>	use with 54"w edge mount base use with 60"w edge mount base	692 727	1422 1472
WHU 54½ ¾ 8 6 use with 66"w edge mount base 758 1501		WHU	541/2	3/4	8	6	use with 66"w edge mount base	758	1501
WHT 60½ ¾ 8 6 use with 72"w edge mount base 786 1567		WHT	601/2	3/4	8	6	use with 72"w edge mount base	786	1567

specification code	s example: SFS-S	KU	mate	erial + finish code examp	e: WLT 839
series	sku	edge		top material	top finish
serif			\	PLL solid laminate WGL woodgrain laminate MPL maple DAK oak WLT walnut	see pages 3-4
S F S -					

	sku	W	d	h	weight	specifications	aluminum
bright anodized	MHZ	241/2	1/4	8	4	use with 60"w inset mount base	\$ 396
aluminum modesty panel	MHY	301/2	1/4	8	4	use with 66"w inset mount base	396
	MHX	361/2	1/4	8	5	use with 72"w inset mount base	419
	MHX	36½ 42½	1/4	8	<u>5</u>	use with 48"w edge mount base use with 54"w edge mount base	419 437
	MHV	481/2	1/4	8	6	use with 60"w edge mount base	454
	MHU	541/2	1/4	8	6	use with 66"w edge mount base	477
	MHT	601/2	1/4	8	6	use with 72"w edge mount base	496



power options under mount


	description	sku	w	d	h	price
	under mount replacement housing	UPH	73/8	3¾	11/2	\$ 193
	for use with Extron® MAAP installed in the field by end user					
	computer/audio/video mini module	MP1	21/8	-	5/8	370
	Extron® MAAP HDMI female to HDMI female on 1 single space insert	0"pigtail				
	computer/audio/video mini module	MP3	21/8	-	5/8	370
	Extron® MAAP display port female to display port single space insert	female on 1	IO" pigtail			
	phone/data mini module	MP4	21/8	-	5/8	256
	Extron® MAAP one RJ45 female to punch down leviton CAT6 data single space insert					
S	phone/data mini module	MP5	21/8	-	5/8	221
-	Extron® MAAP one RJ45 female to female barrel single space insert					
•	blank plate	MP6	21/8	-	5/8	144
	Extron® MAAP blank plate black powder coat finish single space insert					

specification codes example: ACS-SKU series sku

A | C | S | - |



description	sku	w	d	h	weight	specifications	price
communication grommet	VFB	91/2	41/8	11/4	5		\$ 662



available only in polished aluminum frame

use with laminate or veneer tops specify location when ordering top specify material and finish codes

aluminum

specification codes example: ACS-SKU series sku accessories



					.=-	_		
\wedge	power module	VSA	101/2	21/2	17⁄8	2		\$ 540
ST S	silver powder coat faceplate							
	(4) 120 v 60 Hz. 15 amp grounded 10' with a three-wire grounded plug		S					
	intergraded switch and breaker							
Gr.	snaps into stretcher channel rail UL/CSA Listed							
	power module	UPK	43/4	31/2	11/2			303
	(2) 120 v 60 Hz. 15 amp grounded	eceptacles						
	9' cord grounded plug UL 962 listed							
	Not for use with surface mount or o	ual module	configura	tions				
	Can be added to any Serif standard		_		e			
	power module	UPM	43/4	31/2	11/2			529
	(1) 120 v 60 Hz. 15 amp receptacle							
	(1) 2 amp USB-A port, 10 watt (1) 2 amp USB-C port, 20 watt							
	9' cord grounded plug UL 962 listed							
	Not for use with surface mount or c Can be added to any Serif standard		_		e			
	jumper kit	JMC	24	11/4	11/2	1	use with 24" corner worksurface	133
		JMF Note: Whe	42 n using the	11/4 corner w	11/2 orksurfac	1 e in conjunct	use with 30 and 36" corner worksurfaces tion with surface mount daisy chained	145
M.			pers must	be ordere	d. Jumper		power unit when calculating the number of	
	ganging brackets	H84	91/4	3	3/4	1		208
	(2) replacement brackets with stora	ge plate						
	molded nylon stores in cross rail when not in use							
		E5E	1	1	7 /8	1		72
<u> </u>	cable clamp							
<u> </u>								
<u> </u>	cable clamp for underside of table (4) clips per package gray finish							


series sku

accessories

A | C | S | - |


mediatrac1™ extron® AAP modules

	description	sku	W	d	h		price
	power strip	VNY	121/4	2	13/4		\$ 525
	6 outlet center; 110v 15 amp 15' plug-in cord surge protector UL Listed						
	blank data faceplate	VSB	4	3	1/16	1	113
}	silver powder coat finish designed for use with Extron® A/ double space opening for use with 2 single space or 1 d		module				
	blank plate	VGG	31/2	-	5/8		154
L	Extron® AAP blank plate with bla single space insert	ack powder co	at finish				
	cable pass-through module	VGY	31/2	-	13/8		441
		200 100 110 110		· · ·			
	Extron® AAP cable pass-through sold and ordered as 1 set with le single space insert		wder coat	finish			
	sold and ordered as 1 set with le		31/2	finish	5/8		332
	sold and ordered as 1 set with le single space insert	eft and right	31/2		5/g		332
	sold and ordered as 1 set with le single space insert phone/data module Extron® AAP two RJ-45 pass-thro	eft and right	31/2		5/8 5/8		
	sold and ordered as 1 set with lessingle space insert phone/data module Extron® AAP two RJ-45 pass-throsingle space insert	eft and right VGD Dugh barrels C	3½ AT 5e				
	phone/data module Extron® AAP two RJ-45 pass-throsingle space insert phone/data module Extron® AAP one RJ-45 female to punch down block leviton CAT6 data	eft and right VGD Dugh barrels C	3½ AT 5e				266
	phone/data module Extron® AAP two RJ-45 pass-throsingle space insert phone/data module Extron® AAP one RJ-45 female to punch down block leviton CAT6 data single space insert	VGD VGK	3½ AT 5e 3½	-	5/6		266



mediatrac1™ extron® AAP modules

	description	sku	w	d	h	price
alal	phone/data module	VGL	31/2	-	5/8	\$ 369
	Extron® AAP two RJ-45 female to punch down block AMP CAT6 data single space insert					
	phone/data module	VGQ	31/2	-	13/8	\$ 502
	Extron® AAP two RJ-45 female to punch down block higher than CAT6 data type conne- systomax MGS500 backward com- double space insert					
•	computer/audio/video module	VG3	31/2	-	5/8	369
	Extron® AAP HDMI female to HDMI female on 1 single space insert	0" pigtail				
	control/computer module	VGR	31/2	-	5/8	369
	Extron® AAP two USB A female to female barrels single space insert					
*° 🖟 🖘 🗔	power plate charging module	VG9	31/2	-	5/8	1265
D TO THE STATE OF	type 5 VDC USB C power outlet 3 type 5 VDC USB A power outlet 2. of power for charging mobile device single space insert	1A/10.5 wa				
*•∮	usb charging module	VGU	31/2	-	5/8	717
	Extron® AAP Power Plate charging 2 5 VCD USB power outlets 2.1 A / 10.5 watts of power for ch single space insert		ile devices			
1 • • •	computer/audio/video module	VG6	31/2	_	15/8	586
	Extron® SuperPlate 110 - HDMI/Di HDMI: female to female, 10" (25 c DisplayPort: female to female, 10" Stereo/Audio: 3.5 mm mini jack to USB A: female to female, 10" (25 d double space insert	m) pigtail (25 cm) pig captive sc	gtail		gtail	



Prices and Specifications

Prices and specifications are subject to change without notice. All prices quoted will be FOB our factories. If applicable, sales tax will be based on ship-to destination.

Bernhardt Design reserves the right to make changes in dimensions, construction, price lists, or product literature without prior notice.

All measurements and weights are approximate and subject to change without notice.

Order Entry

All orders are subject to final acceptance by Bernhardt Design in Lenoir, NC. Receipt of our acknowledgment indicates acceptance of your order subject to the terms set forth on the acknowledgment.

Bernhardt Design attempts to clarify all purchase orders. However, in the event the price list number and description on the purchase order differ, the price list number will prevail.

Changes/Cancellation

All orders in production are considered firm orders and are not subject to changes or cancellation.

Shipping

Bernhardt Design will ship in accordance with customer instructions whenever possible. For convenience, Bernhardt Design offers a guaranteed freight program (GFP). Bernhardt Design will exercise our best judgment in selecting a carrier under our GFP. When selecting a carrier, Bernhardt Design will make our best effort to meet requested delivery dates.

Transportation lead-times and delays including equipment problems, weather, general traffic, traffic accidents, customer warehouse space, labor disputes, customer changes, etc., that occur on a carrier will not be the responsibility of Bernhardt Design. Furthermore, Bernhardt Design will not be responsible for additional costs incurred due to aforementioned delays.

For customers who decline our GFP, Bernhardt Design will stage orders for pick up at 1% of the list price, or \$75 minimum.

Customer orders in production will be shipped as scheduled and will not be held. Bernhardt Design reserves the right to make partial shipments on any order, unless notified otherwise by the customer.

High quality cartoning meeting trucking and railroad specifications is standard at no extra charge. Some items may be blanket wrapped for shipment.

Freight Damage and Claims

Bernhardt Design is not liable for any damages to products that occur during transit or storage. The carrier assumes all responsibility upon acceptance of product. It is the customer's responsibility to inspect products upon receipt and file any claims with the carrier. No product should be refused. If products are received damaged, a written exception should be made on the bill of lading and an immediate inspection be requested of the carrier.

Concealed damage must be reported to the carrier within 10 business days from date of delivery. Failure to make claims shall constitute acceptance of the products and waiver any claims of defects, errors or shortages.

In the event delivery is made on a Bernhardt Design truck, the products should be carefully inspected for transit damage. If contents are damaged, the driver should be notified to call his dispatcher for immediate disposition.

Concealed damage must be reported within 10 business days from date of delivery and product/packaging held for inspection by a Bernhardt Design representative. Replacements for product damaged in shipment or storage will be manufactured upon receipt of a purchase order.

Returns

No merchandise may be returned to Bernhardt Design without written consent in the form of a Return Authorization from our Quality Assurance Department stating why item is being returned and how item will be shipped.

Unauthorized returns will be automatically refused by our receiving department as well as returns not in accordance with Bernhardt Design shipping instructions. Liability for defective merchandise shall be limited to the replacement or repair of that merchandise, and Bernhardt Design shall not be liable for other damages or losses.

Terms and Credit

Pricing and terms of sale apply to orders accepted by Bernhardt Design, and no terms, stipulations, or conditions contained in the dealer's submitted purchase orders shall have any force or effect. Bernhardt Design requires a completed and signed credit application from every dealer. Bernhardt Design also requires dealers to provide a Blanket Certificate of Resale/Use containing valid sales tax exemption number(s) for their respective state(s).

If credit has been approved, the standard terms for all Bernhardt Design products are Net 30 from the invoice date. In certain instances, as an additional condition of order acceptance, buyer may be required to provide a deposit at time of order and/or remit the balance before shipment is released. If credit has not been approved, a 100% prepayment, including any freight charges, is required prior to production.

Acceptable forms of payment include a certified check or electronic bank transfer. For information on where to send check/electronic bank information contact our Financial Services Department. If a dealer or company check is submitted, three (3) weeks should be allowed for the clearance of the check. If electronic bank transfer is submitted, one (1) week should be allowed for the clearance of the electronic bank transfer. The order is subject to cancellation if payment in full is not received within three (3) weeks from the acknowledgment date.

The dealer may not make deductions for advertising, promotions, quality problems, freight, or any other reason without prior authorization by Bernhardt Design. Such a deduction could result in the curtailment or suspension of further shipments until the matter is resolved. Delinquency notices are generated and mailed periodically. Service charges of 18% per annum will be added to each past-due transaction. Unpaid service charges

will be accrued and invoiced on a periodic basis. Past-due notices may result in orders being held until the situation is resolved. This credit hold could prevent orders from being placed into production or shipped. Orders not in production that are placed on credit hold for three (3) weeks will be subject to cancellation.

Severe past-due situations may result in the employment of a collection agency or other collection litigation. If any collection activity is necessary regarding a dealer account, the dealer will be responsible for the payment of any and all attorney and collection agency fees.

A slow payment history may result in reducing or eliminating an open line of credit. At the discretion of Bernhardt Design, amounts owed by a dealer to Bernhardt Design arising from any transaction or dealings between the dealer and Bernhardt Design may be offset against any amounts owed to the dealer by Bernhardt Design.

Warranty

Bernhardt Design will repair or replace, at its discretion, any product or part thereof which fails as the result of defects in material and workmanship, under single shift use and normal care for five years from date of shipment. This warranty shall apply only to the original purchaser.

This warranty does not cover normal wear and tear, misuse or abuse of product, dramatic temperature changes, exposure to unusual conditions or damages incurred by contact with seating products, tables, desks or other surfaces. Natural color changes, variations or movements in lumber or veneer products, exposure to extreme temperature changes and direct sunlight may cause color changes and/or surface damage. These are circumstances beyond the control of Bernhardt Design and are not warranty issues. Repair or replacement of discontinued product will be at the discretion of Bernhardt Design.

This warranty is the customer's exclusive remedy for product defect and does not apply to damage caused by a freight carrier, dealer, installer, user modification, attachments to a product, or any third party. Bernhardt Design has the exclusive right to make the final determination of product misuse or abuse. Except as stated above, Bernhardt Design makes no express or implied warranties as to any product, and in particular, makes no warranty of merchantability or of fitness for any particular purpose. Bernhardt Design shall not be liable for any consequential or incidental damages or for commercial loss arising from any product defect.

Operational Parts Warranty

Drawer glides, drawer boxes, drawer pulls, and lock mechanisms have a Life-Time Warranty for original purchaser. Power and communication components are warranted for one year.

Parts Order

Bernhardt Design parts have a \$25 net minimum per order. This does not include freight costs.

Custom Design

Bernhardt Design may alter products to meet specific needs. Contact your local sales representative when a custom design is needed. Custom designs,

if approved, require minimum quantities, additional leadtime and upcharges. A custom job number, available from your Bernhardt Design sales representative, must be submitted with purchase orders.

Orders combining custom design with standard product cannot be scheduled for production until custom items are approved. Custom design orders are not subject to revision or cancellation after acknowledgment.

Wood Finishes

Bernhardt Design tables are available in finishes that are compatible with credenzas and seating finishes. However, finishes on tables may vary slightly from those on seating due to the natural characteristics of the wood. No absolute match is implied or guaranteed.

Light Finishes

Bernhardt Design offers lighter finishes on certain veneers and solid woods. When specifying light finishes the natural characteristics of the wood will be visible and color will vary.

Natural characteristics include the natural discolorations of the wood substance and color variations in glued up stock. These natural characteristics are not considered defects by Bernhardt Design, and therefore merchandise will not be replaced.

Special Finishes

Special finishes, made to customer specifications and subject to factory approval, may be available at a 10% net upcharge with a \$500 net minimum.

Additional leadtime may be required for special finish items. Special finish orders will not be acknowledged until the special finish sample is approved in writing and received by Bernhardt Design Customer Service. Special finish orders are not subject to revision or cancellation after acknowledgment.

Installation and Maintenance

All freestanding tables and credenzas are equipped with leveling devices. Local floor conditions vary, and it is always necessary to properly adjust leveling devices. Proper leveling is essential to the alignment and function of doors and drawers.

Improperly leveled units result in misaligned doors and drawers and may impair locking mechanisms or other functional hardware.

After the initial installation of credenzas, it may be necessary to readjust and align the units to compensate for settling. This should be expected as a matter of routine maintenance and follow-up to assure proper case function.

Proper installation of Bernhardt Design tables and credenzas is the responsibility of the dealer. Improperly installed units can result in permanent damage to case components. Damage due to improperly installed furniture not covered under product warranty.

Orders combining custom design with standard product cannot be scheduled for production until custom items are approved. Custom design orders are not subject to revision or cancellation after acknowledgment.

Care and Cleaning

Finished wood surfaces should be cleaned with a soft damp cloth, wiping in the direction of the grain. Furniture should be buffed dry immediately with a soft cloth.

Design and Patent Rights

All of the products shown in Bernhardt Design catalogs and described in Bernhardt Design price lists are, and remain, the property of Bernhardt Design, with the sole right reserved to manufacture and to distribute.

Some of the product designs shown are patented in the United States and will remain the property of Bernhardt Design. Any reproduction of the products constitutes an infringement of patented copyright laws and will be subject to prosecution.

Environmental

Some tables and credenzas are LEVEL® for ANSI/BIFMA e3-2019 − Furniture Sustainability Standard and SCS Indoor Advantage™ Gold certified. Visit the product page at bernhardtdesign.com for certifications.

BERNHARDT design

Bernhardt Design is a registered trademark of Bernhardt Furniture Company of Lenoir, NC.

Preferred Carrier Guaranteed Freight Rates

Freight charges will be applied to orders as a separate line item based on the zones listed. Rates are based on zones with a minimum for each zone. All zones are located within the Continental United States.

The freight amount is calculated on the total merchandise list COM price. Additional freight fuel surcharges may apply. Rates are based on deliveries made Monday through Friday, 8 am until 5 pm.

All orders are shipped by Bernhardt Design company trucks or preferred carriers specified by Bernhardt Design. If a purchase order does not specify that the product must ship complete, Bernhardt Design reserves the right to select the most effective shipping method necessary, including split shipments. Dealer warehouse information, including phone number and contact name, must be specified on the purchase order.

Direct site deliveries may be requested with an additional freight cost. Requests for direct site deliveries must be made 2 weeks prior to the scheduled ship week and meet the following criteria:

- ·Minimum of half truckload
- •Delivery site accessible by a 53' trailer
- •Complete delivery site address with contact name and on-site phone number
- ·Labor available for unloading

Deliveries that do not meet the criteria must be directed to a receiver warehouse. If a receiver warehouse is not available, the dealer may make arrangements with their own 3rd party carrier. If a 3rd party carrier is elected, a contact name, phone number and e-mail address is required.


Bernhardt Design has a no touch freight policy. Drivers are not allowed to unload freight.

Weekend direct site deliveries will incur a \$500 per trailer weekend delivery fee. Weekend is defined as between 5 pm Friday and 8 am Monday.

Customers who decline GFP should refer to the shipping section of the Terms and Conditions page.

Zone	Percent	Minimum
Zone 1	3%	\$150
Zone 2	4%	\$150
Zone 3	5%	\$150
Zone 4	6%	\$150
Zone 5	7%	\$150

Percent bases on List Price.

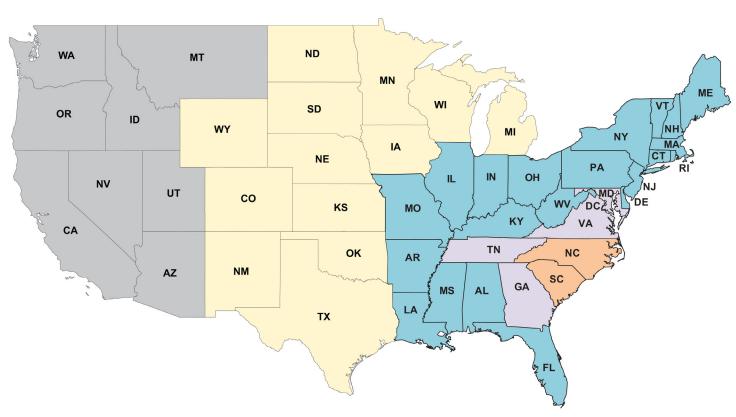

Preferred Carrier Guaranteed Freight Rates - Canada

Freight charges will be applied to orders as a separate line item based on the zones listed. Rates are based on zones with a minimum for each zone.

The freight amount is calculated on the total merchandise list COM price. Additional freight fuel surcharges may apply. Rates are based on deliveries made Monday through Friday, 8 am until 5 pm.

All orders are shipped by Bernhardt Design company trucks or preferred carriers specified by Bernhardt Design. If a purchase order does not specify that the product must ship complete, Bernhardt Design reserves the right to select the most effective shipping method necessary, including split shipments. Dealer warehouse information, including phone number and contact name, must be specified on the purchase order.

Direct site deliveries may be requested with an additional freight cost. Requests for direct site deliveries must be made 2 weeks prior to the scheduled ship week and meet the following criteria:

- •Minimum of half truckload
- •Delivery site accessible by a 53' trailer
- •Complete delivery site address with contact name and on-site phone number
- ·Labor available for unloading

Deliveries that do not meet the criteria must be directed to a receiver warehouse. If a receiver warehouse is not available, the dealer may make arrangements with their own 3rd party carrier. If a 3rd party carrier is elected, a contact name, phone number and e-mail address is required.

Bernhardt Design has a no touch freight policy. Drivers are not allowed to unload freight.

Weekend direct site deliveries will incur a \$500 per trailer weekend delivery fee. Weekend is defined as between 5 pm Friday and 8 am Monday.

Customers who decline GFP should refer to the shipping section of the Terms and Conditions page.

Zone	Minimums	Freight	Avg. Bus. Days
Zone 1	\$200	5%	10-15
Zone 2	\$200	9%	10-15
Zone 3	\$200	8%	10-15
Zone 4	\$200	11%	10-15
Zone 5	Quote	Quote	

The attached rates are strictly freight and do not include brokerage fees.

