

## hudson price list

january 2026



index	2	<b>tables</b>	18
<b>collection overview</b>	3	c-base standard + grommet	19
laminate selections	4	t-base edge standard + grommet	20
veneer selections	5-6	t-base inset standard + grommet	21
powder coat selections + design selections	7	c-base inset half round	22
overview	8	c-base inset teleconference	23
c-base + storage	9	t-base inset teleconference	24
t-base + storage	10	corner worksurface	25
modesty panel + ganging brackets	11	modesty panels	26
PowerBridge power module + installation	12	<b>power + accessories</b>	27
PowerBridge cable routing - corded and daisy chained	13	PowerBridge power options	28
Power Management - PowerBridge power module	14	Dean power options	29
Power Management - Dean power module	15	power options + wire management	30
Dean power module + surface mount grommet locations	16	terms and conditions	31-32
configurations + power	17	guaranteed freight	33
		guaranteed freight - canada	34



collection overview

**Laminate Selections**

A three character sku identifies each laminate selection as well as the standard finish offered. Individual components are priced with standard finish on standard laminate.

A variety of Wilsonart® standard laminates with standard finishes is offered on conference and multipurpose tables. Additional colors may be available but are

subject to upcharges and extended lead times. The laminate option is available on components where noted as an option in the material specification code.

All laminate tops will have a 3mm matching edge band.


**PLL Solid Laminate**

Standard Solid

- 671 Designer White, Wilsonart D354-60 Matte Finish
- 672 Frosty White, Wilsonart 1573-60 Matte Finish
- 673 Fashion Grey, Wilsonart D381-60 Matte Finish
- 674 North Sea, Wilsonart D90-60 Matte Finish
- 675 Black, Wilsonart 1595-60 Matte Finish

**20% Upcharge**

- 665 Snow White Velvet, Wilsonart 15501-31 Traceless Laminate
- 666 Charcoal Velvet, Wilsonart 15504-31 Traceless Laminate
- 667 Black Velvet, Wilsonart 15505-31 Traceless Laminate

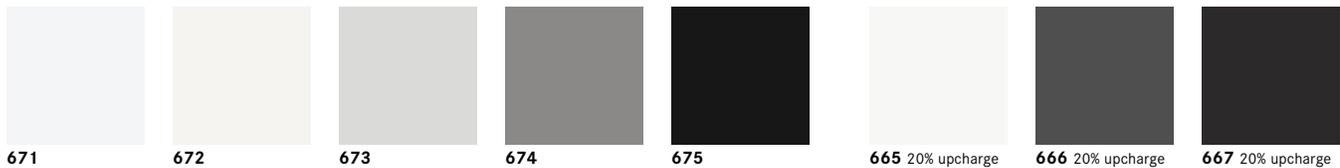

**WGL Woodgrain Laminate**

Standard Woodgrain

- 684 Phantom Pearl, Wilsonart 8211K-28 Gloss Line Finish w/Aeon Scratch Resistant Protection
- 685 Raw Chestnut, Wilsonart 7975K-12 Soft Grain Finish w/Aeon Scratch Resistant Protection
- 686 High Line, Wilsonart 7970K-18 Linearity Finish w/Aeon Scratch Resistant Protection
- 678 New Age Oak, Wilsonart 7938-16 Casual Rustic Finish
- 679 Brazilwood, Wilsonart 7946-38 Matte Finish
- 687 Boardwalk Oak, Wilsonart 7983-38 Fine Velvet Finish
- 683 Portico Teak (Grey), Wilsonart 8210K-28 Gloss Line Finish
- 681 Studio Teak, Wilsonart 7960-16 Casual Rustic Finish
- 680 Walnut Heights, Wilsonart 7965K-12 Soft Grain Finish
- 682 Asian Night, Wilsonart 7949-16 Casual Rustic Finish



**Veneer Selections**


A three character sku identifies each species as well as the standard finish offered. Individual components are priced with standard finish. Special finishes on veneers made to customer specifications are subject to factory approval and a 10% net upcharge with a \$500 net minimum.

Transparent stains and sealers are applied in multiple steps to enhance the beauty of the natural wood. A durable, baked-on, top-coat of conversion varnish

or UV topcoat is applied to protect the product. It is recommended that felt, cork or fabric backed desk pads and accessories are used on worksurfaces to minimize wear.


When specifying light finishes the natural characteristics of the wood will be visible and color will vary. Paint finishes are available as custom orders. See terms and conditions for additional finish information.

**MPL Maple**  
Flat Cut



- Standard Finish  
871 860 861  
837 836 823  
865 805 866  
872 839 845  
870


**OAK Oak**  
Rift Cut



- Standard Finish  
871 870 839  
837 860 861  
865 836 866  
872 805 845

- OAK Select Finishes**  
M73 M72 M75  
M74 M76 M77  
M71

**WLT Walnut**  
Flat Cut



- Standard Finish  
872 861  
870 823  
860 866  
839

**MPL Maple**



- 871 837 865 872 870 860 836 805  
839 861 823 866 845

**OAK Oak**



- 871 837 865 872 870 860 836 805  
839 861 866 845

**OAK Select Finishes**



- M73 Whitewash M74 Fawn M71 Blonde M72 Toast M76 Caramel M75 Smoke M77 Coffee

**Veneer Selections**

WLT Walnut



872



870



860



839



861



823



866

### Powder Coat Selections

A two character sku identifies each powder coat finish offered. Individual skus are priced with standard metal finish. Non-standard finishes may incur an additional charge. The powder coat option is available on skus where noted as an option in the material specification code.

#### Standard Finish

#### Powder Coat Finishes - Upcharges apply. Price varies per table size.



PA Polished Aluminum



WH Satin White



GR Graphite



BZ Bronze



IG Iron Grey



RD Black Red



BK Matte Black

### Optional Powder Coat Colors - RAL

- Lead Time - Three weeks additional lead-time after color approval
- Net Up-charge - \$1000 for colors shown in Bernhardt Design RAL Powder Coat Selector
- Minimum Order Quantity - None
- Approval Sample Cost - None
- Combining Products - One up-charge is applicable for multiple products on a single purchase order when they are in the same color

### Design Selections

#### Edge Styles

##### FH Flat Edge

Veneer and Laminates



##### PH Hudson Plywood Edge

Veneer and Laminates



**Note:** Exposed plywood edge selection will come with 1/2" rounded corners.

### Base Selections

#### CA Casters

2 1/2" Non-Marring Urethane Wheels, 2 Locking Casters

Chrome capped wheels are used on polished bases.

White with grey trim wheels are used on white bases.

All other colors will have black casters.




### Power Finish Selection

#### Dean Surface Power Module

BK Black


GY Grey

WH White



#### PowerBridge Power Module

GY Grey



## Hudson Tables



Hudson tables are designed for use in flexible environments requiring reconfigurations and easy storage. Table options include a rectangular, teleconference and a half-round table. Configurations include but are not limited to u-shape, closed conference and classroom as shown on the right.

Hudson table tops are 1" thick and available in four options: wood veneer, wood veneer with a plywood edge, laminate and laminate with a plywood edge. Grain will run the length of the table in veneer applications. Pre-installed ganging brackets are included for all tables.

The collection offers two styles of aluminum bases: T-base and C-base. T-Bases are positioned in the center of the table with either an edge or an inset mount that allows users to be seated on all sides of the table. C-bases are positioned in the front of the table with a front edge mount only, and users are seated on one side of the table only. Base styles are available with 2½" heavy-duty casters with non-marring urethane wheels.

Aluminum bases are available in a variety of powder coat finishes. See page 7 for powder coat finish selection.

Hudson power options include trough mounted modules and surface power modules. A trough between bases provides a channel for wire management and electrical components. A removable cover located on the inside of the base provides wire management access and conceals cables.

Tables fold and nest for compact storage. Turning a handle, located underneath the table top, in a clockwise motion releases the top to fold. A gas spring allows the top to rest gently when folding or closing.

An optional modesty panel is available for field installation. Clips mount in premachined locations with provided hardware. The modesty panel is hinged to swivel for storage.

SCS Indoor Advantage™ Gold and LEVEL® 2 certified. See terms and conditions for additional environmental information.

## Configuration Options




U-Shaped Configuration



Closed Conference Configuration



Closed Conference Configuration

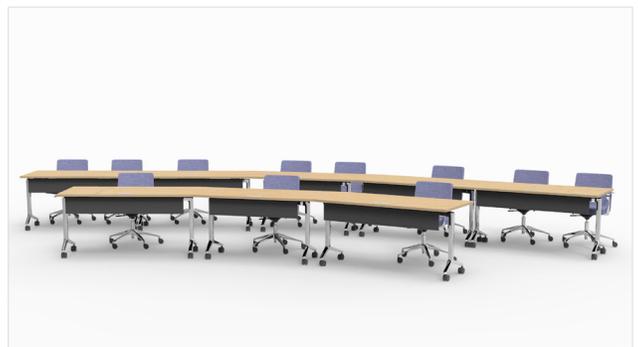

Classroom Configuration

**C-base Design**

The C-base is available in a edge mounted position only. The edge mount allows guests to be seated on one of the long sides of the table with an optional modesty panel installed on the opposite side.

Powder coat finish selections are available for the C-base. See page 7 for powder coat finish selections.


The C-base is available with 2½" heavy duty casters (2 locking, 2 non-locking) with non-marring urethane wheels.

A trough between bases provides a channel for wire management, electrical components and ganging bracket storage. A removable cover located on the inside of the base leg provides wire management access and conceals cables.


An optional modesty panel may be used with C-bases. The modesty panel is hinged to swivel when stored. Specify modesty panels separately.

Passes ANSI/BIFMA X5.5-2014.

C-base



C-base  
Plan View

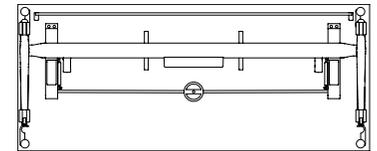


**C-base Storage**


Hudson tables are designed to fold and nest for compact storage. The C-base design allows the top to be folded in an angled vertical position. **When nested, each additional table adds only 8⅞" depth and 1⅞" width for storage.**

Turning a handle, located underneath the table top, in a clockwise motion releases the top to fold. A gas spring allows the top to rest gently when it is either being folded or closed.


Storage Position Front View  
C-base with Optional Modesty Panel




Storage Position Back View  
C-base with Optional Modesty Panel

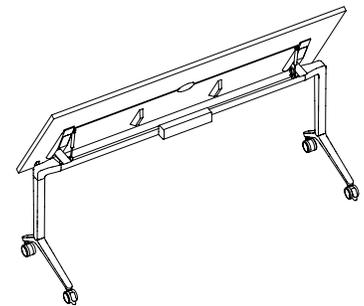


Folded Position  
End View with Optional Modesty Panel

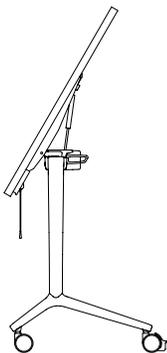

Nested Storage Position  
End View with Optional Modesty Panel

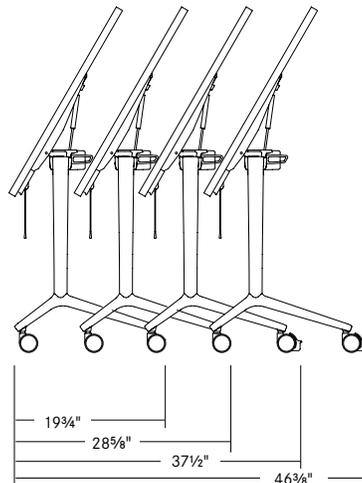

Nested Storage Position  
Back View

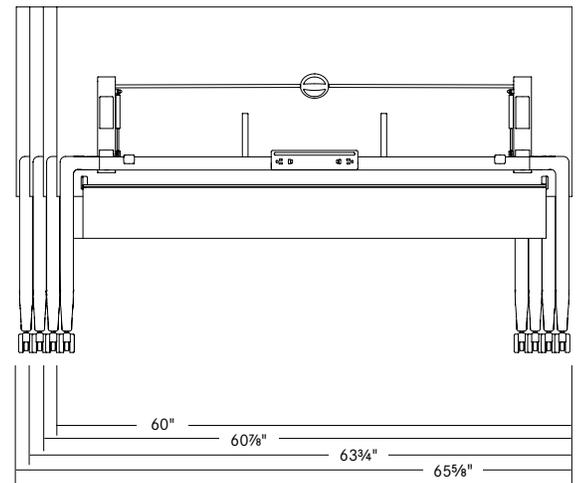

### T-base Design

The T-bases are positioned in either an inset mount or an edge mount. The inset mount allows for guests to be seated on all four sides of the table. The edge mount allows guests to be seated on the two long sides of the table and is designed to provide maximum user leg space in ganging application.

Powder coat finish selections are available for the T-base. See page 7 for powder coat finish selections.


The T-base is available with 2½" heavy duty casters (2 locking, 2 non-locking) with non-marring urethane wheels.

A trough between bases provides a channel for wire management, electrical components and ganging bracket storage. A removable cover located on the outside of the base provides wire management access and conceals cables.

An optional modesty panel may be used with T-bases. The modesty panel is hinged to swivel when stored. Specify modesty panels separately.

Passes ANSI/BIFMA X5.5-2014.


Inset Mount T-base




Edge Mount T-base



Inset Mount T-base Plan View



Edge Mount T-base Plan View




### T-base Storage


Hudson tables are designed to fold and nest for compact storage. The T-base design allows the top to be folded in a vertical position. **When nested, each additional table adds only 6¼" depth and 1⅞" width for storage.**

Turning a handle, located underneath the table top, in a clockwise motion releases the top to fold. A gas spring allows the top to rest gently when it is either being folded or closed.


Storage Position Back View  
Inset Mount T-base




Storage Position Back View  
Edge Mount T-base




Folded Position  
End View with Optional Modesty Panel



Nested Storage Position  
End View with Optional Modesty Panel

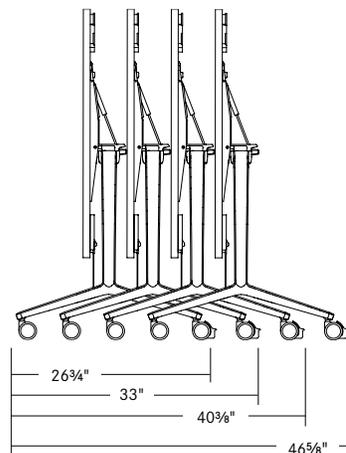

Nested Storage Position  
Back View

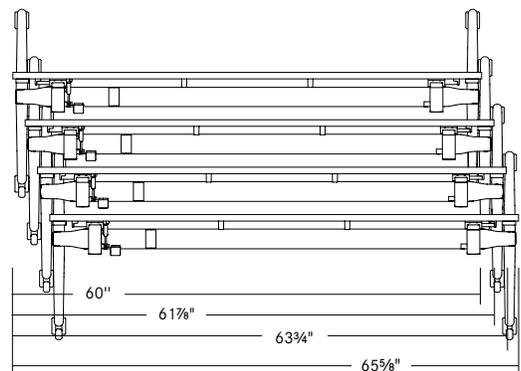


Example shown uses a 60" w Table

## Modesty Panel


Hudson tables are available with a 1/4" thick anodized aluminum modesty panel. Modesty panels are easily installed and removed by the use of hanging in conjunction with pre-machined holes. The panel clips simply insert into the channel. The modesty panels are hinged to swivel for storage. All tables fold and store with the modesty panels installed.

Powder coat finishes are available for the modesty panel, see page 7 for powder coat finish selection.


### C-base with Modesty Panel



### T-base with Modesty Panel




### Hinged Modesty Panel Anodized Aluminum

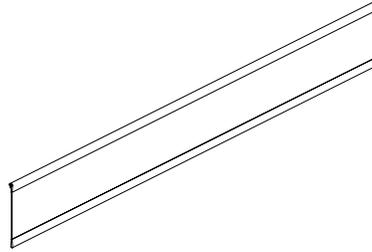

### Attaching the Modesty Panel


Using (2) #8 wood screws, secure modesty panel attachment bracket to table top. Once secured, modesty panel will clip into the channel.

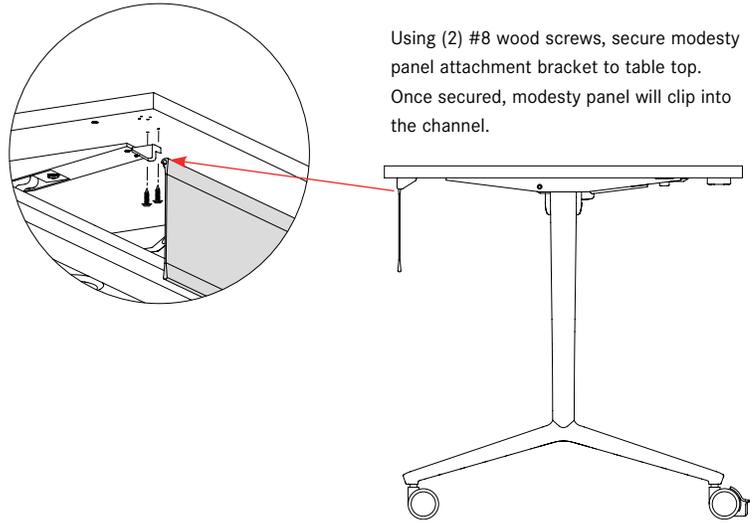

## Ganging Bracket

Hudson tables feature pre-installed ganging brackets making it easier to provide a secure method for connecting tables. Position tables in desired grouping, with table ends touching, then connect the pre-installed ganging brackets. Tables can only be connected at table ends.

### Ganged Bracket

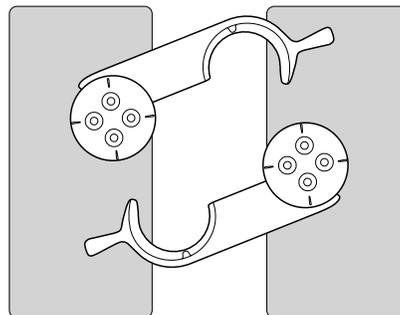

## PowerBridge Power Module


Hudson offers a unique and extremely flexible way to address the power needs of a training table. The Hudson table PowerBridge is a stand-alone power module that snaps into the center of the Hudson wire trough and provides instant power for the table. Having this flexibility provides the opportunity for the PowerBridge to be moved from table to table or to be added after a project has been installed without having to alter the tables in any way. It even gives the end user the ability to take PowerBridge units from one room to another as demand and needs change.

The PowerBridge is offered in a configuration that provides (2) 15 amp receptacles, (2) 2 amp USB-A ports, 10 watt and (2) 2 amp USB-C ports, 20 watt. It can be specified in a 9' braided cord with integrated surge suppressor or with our interlink IQ daisy chain system.

The corded PowerBridge option is UL listed as a Furniture Power Distribution Unit (FPDU) for UL962 and the listing number is E235403.

The interlink IQ PowerBridge options are ETL Listed and UL Recognized as a Furniture Power Distribution Unit (FPDU) for UL962 and the listing number is E315615.

When used with the Hudson T-base configurations the whole table assembly is ETL listed for UL962 as an assembly.

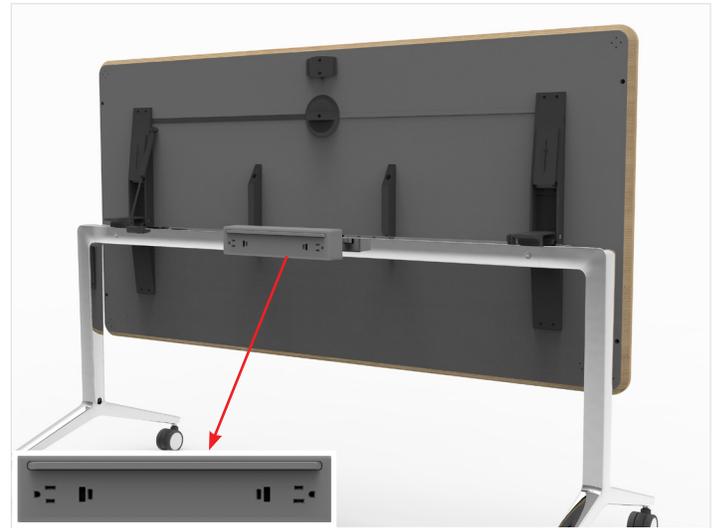


PowerBridge Power Module

## Installation of PowerBridge on Hudson Trough

The PowerBridge is designed to be snapped into place in the center of the wire trough and between the two top supports. This will securely locate the unit and allow for easy plugging and unplugging of power and charging cords. For removal or relocation simply pull up on the tabs on the back of the unit to free it from the trough. **Note: The PowerBridge must be located between the two top supports for the top to fit properly.**

A convenient wire management clip is located in the trough of every table so any wire that is connected to the PowerBridge can be routed through this clip and kept neatly out of the way of the user.

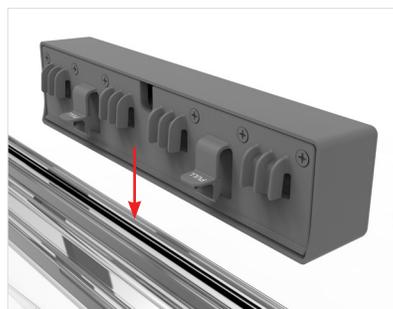

**Step 1:** Align trough mount power module with PowerBridge.



**Step 2:** Clip power module into PowerBridge




Route power cords through wire management clip on the underside of the table top.

**PowerBridge Cable Routing**


**Corded and Daisy Chained**

The PowerBridge power module offers (2) 15 amp receptacles, (2) 2 amp USB-A ports, 10 watt and (2) 2 amp USB-C ports, 20 watt available in both corded and daisy chained. PowerBridge is easily mounted to the Hudson table trough without tools. The corded version features a 9' cotton braided zig zag pattern cord and is UL listed. The daisy chained option features snap fit connectors for ease of connection with a 9' braided cord. To utilize the daisy chained PowerBridge specify a starter unit on the first table and the add-on sku on connection tables. Tables 48" - 60" in width can be daisy chained up to 8 tables (1 starter, 7 add-ons). Tables 66" - 84" can only be daisy chained up to 4 tables (1 starter, 3 add-ons).


PowerBridge is specified separately and installed by the end user.

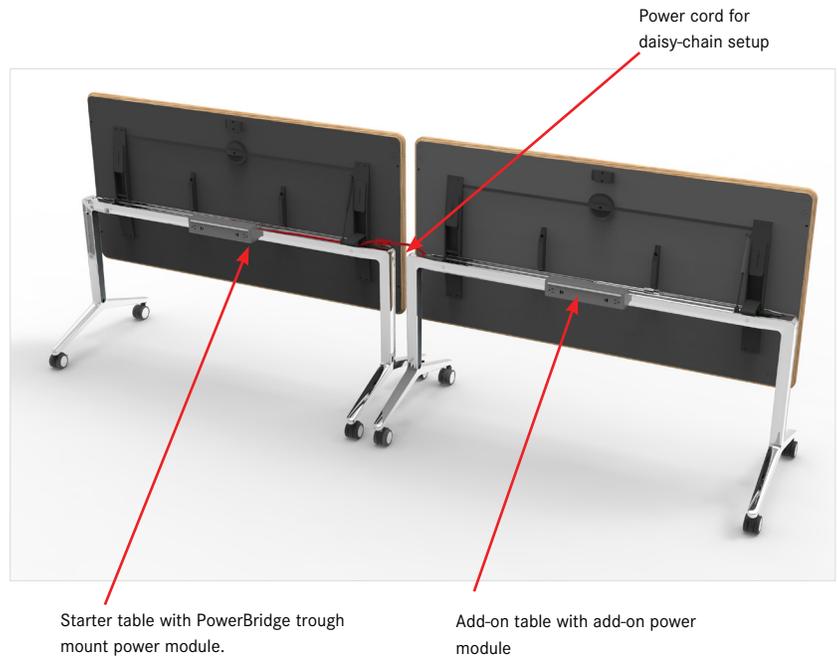

**Corded PowerBridge Cable Routing**

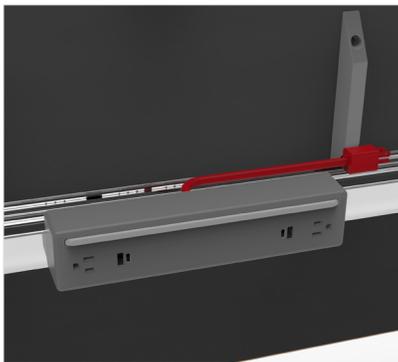

**Step 1:** Locate power cord.

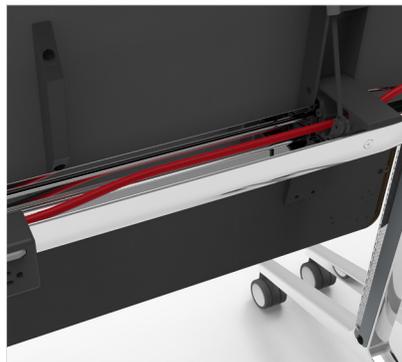

**Step 2:** Route power cord through wire management clips attached to power trough.



**Step 3:** Route power cord down leg and install in floor mount

**PowerBridge Daisy Chain Cable Routing**



**Step 1:** Align male and female sequential connectors.



**Step 2:** Push together connectors and make sure you have a strong connection.



**Step 3:** Route power cord down leg and install in floor mount.


### PowerBridge Power Module

Hudson offers a proprietary PowerBridge trough mount power solution allowing quick and easy daisy chain joining of tables. For the trough mount configurations, up to (8) tables may be connected to a single power infeed.

The PowerBridge power uses a (2) 15 amp receptacles, (1) 2 amp USB-A ports and (2) 2 amp USB-C ports module flush mounted in multiple locations on the table.


A starter PowerBridge must be specified separately to begin a run of tables. This starter unit includes the power module control unit with the 9' grounded plug that connects to the power source. It also provides circuiting allowing add-on tables to be plugged into each other in any order, making set-up and reconfiguration quick and easy. PowerBridge configurations can only be daisy chained with other PowerBridge configurations.

The PowerBridge power unit is UL Listed as a corded assembly. It is UL recognized/ETL Listed as a daisy-chained unit. Both the C-base and T-base assemblies are BIFMA certified. For markets that require it, the **T-base table assemblies** are UL 962 and CSA 22.2 No. 203.2 Listed as assemblies with power.

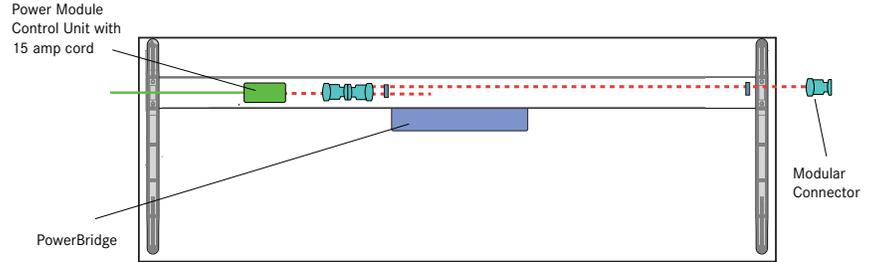


Note: All power specified separately. To specify PowerBridge units see page 28.

#### PowerBridge Grey Finish




Updated Information Shown in RED  
(2) 120 v 60 Hz. 15 amp receptacles  
(2) 2 amp USB-A ports, 10 watt  
(2) 2 amp USB-C ports, 20 watt

#### Modular Connector Matte Black Finish




#### Power Module Control Unit Control Module with 9' Grounded Plug Installed on Starter Tables



15 amp grounded plug

#### Starter Table


Specify PowerBridge RPS

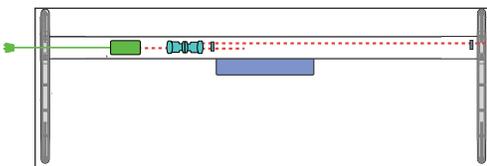

Shown As Left Power Infeed

#### Add-On Table

Specify PowerBridge RPA or RPJ

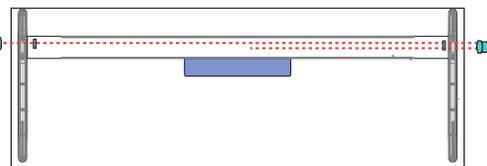

Shown As Left Power Add-On


#### 48" - 60"w Tables:

A maximum of (7) add-on tables is possible for a total of (8) daisy chained tables. Requires PowerBridge RPA add-on unit.

#### 66" - 72"w Tables:

A maximum of (3) add-on tables is possible for a total of (4) daisy chained tables. Requires PowerBridge RPJ add-on unit with jumper included.

### Connecting Tables With PowerBridge Modules

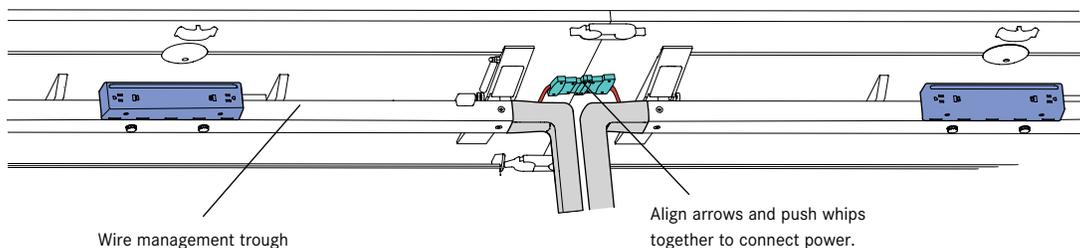

Wire management trough

Align arrows and push whips together to connect power.


**Dean Power Module**

Hudson offers a Dean surface mount power solution allowing quick and easy daisy chain joining of tables. For the surface mount configurations, up to (8) tables may be connected to a single power infeed.

The Dean surface mount power configuration uses a (2) 15 amp receptacles, (1) 2 amp USB-A port and (1) 2 amp USB-C port module flush mounted in multiple locations on the table.

A starter Dean unit must be specified separately to begin a run of tables. This starter table includes the power module control unit with the 9' grounded plug that connects to the power source. It also provides circuiting allowing add-on tables to be plugged into each other in any order, making set-up and reconfiguration quick and easy. Surface mount configurations can only be daisy chained with other surface mount configurations.


The Dean power unit is UL/ETL Listed as a corded assembly. It is UL recognized/ETL Listed as a daisy-chained unit. Both the C-base and T-base assemblies are BIFMA certified. For markets that require it, the **T-base table assemblies** are UL 962 and CSA 22.2 No. 203.2 Listed as assemblies with power.

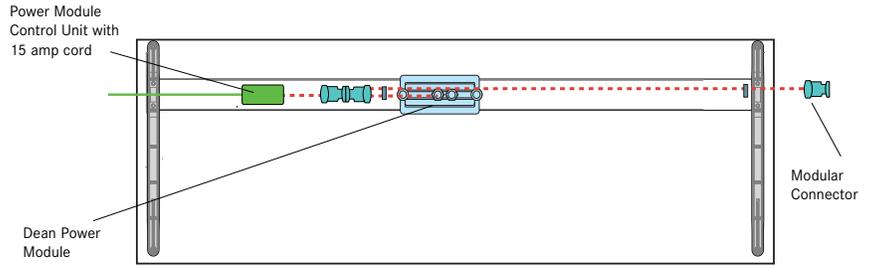

**Note: All power specified separately. To specify Dean units see page 29.**

**Power Module**


Matte Black, White or Grey Finish



(2) 120 v 60 Hz. 15 amp receptacles  
(2) 2 amp USB-C port, 45 watt  
6½" w x 3" d x 2¾" h


**Modular Connector**

Matte Black Finish



**Power Module Control Unit**


Control Module with 9' Grounded Plug  
Installed on Starter Tables



15 amp grounded plug

**Starter Table**


Specify Dean Surface Power Module DPS

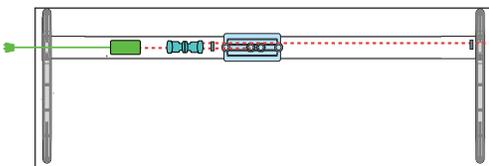

Shown as Left Power Infeed

**Add-On Table**

Specify Dean Surface Power Module DPA or DPJ

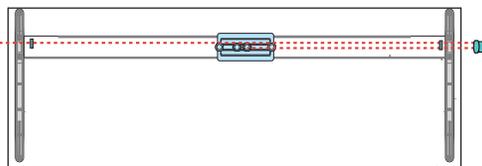

Shown as Left Power Add-On


**48" - 60" w Tables:**

A maximum of (7) add-on tables is possible for a total of (8) daisy chained tables. Requires Dean Surface Power Module DPA add-on unit.

**66" - 72" w Tables:**

A maximum of (3) add-on tables is possible for a total of (4) daisy chained tables. Requires Dean Surface Power Module DPJ add-on unit with jumper included.

**Connecting Tables With Dean Surface Power Modules**

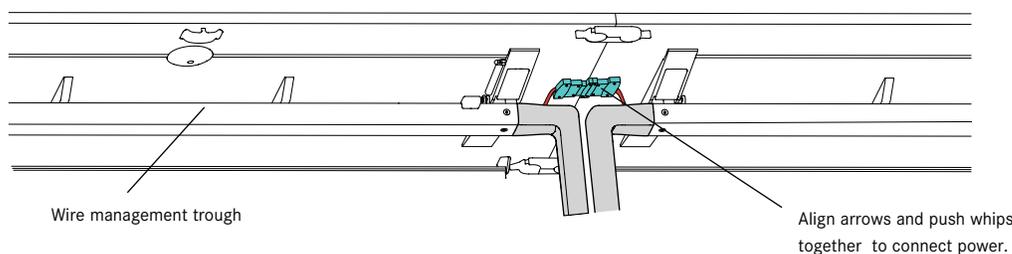


Wire management trough

Align arrows and push whips together to connect power.

**Dean Power Module**



**Dean Power Module**




Dean surface mount power is installed into a work surface to allow the passage of wires through the surface to a power or communication source beneath. Power modules must be specified separately.

Tables with two grommet locations will require two Dean surface mount power units. On a starter table the first power module will be a DPS and the second power module will be a DPA. On an add-on table a DPA unit would be used for both locations.

The exact placement code of the grommet must be specified on the purchase order and cannot be changed or added after an order is acknowledged and entered into production.

Use the codes shown to the right to specify grommet locations.


**Grommet Locations**

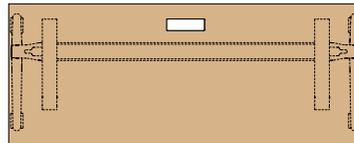


**HCS**  
C-Base - All tops  
Specify Dean grommet separately



**HCD** Not Available on 48" Tops  
Not Available on Teleconference or Half Round Tops  
C-Base - All tops  
Specify Dean grommet separately

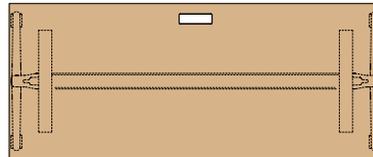

**HTR**  
T-Base - All tops  
Specify Dean grommet separately

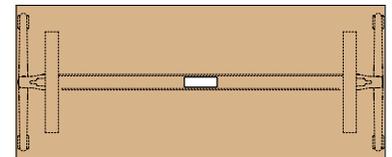

**HTC**  
T-Base - All tops  
Specify Dean grommet separately



**HDR** Not Available on 48" Tops  
Not Available on Teleconference, Half Round Tops or Inset Bases  
T-Base - All tops  
Specify Dean grommet separately

**Configurations + Power**

The configurations below illustrate the number of receptacles in a particular work configuration. The set-ups shown are only some of the many configurations possible. Every situation is unique and should be assessed appropriately.

**Please note that the power source needs to be located within 6' of each starter table. Maximum system wattage usage is 1440 watts (120volts x 12 Amps). If exceeds system circuit breaker will trip. Reset on "brain" unit installed on starter tables.**

- Starter Table
- Add-on Table
- Power Source

**PowerBridge and Single Dean**


A maximum of (8) 48" w - 60" w tables can be daisy chained together when the single, centered power unit option is specified.

A maximum of (4) 66" w - 72" w tables can be daisy chained together when the single, centered power unit option is specified. This is due to a limited cord length which requires an extra jumper for each table. Each jumper, per code, counts as a power unit which reduces the quantity that can be daisy chained.

Dean configurations can only be daisy chained with other Dean configurations. PowerBridge configurations can only be daisy chained with other PowerBridge configurations.


**Large Closed Conference**

Conference set up with (8) 66" w - 72" w tables with surface mount power units, totaling (16) receptacles and (8) dual USB ports. Requires the customer to order (2) starter tables to power the configuration.



**Classroom Seating**

Classroom set up with (24) 48" w - 60" w tables with surface mount power units, totaling (16) receptacles and (8) dual USB ports per row. Requires the customer to order (1) starter table to power a row of (8) tables.

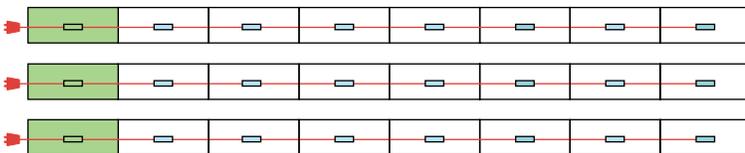

**Small Closed Conference**

Conference set up with (8) 66" w - 72" w tables with surface mount power units, totaling (16) receptacles and (8) dual USB ports. Requires the customer to order (2) starter tables to power the configuration.




**Dual Dean Surface Power Module**

A maximum of (4) tables can be daisy chained together when the dual surface mount power option is specified.

Dual module configurations can only be daisy chained with other dual module configurations.


**Large Closed Conference**

Conference set up with (8) tables with Dean power units, totaling (16) receptacles and (8) dual USB ports. Requires the customer to order (2) starter tables to power the configuration.




**Classroom Seating**

Classroom set up with (18) tables with Dean power units, totaling (12) receptacles and (6) dual USB ports per row. Requires the customer to order (6) starter tables to power the configuration.

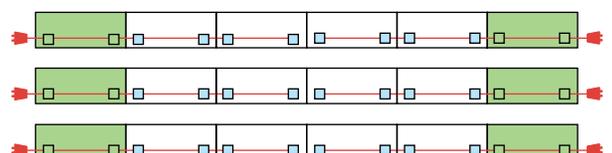

**Small Closed Conference**

Conference set up with (8) tables with Dean power units, totaling (16) receptacles and (8) dual USB ports. Requires the customer to order (2) starter tables to power the configuration.





tables



**c-base - standard + communication grommet**

folding table with polished aluminum base  
pre-installed ganging brackets  
PowerBridge and Dean power module available  
plywood tops have a 1½" radius edge  
specify modesty panel separately

**specify grommet location when ordering Dean power module, see page 16 for grommet codes.**  
**specify PH edge code for exposed plywood edge laminate and veneer tops**

	sku	w	d	h	weight	laminates		veneer	
						solid WGL woodgrain	w/plywood edge WGL woodgrain	maple OAK oak WLT walnut	maple OAK oak WLT walnut
<b>c-base</b> 	YCA	48	24	29	80	\$ 2666	\$ 3326	\$ 3688	\$ 4193
	YCB	54	24	29	85	2774	3397	3760	4266
	YCC	60	24	29	90	2884	3471	3831	4338
	YCD	66	24	29	95	2995	3542	3904	4409
	YCE	72	24	29	100	3105	3615	3977	4481
	YCH	48	30	29	90	2995	3688	3831	4266
	YCI	54	30	29	95	3089	3760	3904	4338
	YCJ	60	30	29	100	3178	3831	3977	4409
	YCK	66	30	29	105	3272	3904	4048	4481
	YCL	72	30	29	110	3358	3977	4120	4555

specification codes example: HDS-SKU-FH000

series	sku	edge	grommet location
HUDSON		FH 1" flat PH 1" exposed plywood	for Dean power mount - see page 16 000 none or PowerBridge
H   D   S   -	-		

material + finish code example: BK CHY 805

base finish	top material	top finish
PA polished aluminum powder coat upcharge \$275 WH satin white powder coat GR graphite powder coat BZ bronze powder coat IG iron grey powder coat RD black red powder coat BK matte black powder coat	PLL solid laminate WGL woodgrain laminate MPL maple OAK oak WLT walnut	see pages 4-5




**t-base edge - standard + communication grommet**

folding table with polished aluminum base  
pre-installed ganging brackets  
PowerBridge and Dean power module available  
plywood tops have a 1½" radius edge  
specify modesty panel separately  
\*T-base power listing noted at the bottom  
**specify grommet location when ordering Dean power module, see page 16 for grommet codes.**  
**specify PH edge code for exposed plywood edge laminate and veneer tops**

sku	w	d	h	weight	laminates	laminates w/plywood edge	veneer	veneer w/plywood edge
					PLL solid WGL woodgrain	PLL solid WGL woodgrain	MPL maple OAK oak WLT walnut	MPL maple OAK oak WLT walnut
<b>t-base edge</b>								
YTC	48	27	29	90	\$ 2884	\$ 3615	\$ 3433	\$ 4158
YTD	54	27	29	95	2958	3688	3507	4230
YTE	60	27	29	100	3032	3760	3580	4302
YTF	66	27	29	105	3105	3831	3653	4373
YTG	72	27	29	110	3178	3904	3724	4446
YTH	48	30	29	90	2995	3724	3542	4266
YTI	54	30	29	95	3067	3796	3615	4338
YTJ	60	30	29	100	3141	3869	3688	4409
YTK	66	30	29	105	3214	3941	3760	4481
YTL	72	30	29	110	3286	4013	3831	4555
YTO	60	36	29	110	3358	4084	3904	4627
YTP	66	36	29	115	3431	4158	3977	4700
YTQ	72	36	29	120	3505	4230	4058	4770

t-base edge



**\*Note:** T-base tables are listed as an assembly in accordance with UL962 and CSA 222 No. 203.2 utilizing both the PowerBridge and Dean power units.

specification codes example: HDS-SKU-FH000

series	sku	edge	grommet location
HUDSON		FH 1" flat PH 1" exposed plywood	for Dean power mount - see page 16 000 none or PowerBridge
H   D   S   -	-		

material + finish code example: BK CHY 805

base finish	top material	top finish
PA polished aluminum powder coat upcharge \$275 WH satin white powder coat GR graphite powder coat BZ bronze powder coat IG iron grey powder coat RD black red powder coat BK matte black powder coat	PLL solid laminate WGL woodgrain laminate MPL maple OAK oak WLT walnut	see pages 4-5



**t-base inset - standard + communication grommet**

folding table with polished aluminum base  
 pre-installed ganging brackets  
 PowerBridge and Dean power module available  
 plywood tops have a 1½" radius edge  
 specify modesty panel separately  
 \*T-base power listing noted at the bottom  
**specify grommet location when ordering Dean power module, see page 16 for grommet codes.**  
**specify PH edge code for exposed plywood edge laminate and veneer tops**

sku	w	d	h	weight	specifications	laminates	laminates w/plywood edge	veneer	veneer w/plywood edge
						PLL solid WGL woodgrain	PLL solid WGL woodgrain	MPL maple OAK oak WLT walnut	MPL maple OAK oak WLT walnut
<b>t-base inset</b>									
YTW	60	30	29	100	legs inset 10¼" from edge	\$ 3141	\$ 3869	\$ 3688	\$ 4409
YTX	66	30	29	105	legs inset 11¼" from edge	3214	3941	3760	4481
YTY	72	30	29	110	legs inset 15¼" from edge	3286	4013	3831	4555
YTZ	78	30	29	115	legs inset 15¼" from edge	3359	4085	3905	4628
YTS	84	30	29	120	legs inset 15¼" from edge	3435	4158	3995	4706
YTT	72	36	29	120	legs inset 15¼" from edge	3505	4230	4048	4770
YTU	78	36	29	125	legs inset 15¼" from edge	3578	4302	4120	4844
YTV	84	36	29	130	legs inset 15¼" from edge	3651	4373	4193	4917



**\*Note:** T-base tables are listed as an assembly in accordance with UL962 and CSA 222 No. 203.2 utilizing both the PowerBridge and Dean power units.

specification codes example: HDS-SKU-FH000

series	sku	edge	grommet location
HUDSON		FH 1" flat PH 1" exposed plywood	for Dean power mount - see page 16 000 none or PowerBridge
H   D   S   -	-		

material + finish code example: BK CHY 805

base finish	top material	top finish
PA polished aluminum powder coat upcharge \$275 WH satin white powder coat GR graphite powder coat BZ bronze powder coat IG iron grey powder coat RD black red powder coat BK matte black powder coat	PLL solid laminate WGL woodgrain laminate MPL maple OAK oak WLT walnut	see pages 4-5




**c-base inset half round**

folding table with polished aluminum base  
pre-installed ganging brackets  
PowerBridge and Dean power module available  
plywood tops have a 1½" radius edge  
specify modesty panel separately

**specify grommet location when ordering Dean power module, see page 16 for grommet codes.**  
**specify PH edge code for exposed plywood edge laminate and veneer tops**

	sku	w	d	h	weight	laminates		veneer	
						solid WGL woodgrain	w/plywood edge WGL woodgrain	maple OAK oak WLT walnut	maple OAK oak WLT walnut
<b>c-base inset half round</b>	YDD	54	26	29	95	\$ 2995	\$ 3615	\$ 3977	\$ 4481
	YDC	60	26	29	100	3105	3688	4048	4555
	YDB	66	26	29	105	3214	3760	4120	4627
	YDA	72	26	29	110	3322	3831	4193	4700
	YDI	54	30	29	95	3307	3977	4120	4555
	YDH	60	30	29	100	3395	4048	4193	4627
	YDG	66	30	29	105	3489	4120	4266	4700
	YDF	72	30	29	110	3578	4193	4338	4770

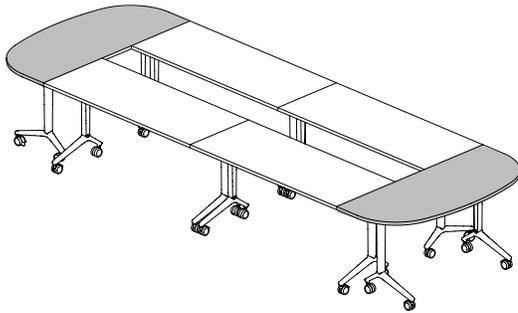

specification codes example: HDS-SKU-FH000

series	sku	edge	grommet location
HUDSON		FH 1" flat PH 1" exposed plywood	for Dean power mount - see page 16 000 none or PowerBridge
H   D   S   -	-		

material + finish code example: BK CHY 805


base finish	top material	top finish
PA polished aluminum powder coat upcharge \$275 WH satin white powder coat GR graphite powder coat BZ bronze powder coat IG iron grey powder coat RD black red powder coat BK matte black powder coat	PLL solid laminate WGL woodgrain laminate MPL maple OAK oak WLT walnut	see pages 4-5



**c-base inset teleconference**

folding table with polished aluminum base  
pre-installed ganging brackets  
PowerBridge and Dean power module available  
plywood tops have a 1½" radius edge  
specify modesty panel separately  
**specify grommet location when ordering Dean power module, see page 16 for grommet codes.**  
**specify PH edge code for exposed plywood edge laminate and veneer tops**

	sku	w	d	h	weight		laminates	laminates w/plywood edge	veneer	veneer w/plywood edge
							PLL solid WGL woodgrain	PLL solid WGL woodgrain	MPL maple OAK oak WLT walnut	MPL maple OAK oak WLT walnut
<b>c-base inset teleconference</b>	YC1	64¼"	26"	29"	100	for use with 24" tables	\$ 3105	\$ 3688	\$ 4048	\$ 4555
	YC2	70¼"	26"	29"	105	for use with 24" tables	3214	3760	4120	4627
	YC3	76½"	26"	29"	110	for use with 24" tables	3322	3831	4193	4700
	YC4	64¾"	30"	29"	100	for use with 30" tables	3431	4048	4193	4627
	YC5	70¾"	30"	29"	105	for use with 30" tables	3489	4120	4266	4700
	YC6	76¾"	30"	29"	110	for use with 30" tables	3578	4193	4338	4770

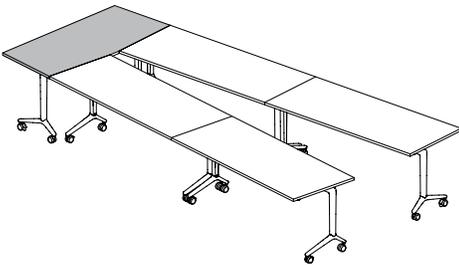

specification codes example: HDS-SKU-FH000

series	sku	edge	grommet location
hudson		FH 1" flat PH 1" exposed plywood	for Dean power mount - see page 16 000 none or PowerBridge
H   D   S   -	-		

material + finish code example: BK CHY 805

base finish	top material	top finish
PA polished aluminum powder coat upcharge \$275 WH satin white powder coat GR graphite powder coat BZ bronze powder coat IG iron grey powder coat RD black red powder coat BK matte black powder coat	PLL solid laminate WGL woodgrain laminate MPL maple OAK oak WLT walnut	see pages 4-5




**t-base inset teleconference**

folding table with polished aluminum base  
pre-installed ganging brackets  
PowerBridge and Dean power module available  
plywood tops have a 1½" radius edge  
specify ganging brackets and modesty panel separately  
\*T-base power listing noted at the bottom

**specify grommet location when ordering Dean power module, see page 16 for grommet codes.**

	sku	w	d	h	weight		laminates	laminates w/plywood edge	veneer	veneer w/plywood edge
							PLL solid WGL woodgrain	PLL solid WGL woodgrain	MPL maple OAK oak WLT walnut	MPL maple OAK oak WLT walnut
<b>t-base inset teleconference</b>	YT1	65½"	32"	29"	100	for use with 27" or 30" tables	\$ 3358	\$ 4084	\$ 3904	\$ 4627
	YT2	71½"	32"	29"	105	for use with 27" or 30" tables	3431	4158	3977	4700
	YT3	77"	32"	29"	110	for use with 27", 30" or 36" tables	3505	4230	4048	4770
	YT4	65½"	36"	29"	110	for use with 27" or 30" tables	3578	4302	4120	4844
	YT5	71½"	36"	29"	115	for use with 27" or 30" tables	3651	4373	4193	4917
	YT6	77¾"	36"	29"	120	for use with 27", 30" or 36" tables	3724	4446	4266	4989

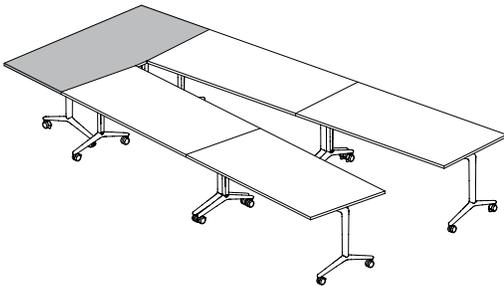

**\*Note:** T-base tables are listed as a assembly in accordance with UL962 and CSA 222 No. 203.2 utilizing both the PowerBridge and Dean power units.

specification codes example: HDS-SKU-FH000

series	sku	edge	grommet location
HUDSON		FH 1" flat PH 1" exposed plywood	for Dean power mount - see page 16 000 none or PowerBridge
H   D   S   -	-		

material + finish code example: BK CHY 805


base finish	top material	top finish
PA polished aluminum powder coat upcharge \$275 WH satin white powder coat GR graphite powder coat BZ bronze powder coat IG iron grey powder coat RD black red powder coat BK matte black powder coat	PLL solid laminate WGL woodgrain laminate MPL maple OAK oak WLT walnut	see pages 4-5

corner worksurface




use with rectangular tables  
 mounting hardware included  
 plywood tops have a 1½" radius edge  
 specify PH edge code for exposed plywood edge laminate and veneer tops

	sku	w	d	h	weight		laminates	laminates w/plywood edge	veneer	veneer w/plywood edge
							PLL solid WGL woodgrain	PLL solid WGL woodgrain	MPL maple OAK oak WLT walnut	MPL maple OAK oak WLT walnut
<b>corner worksurface</b>	YRH	24	24	1	30	for use with 24" tables	\$ 1447	\$ 1790	\$ 2204	\$ 2643
	YRG	27	27	1	35	for use with 27" tables	1483	1833	2223	2666
<b>round edge</b>	YRF	30	30	1	40	for use with 30" tables	1519	1878	2243	2691
	YRE	36	36	1	45	for use with 36" tables	1590	1966	2283	2740

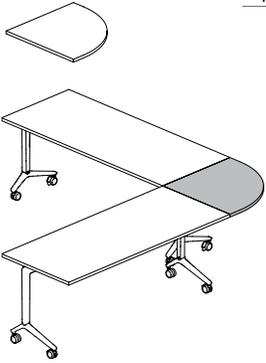

<b>corner worksurface</b>	YFH	24	24	1	30	for use with 24" tables	1447	1790	2204	2643
	YFG	27	27	1	35	for use with 27" tables	1483	1833	2223	2666
<b>flat edge</b>	YFF	30	30	1	40	for use with 30" tables	1519	1878	2243	2691
	YFE	36	36	1	45	for use with 36" tables	1590	1966	2283	2740

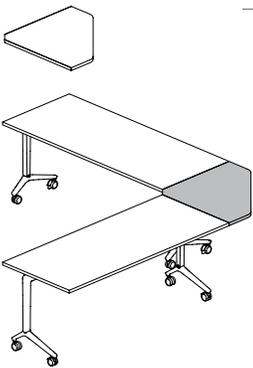

specification codes example: HDS-SKU-FH

series	sku	edge
HUDSON		FH 1" flat PH 1" exposed plywood
H   D   S   -		

material + finish code example: CHY 805

top material	top finish
PLL solid laminate WGL woodgrain laminate MPL maple OAK oak WLT walnut	see pages 4-5



**aluminum modesty panels**

bright anodized aluminum panel  
mounting clips included  
tops are premachined to locate panels  
specify finish codes

	sku	w	d	h	weight	specifications	price
	MPF	38½	¼	7½	4	use with 60"w inset T-base table, 60"w T-base teleconference	\$ 429
	MPA	40%	¼	7½	4	use with 48"w T-base edge, 48"w C-base standard, 54"w inset half round C-base, 60"w inset half round C-base, 60" C-base teleconference, 72"w inset T-base table, 72"w T-base teleconference	429
	MPG	42½	¼	7½	4	use with 66"w inset T-base table, 66"w T-base teleconference	448
	MPB	46%	¼	7½	4	use with 54"w T-base edge, 54"w C-base standard, 66"w C-base teleconference, 66"w inset half round C-base, 78"w inset T-base table,	448
	MPC	52%	¼	7½	4	use with 60"w T-base edge, 60"w C-base standard, 72"w inset half round C-base, 72"w C-base teleconference, 84"w inset T-base table	488
	MPD	58%	¼	7½	5	use with 66"w T-base edge, 66"w C-base standard	488
	MPE	64%	¼	7½	5	use with 72"w T-base edge, 72"w C-base standard	509

specification codes example: HDS-YCE

series	sku
hudson	
H   D   S   -	





**modesty panel finish**

- PA polished aluminum
- powder coat upcharge \$50**
- WH satin white powder coat
- GR graphite powder coat
- BZ bronze powder coat
- IG iron grey powder coat
- RD black red powder coat
- BK matte black powder coat

--







power + accessories

description	sku	w	d	h	weight	specifications	price
<b>PowerBridge power module</b>  <b>Updated Information Shown in RED</b> (2) 120v 60 Hz. 15 amp receptacles (2) 2 amp USB-A ports, 10 watt (2) 2 amp USB-C ports, 20 watt grey finish, UL Listed Furniture Power Distribution Unit (FDU) Listing No. E235403 for UL962A	RPP	12	2	2½		single 9' braided cord + plug 	\$ 1104
	<b>for use on single PowerBridge ganged tables 48" - 60" wide - maximum of (8) units ganged</b>						
 <b>Updated Information Shown in RED</b> (2) 120v 60 Hz. 15 amp receptacles (2) 2 amp USB-A ports, 10 watt (2) 2 amp USB-C ports, 20 watt grey finish, UL Listed Furniture Power Distribution Unit (FDU) Listing No. E235403 for UL962A	RPS	12	2	2½		for starter PowerBridge unit, 60" cord includes brain unit with 9' cord 	2220
	RPA	12	2	2½		for add-on PowerBridge unit 60" cord 	1355
<b>for use on single PowerBridge ganged tables 66" - 84" wide - maximum of (4) units ganged</b>							
 <b>Updated Information Shown in RED</b> (2) 120v 60 Hz. 15 amp receptacles (2) 2 amp USB-A ports, 10 watt (2) 2 amp USB-C ports, 20 watt grey finish, UL Listed Furniture Power Distribution Unit (FDU) Listing No. E235403 for UL962A	RPL	12	2	2½		for starter PowerBridge unit, 60" cord includes brain unit with 9' cord include 24" jumper 	2388
	RPJ	12	2	2½		for add-on PowerBridge unit 60" cord, includes 24" jumper 	1515
<b>for use on single PowerBridge before corner tops - maximum of (4) units ganged</b>							
 <b>Updated Information Shown in RED</b> (2) 120v 60 Hz. 15 amp receptacles (2) 2 amp USB-A ports, 10 watt (2) 2 amp USB-C ports, 20 watt grey finish, UL Listed Furniture Power Distribution Unit (FDU) Listing No. E235403 for UL962A	RPC	12	2	2½		for starter PowerBridge unit, 60" cord includes brain unit with 9' cord includes 60" jumper 	2425
	RPD	12	2	2½		for add-on PowerBridge unit 60" cord, includes 60" jumper 	1553

specification codes example: ACS-SKU


series	sku
accessories	
A   C   S   -	

description	sku	w	d	h	weight	specifications	price
<b>Dean surface power module</b>  (2) 120v 60 Hz. 15 amp receptacles (2) 2 amp USB-C port, 45 watt specify finish: black, white or grey UL Listed Listing No. E235403 for UL962A Furniture Power Distribution Unit (FDU)	DPP	6½	2¼	2½		single 9' braided cord + plug 	\$ 1012
	<b>for use on single Dean ganged tales 48" - 60" wide - maximum of (8) units ganged</b> <b>for use on dual Dean ganged tales 48" - 84" wide - maximum of (4) units ganged</b>						
 (2) 120v 60 Hz. 15 amp receptacles (2) 2 amp USB-C port, 45 watt specify finish: black, white or grey UL Listed Listing No. E235403 for UL962A Furniture Power Distribution Unit (FDU)	DPS	6½	2¼	2½		for starter Dean unit, 60" cord includes brain unit with 9' cord 	1816
	DPA	6½	2¼	2½		for add-on Dean unit, 60" cord 	1204
<b>for use on single Dean ganged tales 66" - 84" wide - maximum of (4) units ganged</b>							
 (2) 120v 60 Hz. 15 amp receptacles (2) 2 amp USB-C port, 45 watt specify finish: black, white or grey UL Listed Listing No. E235403 for UL962A Furniture Power Distribution Unit (FDU)	DPL	6½	2¼	2½		for starter Dean unit, 60" cord includes brain unit with 9' cord includes 24" jumper 	1970
	DPJ	6½	2¼	2½		for add-on Dean unit 60" cord, includes 24" jumper 	1355
<b>for use on single Dean before corner tops - maximum of (4) units ganged</b>							
 (2) 120v 60 Hz. 15 amp receptacles (2) 2 amp USB-C port, 45 watt specify finish: black, white or grey UL Listed Listing No. E235403 for UL962A Furniture Power Distribution Unit (FDU)	DPC	6½	2¼	2½		for starter Dean unit, 60" cord includes brain unit with 9' cord includes 60" jumper 	2007
	DPD	6½	2¼	2½		for add-on Dean unit 60" cord, includes 60" jumper 	1515


specification codes example: ACS-SKU

series	sku
accessories	
A   C   S   -	

finish
BK Black
WH White
GY Grey

	description	sku	w	d	h	weight	specifications	price
	<p><b>ganging brackets</b> molded nylon kit of (4) brackets for each table</p>	GNG	6½	2	5/8	1		\$ 210
	<p><b>cable clamp</b>  for underside of table (4) clips per package grey finish</p>	E5E	1	1	7/8	1		83

specification codes example: ACS-SKU



**Prices and Specifications**

Prices and specifications are subject to change without notice. All prices quoted will be FOB our factories. If applicable, sales tax will be based on ship-to destination.

Bernhardt Design reserves the right to make changes in dimensions, construction, price lists, or product literature without prior notice.

All measurements and weights are approximate and subject to change without notice.

**Order Entry**

All orders are subject to final acceptance by Bernhardt Design in Lenoir, NC. Receipt of our acknowledgment indicates acceptance of your order subject to the terms set forth on the acknowledgment.

Bernhardt Design attempts to clarify all purchase orders. However, in the event the price list number and description on the purchase order differ, the price list number will prevail.

**Changes/Cancellation**

All orders in production are considered firm orders and are not subject to changes or cancellation.

**Shipping**

Bernhardt Design will ship in accordance with customer instructions whenever possible. For convenience, Bernhardt Design offers a guaranteed freight program (GFP). Bernhardt Design will exercise our best judgment in selecting a carrier under our GFP. When selecting a carrier, Bernhardt Design will make our best effort to meet requested delivery dates.

Transportation lead-times and delays including equipment problems, weather, general traffic, traffic accidents, customer warehouse space, labor disputes, customer changes, etc., that occur on a carrier will not be the responsibility of Bernhardt Design. Furthermore, Bernhardt Design will not be responsible for additional costs incurred due to aforementioned delays.

For customers who decline our GFP, Bernhardt Design will stage orders for pick up at 1% of the list price, or \$75 minimum.

Customer orders in production will be shipped as scheduled and will not be held. Bernhardt Design reserves the right to make partial shipments on any order, unless notified otherwise by the customer.

High quality cartoning meeting trucking and railroad specifications is standard at no extra charge. Some items may be blanket wrapped for shipment.

**Freight Damage and Claims**

Bernhardt Design is not liable for any damages to products that occur during transit or storage. The carrier assumes all responsibility upon acceptance of product. It is the customer's responsibility to inspect products upon receipt and file any claims with the carrier. No product should be refused. If products are received damaged, a written exception should be made on the bill of lading and an immediate inspection be requested of the carrier.

Concealed damage must be reported to the carrier within 10 business days from date of delivery. Failure to make claims shall constitute acceptance of the products and waiver any claims of defects, errors or shortages. In the event delivery is made on a Bernhardt Design truck, the products should be carefully inspected for transit damage. If contents are damaged, the driver should be notified to call his dispatcher for immediate disposition.

Concealed damage must be reported within 10 business days from date of delivery and product/packaging held for inspection by a Bernhardt Design representative. Replacements for product damaged in shipment or storage will be manufactured upon receipt of a purchase order.

**Returns**

No merchandise may be returned to Bernhardt Design without written consent in the form of a Return Authorization from our Quality Assurance Department stating why item is being returned and how item will be shipped.

Unauthorized returns will be automatically refused by our receiving department as well as returns not in accordance with Bernhardt Design shipping instructions. Liability for defective merchandise shall be limited to the replacement or repair of that merchandise, and Bernhardt Design shall not be liable for other damages or losses.

**Terms and Credit**

Pricing and terms of sale apply to orders accepted by Bernhardt Design, and no terms, stipulations, or conditions contained in the dealer's submitted purchase orders shall have any force or effect. Bernhardt Design requires a completed and signed credit application from every dealer.

Bernhardt Design also requires dealers to provide a Blanket Certificate of Resale/Use containing valid sales tax exemption number(s) for their respective state(s).

If credit has been approved, the standard terms for all Bernhardt Design products are Net 30 from the invoice date. In certain instances, as an additional condition of order acceptance, buyer may be required to provide a deposit at time of order and/or remit the balance before shipment is released. If credit has not been approved, a 100% prepayment, including any freight charges, is required prior to production.

Acceptable forms of payment include a certified check or electronic bank transfer. For information on where to send check/electronic bank information contact our Financial Services Department. If a dealer or company check is submitted, three (3) weeks should be allowed for the clearance of the check. If electronic bank transfer is submitted, one (1) week should be allowed for the clearance of the electronic bank transfer. The order is subject to cancellation if payment in full is not received within three (3) weeks from the acknowledgment date.

The dealer may not make deductions for advertising, promotions, quality problems, freight, or any other reason without prior authorization by Bernhardt Design. Such a deduction could result in the curtailment or suspension of further shipments until the matter is resolved.

Delinquency notices are generated and mailed periodically. Service charges of 18% per annum will be added to each past-due transaction. Unpaid service charges will be accrued and invoiced on a periodic basis. Past-due notices may result in orders being held until the situation is resolved.

This credit hold could prevent orders from being placed into production or shipped. Orders not in production that are placed on credit hold for three (3) weeks will be subject to cancellation.

Severe past-due situations may result in the employment of a collection agency or other collection litigation. If any collection activity is necessary regarding a dealer account, the dealer will be responsible for the payment of any and all attorney and collection agency fees.

A slow payment history may result in reducing or eliminating an open line of credit. At the discretion of Bernhardt Design, amounts owed by a dealer to Bernhardt Design arising from any transaction or dealings between the dealer and Bernhardt Design may be offset against any amounts owed to the dealer by Bernhardt Design.

#### Warranty

Bernhardt Design will repair or replace, at its discretion, any product or part thereof which fails as the result of defects in material and workmanship, under single shift use and normal care for five years from date of shipment. This warranty shall apply only to the original purchaser.

This warranty does not cover normal wear and tear, misuse or abuse of product, dramatic temperature changes, exposure to unusual conditions or damages incurred by contact with seating products, tables, desks or other surfaces. Natural color changes, variations or movements in lumber or veneer products, exposure to extreme temperature changes and direct sunlight may cause color changes and/or surface damage. These are circumstances beyond the control of Bernhardt Design and are not warranty issues. Repair or replacement of discontinued product will be at the discretion of Bernhardt Design.

This warranty is the customer's exclusive remedy for product defect and does not apply to damage caused by a freight carrier, dealer, installer, user modification, attachments to a product, or any third party. Bernhardt Design has the exclusive right to make the final determination of product misuse or abuse. Except as stated above, Bernhardt Design makes no express or implied warranties as to any product, and in particular, makes no warranty of merchantability or of fitness for any particular purpose. Bernhardt Design shall not be liable for any consequential or incidental damages or for commercial loss arising from any product defect.

#### Operational Parts Warranty

Drawer glides, drawer boxes, drawer pulls, and lock mechanisms have a Life-Time Warranty for original purchaser. Power and communication components are warranted for one year.

#### Parts Order

Bernhardt Design parts have a \$25 net minimum per order. This does not include freight costs.

#### Custom Design

Bernhardt Design may alter products to meet specific needs. Contact your local sales representative when a custom design is needed. Custom designs,

if approved, require minimum quantities, additional leadtime and upcharges.

A custom job number, available from your Bernhardt Design sales representative, must be submitted with purchase orders. Orders combining custom design with standard product cannot be scheduled for production until custom items are approved. Custom design orders are not subject to revision or cancellation after acknowledgment.

#### Wood Finishes

Bernhardt Design tables are available in finishes that are compatible with credenzas and seating finishes. However, finishes on tables may vary slightly from those on seating due to the natural characteristics of the wood. No absolute match is implied or guaranteed.

#### Light Finishes

Bernhardt Design offers lighter finishes on certain veneers and solid woods. When specifying light finishes the natural characteristics of the wood will be

visible and color will vary. Natural characteristics include the natural discolorations of the wood substance and color variations in glued up stock. These natural characteristics are not considered defects by Bernhardt Design, and therefore merchandise will not be replaced.

#### Special Finishes

Special finishes, made to customer specifications and subject to factory approval, may be available at a 10% net upcharge with a \$500 net minimum.

Additional leadtime may be required for special finish items. Special finish orders will not be acknowledged until the special finish sample is approved in writing and received by Bernhardt Design Customer Service. Special finish orders are not subject to revision or cancellation after acknowledgment.

#### Installation and Maintenance

All freestanding tables and credenzas are equipped with leveling devices. Local floor conditions vary, and it is always necessary to properly adjust leveling devices. Proper leveling is essential to the alignment and function of doors and drawers.

Improperly leveled units result in misaligned doors and drawers and may impair locking mechanisms or other functional hardware. After the initial installation of credenzas, it may be necessary to readjust and align the units to compensate for settling. This should be expected as a matter of routine maintenance and follow-up to assure proper case function.

Proper installation of Bernhardt Design tables and credenzas is the responsibility of the dealer. Improperly installed units can result in permanent damage to case components. Damage due to improperly installed furniture not covered under product warranty.

Orders combining custom design with standard product cannot be scheduled for production until custom items are approved. Custom design orders are not subject to revision or cancellation after acknowledgment.

#### Care and Cleaning

Finished wood surfaces should be cleaned with a soft damp cloth, wiping in the direction of the grain. Furniture should be buffed dry immediately with a soft cloth.

#### Design and Patent Rights

All of the products shown in Bernhardt Design catalogs and described in Bernhardt Design price lists are, and remain, the property of Bernhardt Design, with the sole right reserved to manufacture and to distribute.

Some of the product designs shown are patented in the United States and will remain the property of Bernhardt Design. Any reproduction of the products constitutes an infringement of patented copyright laws and will be subject to prosecution.

#### Environmental

Some tables and credenzas are LEVEL® for ANSI/BIFMA e3-2019 – Furniture Sustainability Standard and SCS Indoor Advantage™ Gold certified. Visit the product page at [bernhardtdesign.com](http://bernhardtdesign.com) for certifications.

**Preferred Carrier Guaranteed Freight Rates**

Freight charges will be applied to orders as a separate line item based on the zones listed. Rates are based on zones with a minimum for each zone. All zones are located within the Continental United States.

The freight amount is calculated on the total merchandise list COM price. Additional freight fuel surcharges may apply. Rates are based on deliveries made Monday through Friday, 8 am until 5 pm.

All orders are shipped by Bernhardt Design company trucks or preferred carriers specified by Bernhardt Design. **If a purchase order does not specify that the product must ship complete, Bernhardt Design reserves the right to select the most effective shipping method necessary, including split shipments.** Dealer warehouse information, including phone number and contact name, must be specified on the purchase order.

Zone	Percent	Minimum
Zone 1	3%	\$150
Zone 2	4%	\$150
Zone 3	5%	\$150
Zone 4	5.5%	\$150
Zone 5	6%	\$150

Percent bases on List Price.

Direct site deliveries may be requested with an additional freight cost. Requests for direct site deliveries must be made 2 weeks prior to the scheduled ship week and meet the following criteria:


- Minimum of half truckload
- Delivery site accessible by a 53' trailer
- Complete delivery site address with contact name and on-site phone number
- Labor available for unloading

Deliveries that do not meet the criteria must be directed to a receiver warehouse. If a receiver warehouse is not available, the dealer may make arrangements with their own 3rd party carrier. If a 3rd party carrier is elected, a contact name, phone number and e-mail address is required.

Bernhardt Design has a no touch freight policy. Drivers are not allowed to unload freight.

Weekend direct site deliveries will incur a \$500 per trailer weekend delivery fee. Weekend is defined as between 5 pm Friday and 8 am Monday.

Customers who decline GFP should refer to the shipping section of the Terms and Conditions page.

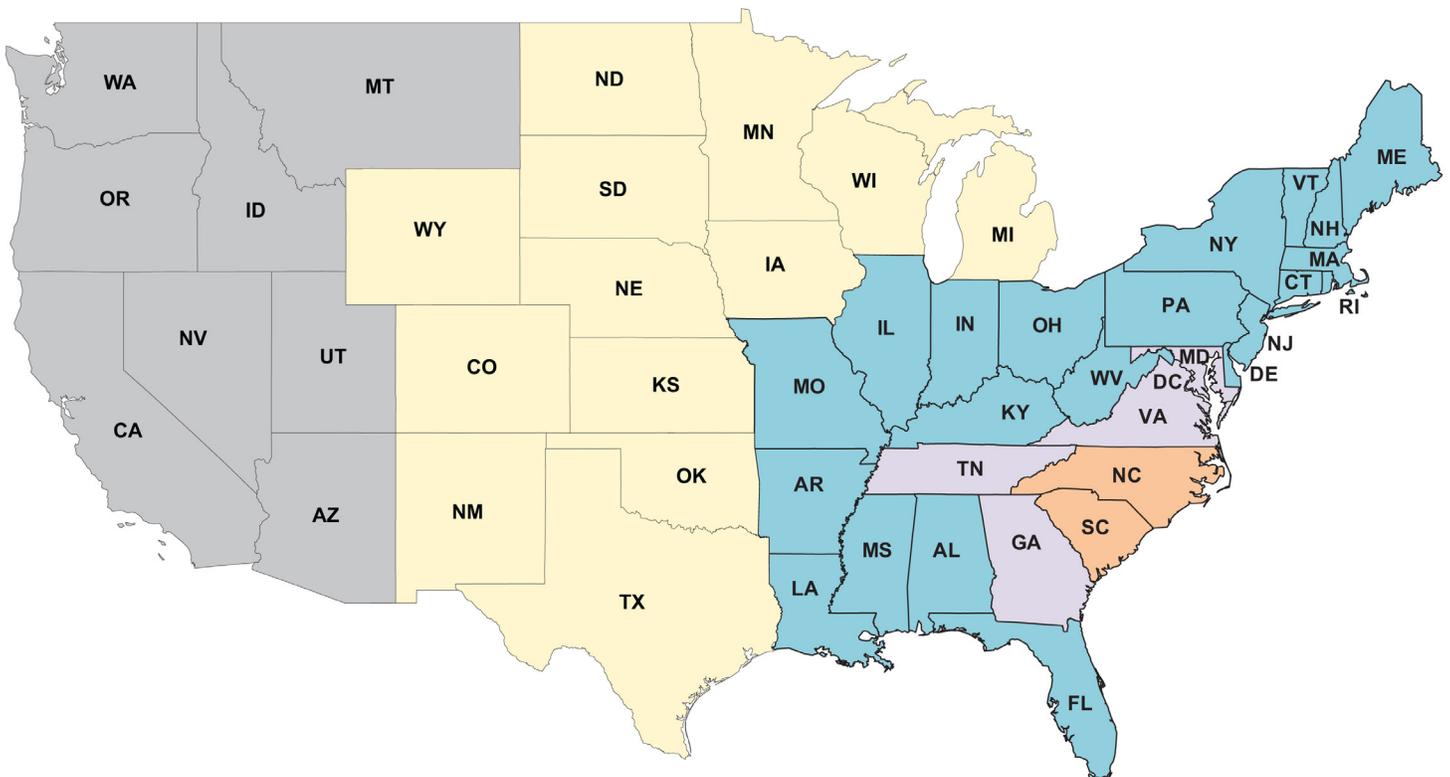

**Preferred Carrier Guaranteed Freight Rates - Canada**

Freight charges will be applied to orders as a separate line item based on the zones listed. Rates are based on zones with a minimum for each zone.

The freight amount is calculated on the total merchandise list COM price. Additional freight fuel surcharges may apply. Rates are based on deliveries made Monday through Friday, 8 am until 5 pm.

All orders are shipped by Bernhardt Design company trucks or preferred carriers specified by Bernhardt Design. **If a purchase order does not specify that the product must ship complete, Bernhardt Design reserves the right to select the most effective shipping method necessary, including split shipments.** Dealer warehouse information, including phone number and contact name, must be specified on the purchase order.

Direct site deliveries may be requested with an additional freight cost. Requests for direct site deliveries must be made 2 weeks prior to the scheduled ship week and meet the following criteria:

- Minimum of half truckload
- Delivery site accessible by a 53' trailer
- Complete delivery site address with contact name and on-site phone number
- Labor available for unloading

Deliveries that do not meet the criteria must be directed to a receiver warehouse. If a receiver warehouse is not available, the dealer may make arrangements with their own 3rd party carrier. If a 3rd party carrier is elected, a contact name, phone number and e-mail address is required.

Bernhardt Design has a no touch freight policy. Drivers are not allowed to unload freight.

Weekend direct site deliveries will incur a \$500 per trailer weekend delivery fee. Weekend is defined as between 5 pm Friday and 8 am Monday.

Customers who decline GFP should refer to the shipping section of the Terms and Conditions page.

Zone	Minimums	Freight	Avg. Bus. Days
Zone 1	\$200	5%	10 - 15
Zone 2	\$200	9%	10 - 15
Zone 3	\$200	8%	10 - 15
Zone 4	\$200	11%	10 - 15
Zone 5	Quote	Quote	

**The attached rates are strictly freight and do not include brokerage fees.**

