


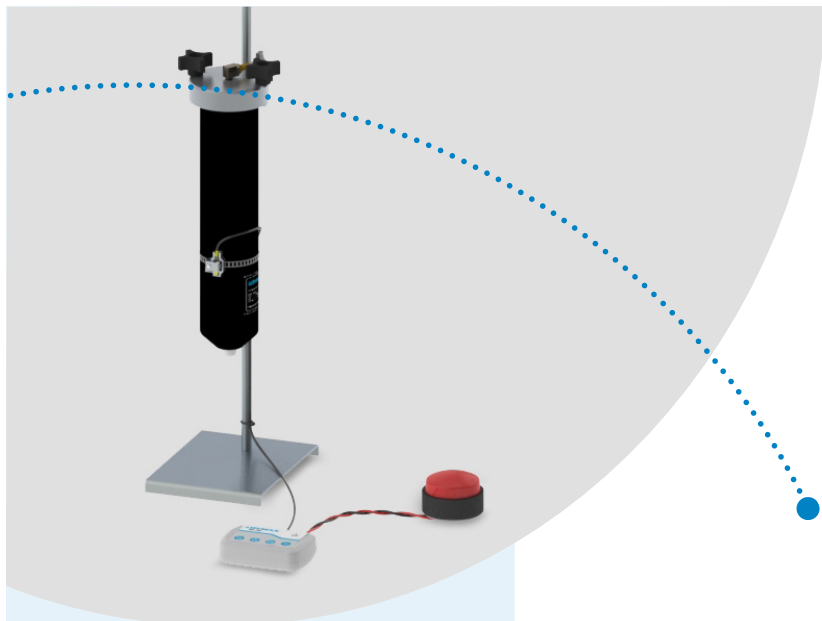

## Low-Level Sensor Systems

### Accurately Monitor Material Levels in Cartridge Reservoirs & Pressure Pots

- User-friendly design that is easy to operate and maintain
- Prevent empty material reservoirs from introducing air into dispensing lines
- Indirect sensing – sensor never comes in contact with material
- Compact, lightweight, accessible
- Range of travel adjustments for cartridge and pressure plate sensors
- Universal power supply and power plug adapters
- Manual or PLC controlled operation
- Low-level functions include remote visual beacon, audio buzzer, and auto shutdown
- CE marked - Available for sale worldwide


Dymax low-level sensor systems allow users to accurately monitor material levels during the dispensing process with an adjustable sensor mount. Two sensor system configurations are available allowing integration into cartridge or pressure pot material reservoirs. Both configurations feature an SB-100 controller which activates a warning when the material level in the reservoir reaches a specified low level. Users can adjust the sensor height to their preferred volume. The SB-100 controller also features an external PLC connection that allows for a total line shutdown. Both functions save time and money by stopping the dispense system when material reservoirs are empty.

Standard systems include a reservoir with sensor, control box, and beacon. Systems are available without the controller for machine builders.




Dymax low-level sensor systems are available in cartridge and reservoir configurations as well as systems for machine and automated builders. Machine builder systems tie directly into PLCs and do not require the SB-100 controller.


| Specifications                                                        | Cartridge Reservoir Configuration                                                                                                                                                      |                                   |                                      | Bottle Drop-In Tank Configuration                                                                                                      |
|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standard System Components</b>                                     | Retainer with mounting bracket<br>Capacitive sensor (12 oz)<br>Magnetic sensor (20 oz and 32 oz)<br>SB-100 controller with integral buzzer<br>Remote beacon (red)<br>Adjustable height |                                   |                                      | Pressure plate (adjustable limit)<br>Bulkhead pass-through for wiring<br>SB-100 controller with integral buzzer<br>Remote beacon (red) |
| <b>Standard System</b>                                                | T17974                                                                                                                                                                                 | T17970                            | T17972                               | T17985                                                                                                                                 |
| <b>Machine Builder System</b><br>(does not include SB-100 controller) | T17975                                                                                                                                                                                 | T17971                            | T17973                               | T18481                                                                                                                                 |
| <b>Upgrade Kit</b> (for existing reservoirs)                          | -                                                                                                                                                                                      | -                                 | -                                    | T18500                                                                                                                                 |
| <b>Reservoir Size</b>                                                 | 12 oz [300 mL]                                                                                                                                                                         | 20 oz [550 mL]                    | 32 oz [945 mL]                       | 1 Gallon                                                                                                                               |
| <b>Reservoir Dimensions (Diameter x H)</b>                            | 3.5 in x 13 in<br>[89 mm x 330 mm]                                                                                                                                                     | 4 in x 11 in<br>[102 mm x 279 mm] | 4 in x 12.75 in<br>[102 mm x 324 mm] | 11 x 19 in [279 mm x 483 mm]                                                                                                           |
| <b>Pressure Plate Dimensions (W x D x H)</b>                          | N/A                                                                                                                                                                                    |                                   |                                      | 4.5 in x 5 in x 1 in [114 mm x 127 mm x 25 mm]                                                                                         |
| <b>Controller (W x D x H)</b>                                         | 4.5 in x 3.5 in x 1.25 in [114 mm x 89 mm x 32 mm]                                                                                                                                     |                                   |                                      |                                                                                                                                        |
| <b>Performance Requirements</b>                                       | 120VAC, 240VAC, 50/60 Hz, 1/10 amp                                                                                                                                                     |                                   |                                      |                                                                                                                                        |
| <b>Operation</b>                                                      | Initial set-up requires calibration                                                                                                                                                    |                                   |                                      |                                                                                                                                        |
| <b>Accuracy &amp; Repeatability</b>                                   | Upon initial setting, repeatability (hysteresis) is +/- 2-5%                                                                                                                           |                                   |                                      |                                                                                                                                        |
| <b>Warranty</b>                                                       | 1 year from purchase                                                                                                                                                                   |                                   |                                      |                                                                                                                                        |




12 oz [300 mL]



20 oz [550 mL]



32 oz [945 mL]



1-Gallon Bottle Drop-In Tank