


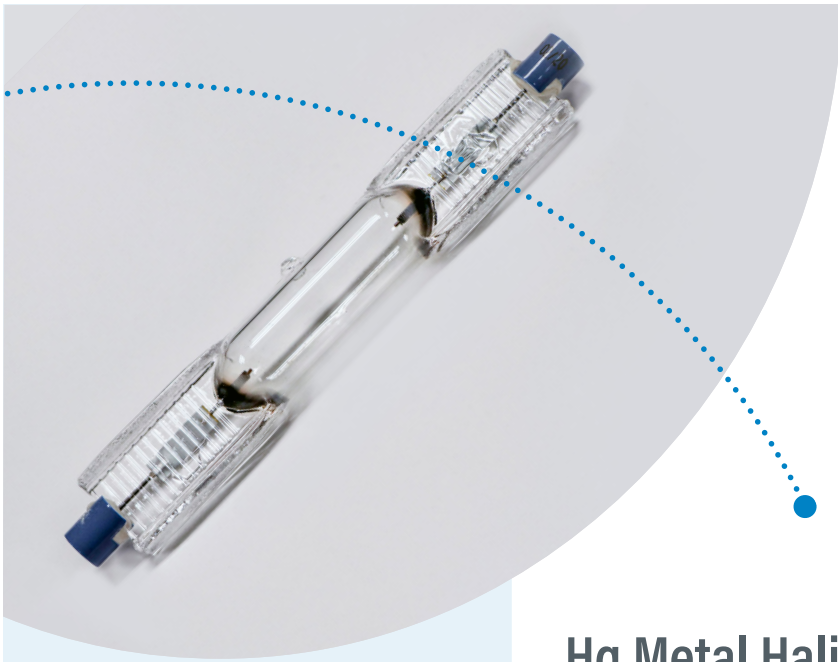

Hg Metal Halide Bulb

- Compatible with Dymax EC, ECE, and Porta-Ray® flood systems

Also compatible with legacy systems, including the BondBox, PC-2, PC-5, ADAC CureZone, ADAC CureZone 2, ADAC CureZone 2HO, PC-series, and AS-series


- Long bulb life - fewer bulb changes for lower operating costs
- Matches the cure chemistry of most Dymax light-curable materials

The UV curing bulb is a key component in a light-curing flood lamp system. Dymax UV curing bulbs maximize curing intensity while minimizing intensity degradation over time, resulting in fewer bulb changes as well as lower operating costs. Hg metal halide bulbs come standard in Dymax EC and ECE-series flood lamps to match the cure chemistry of most Dymax light-curable materials.


Specifications*	
Part Number	38560
Connection/Socket	R7s
Lamp Current	3.2 A
Lamp Voltage	135 V (±15V)
Lamp Wattage	380W
Line Voltage	230V
Ballast Type	400W Power Supply
Ignitor	ZRM 4.5 ES/B
Operating Position	Horizontal
Tube Temperature	650°C – 950°C
Useful Life	2,000 Hours
Intensity Degradation	≤ 20% at 315-400 nm after 2,000 hours – based on 20 hours value
Power Switching	25' / 5' (on/off)

* All data is based on average values, which have been achieved upon normal conditions. Due to technical and/or physical reasons, individual lamp performance may vary ± 10%.




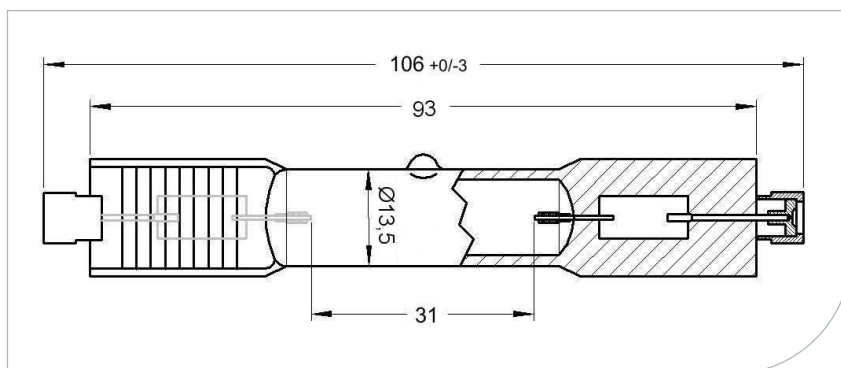

Hg Metal Halide Bulb Dimensions

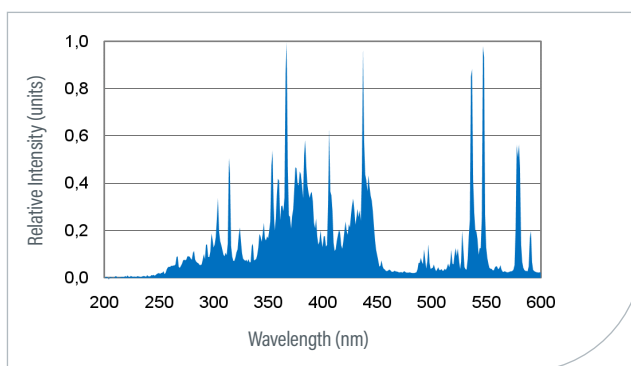

Standardized Spectrum

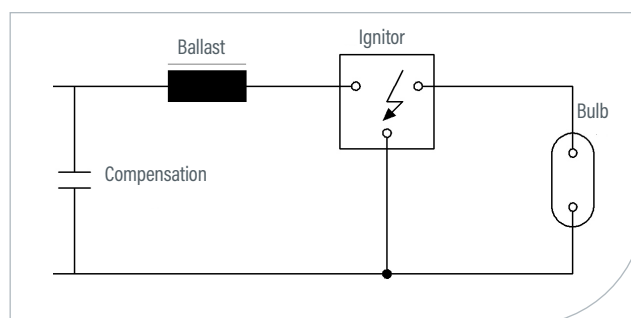

Circuit Diagram