

DATA SHEET

# 1200 Dowel Grille

Real Wood Veneer




# 1200 | DOWEL GRILLE

REAL WOOD VENEER

The **9Wood Dowel Grille** style wood ceiling offers a design where the individual wood member is deeper than it is wide. Veneer panel width is 12", and lengths range from 2' to 10', in 1' increments.

Attachment for the **Dowel Grille** is via screws and wood dowel clips that engage into standard 15/16" T-Bar grid. This provides basic accessibility for each panel.

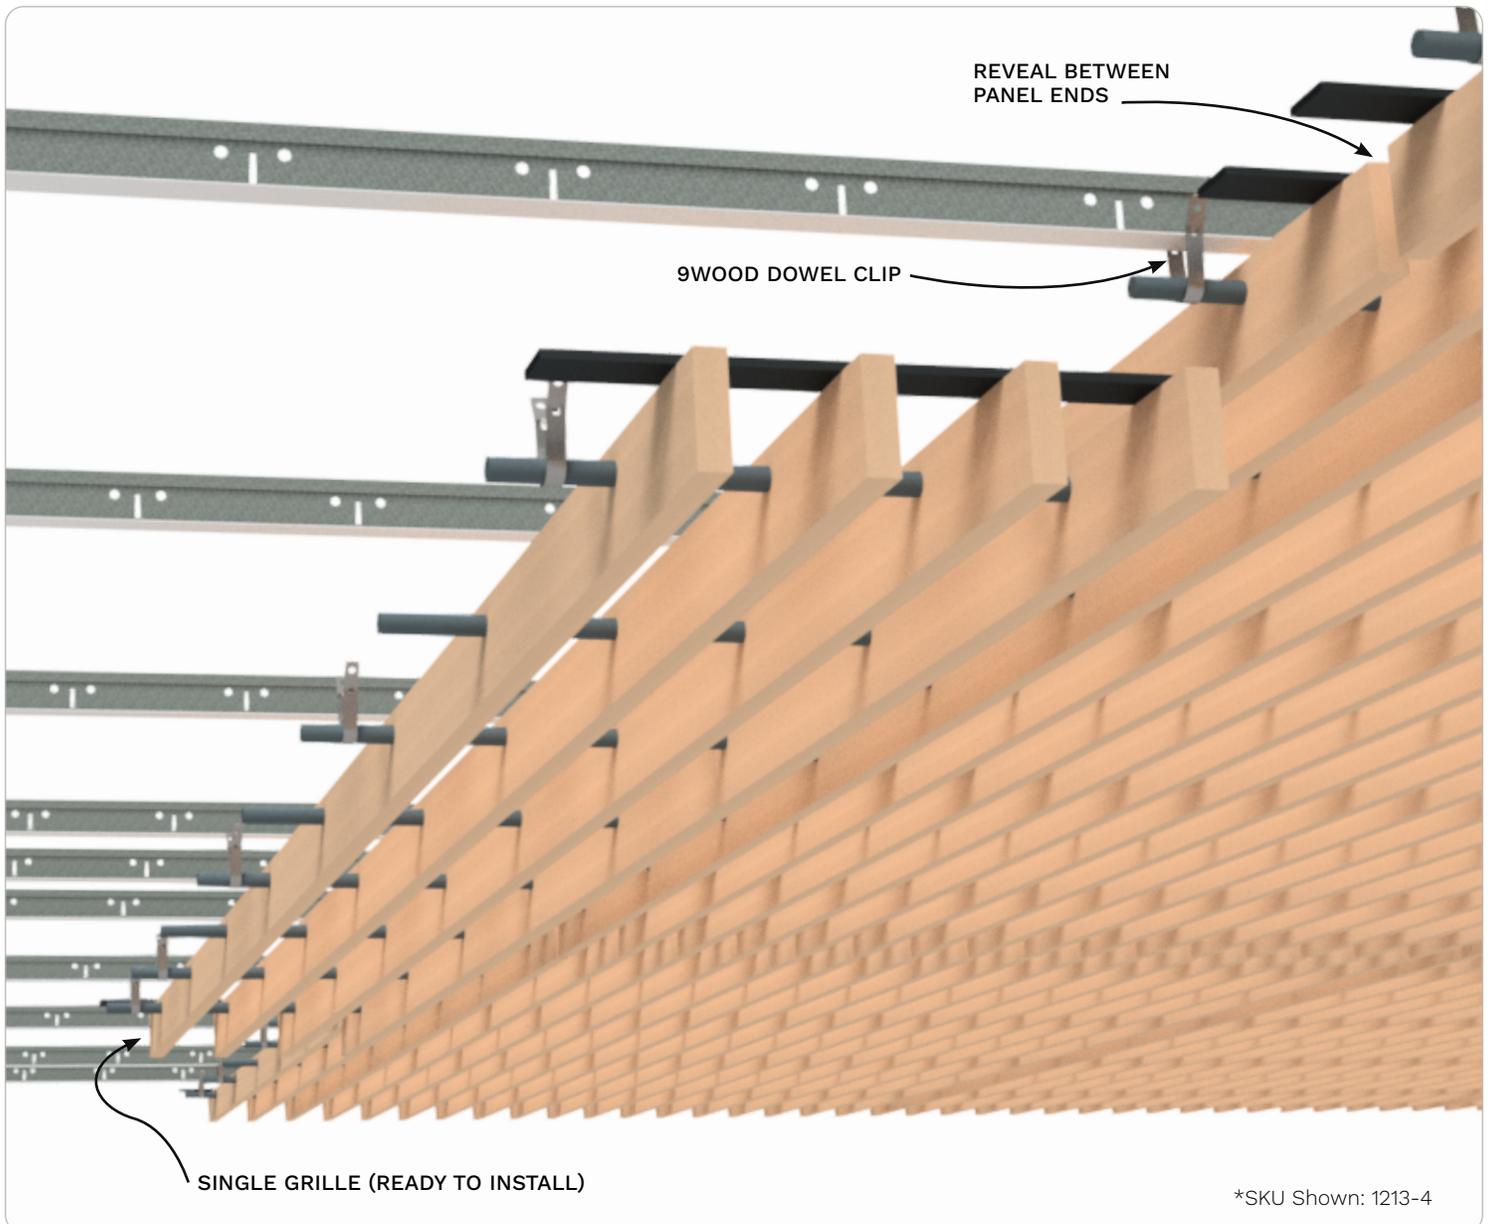


\*SKU Shown: 1213-4


# DOWEL GRILLE | Typical Specifications



## Typical Specifications

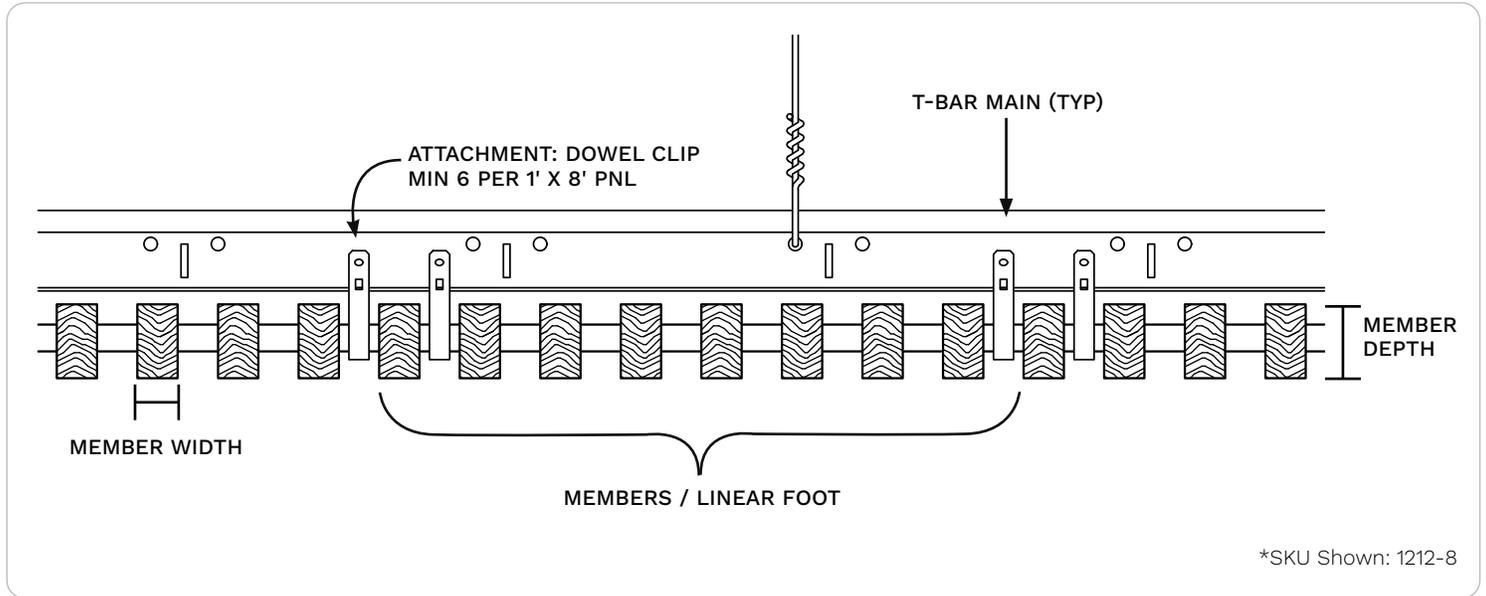

## Suspension Conditions

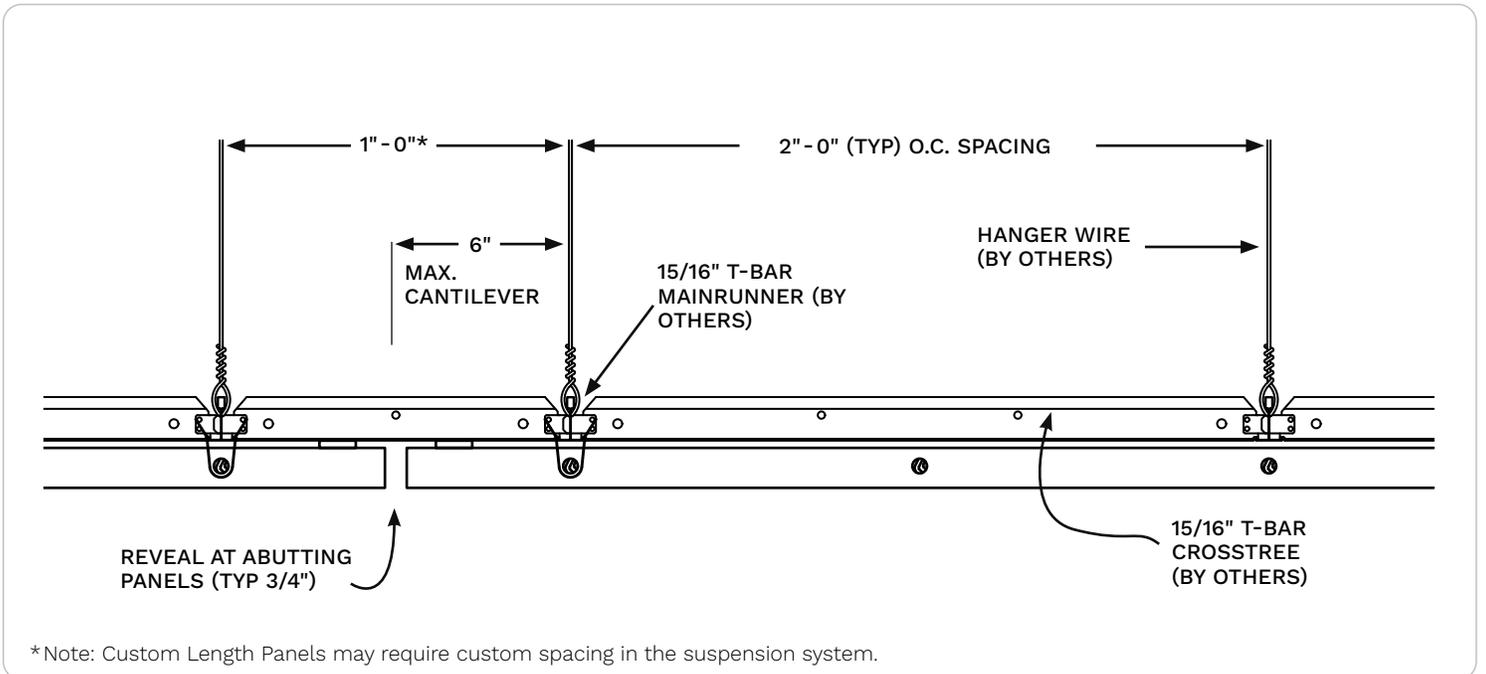




## How to build your SKU

- **Pick your member size** (Rows). This gives you your first four digits (e.g., 1214).
- **Pick your density** (Columns). This is the number of wood members per foot.
- **Combine them with a dash.** A 1 x 4 member with 6 members per foot creates SKU 1214-6.

## SKU Decoder

Example: 12 14 - 6

- Style "1200 Dowel Grille"
- Member Size "1 x 4 Nominal"
- Density "6 Members / LF"



## SKU Table

Member Size (Nominal)	Width	Depth	Density (Members per Linear Foot)							
			2	3	4	5	6	7	8	
1 x 2	¾"	1 ⅜"	1212-2	1212-3	1212-4	1212-5	1212-6	1212-7	1212-8	
1 x 3	¾"	2 ¼"	1213-2	1213-3	1213-4	1213-5	1213-6	1213-7	1213-8	
1 x 4	¾"	3 ¼"	1214-2	1214-3	1214-4	1214-5	1214-6			
1 x 6	¾"	5 ¼"	1216-2	1216-3	1216-4	1216-5				
2 x 3	1 ⅞"	2 ¼"	1223-2	1223-3	1223-4	1223-5	1223-6			
2 x 4	1 ⅞"	3 ¼"	1224-2	1224-3	1224-4	1224-5	1224-6			
2 x 6	1 ⅞"	5 ¼"	1226-2							

Additional width, depth, and M/LF options may be available. Please check with 9Wood if you don't see the combination that you have in mind.


# DOWEL GRILLE | Lighting Integration Guidance



## Key Points

- All fixtures **must** be independently supported.
- Cut panels may require supplemental reinforcement.
- 9Wood is here to help

## Downlight Examples

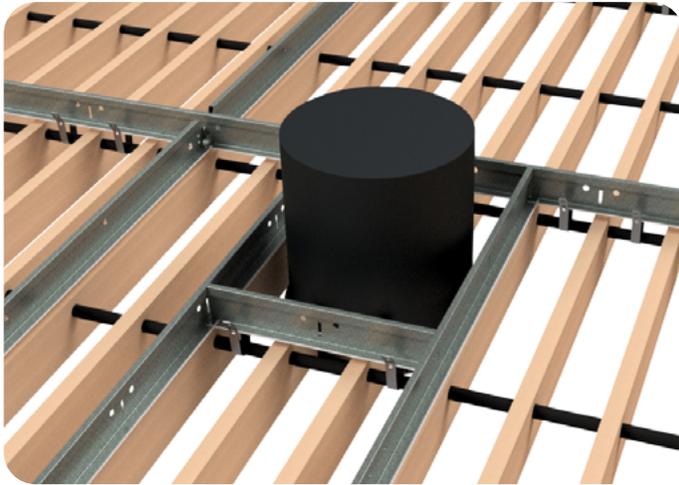


**Direct Mount to T-Bar options** use clips or brackets to attach lighting fixtures securely. Cut panels may require supplemental reinforcement.




**Integrate Downlights**, cut precise openings in slats and add trim rings for downlights when cutting slats.

## Linear Lighting Examples

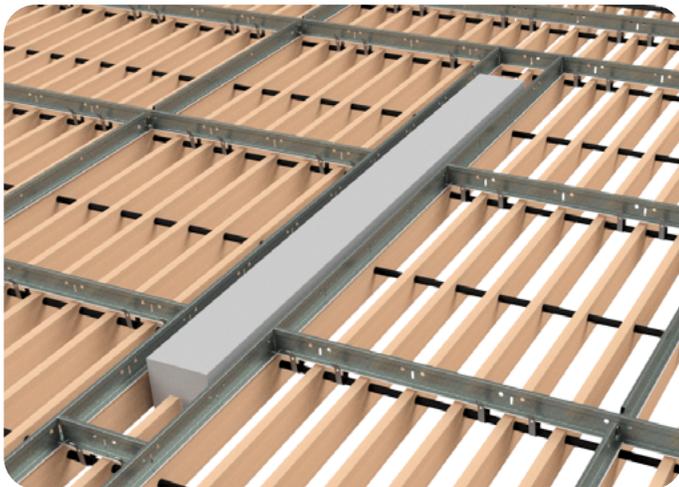

**Fixtures must be independently supported.** Lighting is always mounted to structure or T-Bar, not to wood members or clips.

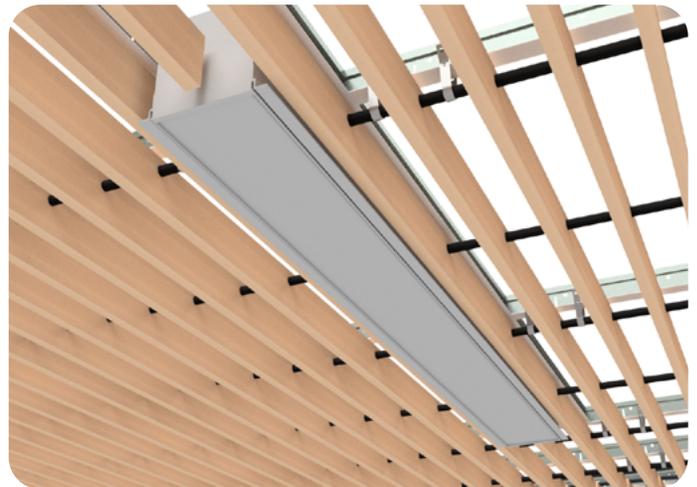

**Integrate Linear Lighting** by running fixtures parallel to the wood slats and coordinating dimensions with the slat reveals.

# SPECIES OPTIONS | Real Wood Veneer




## Species Options


Custom Made Fast veneer products are available in twelve FSC-certified wood species options. As with all natural wood products, there will be variation in color, grain, and natural characteristics. Veneers are available in either a 3–6 week or 8–10 week lead time depending on SKU + Species combination. Please check with 9Wood to learn more.

## Finish & Color Options


All products are finished with a clear matte topcoat, regardless of color. Standard Colors are available on Cherry and White Oak veneers. Custom Color Matching is always available with no required minimums and at the same cost as Standard options. Send 9Wood a control sample to get started.

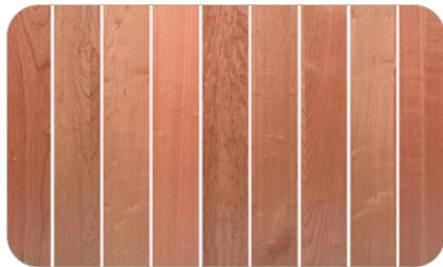

**Cherry**  
Plain Sliced

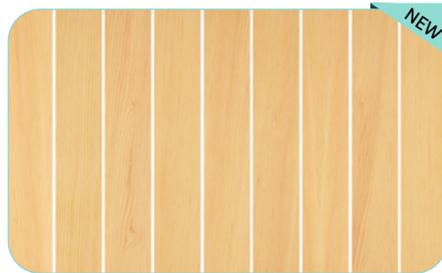

**Douglas Fir**  
Quarter Sliced

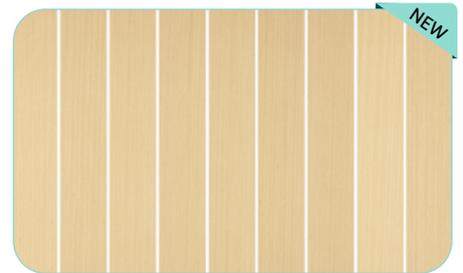

**Engineered Elm**  
Quarter Sliced



**Engineered Walnut**  
Quarter Sliced



**Khaya Mahogany**  
Quarter Sliced



**Sapele**  
Quarter Sliced



**Walnut**  
Plain Sliced



**Walnut**  
Quarter Sliced



**White Ash**  
Plain Sliced



**White Maple**  
Plain Sliced



**White Oak**  
Plain Sliced



**White Oak**  
Rift Sliced



## Application

The Dowel Grille uses a pre-assembled panel fabrication process. This product can be installed throughout the country and is the preferred design in areas requiring seismic compliance. Panel access is available by means of removing attachment screws hidden in reveals. Repeated removal requires threaded 9Wood Caddy-Lock attachment as opposed to screws.

### Acclimatization

Cross Piece Grilles must be cared for in a controlled interior environment (RH 25%-55% max; temp. 60°-80°) and installed only after reaching equilibrium moisture content.

### Acoustics

The Dowel Grille can enhance acoustics via sound absorbing material placed over open reveals within the T-Bar grid. Insulation is typically provided locally. Specifiers should search within CSI MasterFormat Division 09 and Division 23, including:

09 81 00 Acoustical Insulation

09 84 00 Acoustical Wall/Ceiling Elements

23 07 00 HVAC Insulation

### Fire Rating

Individual members use Fire Rated Particalboard core and meet Class A per ASTM E84.

### LEED

Dowel Grilles may help contribute to LEED credits for: Material sourcing, Material ingredients, Low Emitting Materials, and Environmental Product Declarations. Credit support based on design choices, please contact 9Wood for more information.

### MEP

The Dowel Grille permits MEP penetrations in the ceiling's surface. Cut panels may require supplemental reinforcement. Fixtures and diffusers must be independently supported.

### Seismic

Dowel Grilles can provide seismic code compliance by means of mechanical direct screw attachment to T-Bar via supplemental cross-piece backers, eliminating the nonseismic dowel clips. Please consult local code or a licensed engineer for any additional requirements.

### Suspension

Dowel Grilles are clipped onto 15/16" heavy duty T-Bar main runners. Main runners are typically 2' on center.

### System Weight

Dowel Grilles typically weigh 2-4 pounds per square foot, depending on members per linear foot and species.



Custom  
made fast

9wood.com

999 South A Street  
Springfield, OR 97477  
Tel: 888-767-9990  
sales@9wood.com

This information is for illustrative purposes only. The featured products and processes are specific to the project and should not be duplicated without consulting 9Wood. © 2025 9Wood