



DATA SHEET

4100 Tegular Tile


Real Wood Veneer



4100 | TEGULAR TILE | REAL WOOD VENEER


The 4100 Tegular Tile wood ceiling offers a tiled appearance. The 4100 Tegular Tile hangs from and is accented by 9/16" standard black T-Grid. 5/8" reveals between panels are created by the width of the T-Bar flange.

Attachment for the Tegular Tile is via a lay-in installation, supported by 9Wood's Tegular Clip.

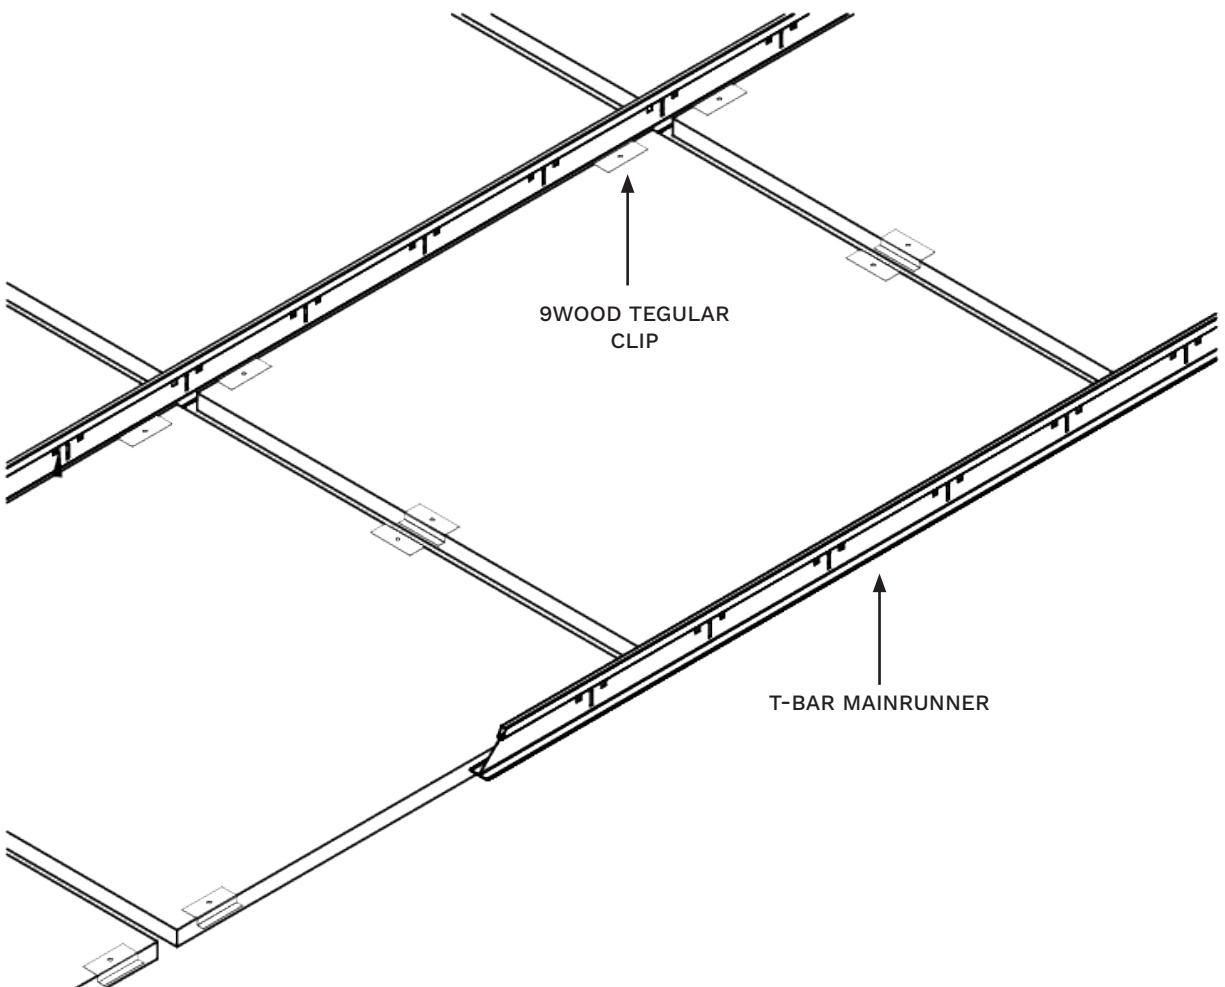



Typical Specifications

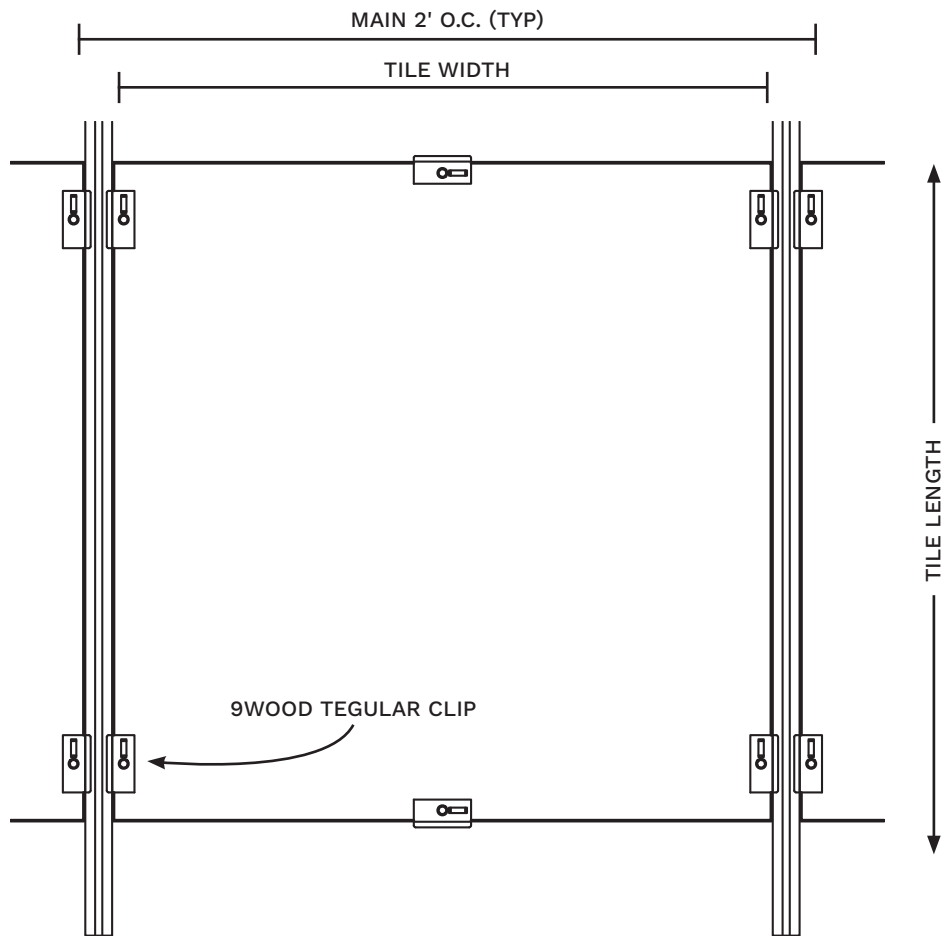


SKU Table

Tile Width	Tile Length (Parallel to Grain Direction)	
	23-3/8"	47-3/8"
23-3/8"	4124-24	4124-48
47-3/8"		4148-48

Additional width and MLF options may be available.
Please check with 9Wood if you don't see the combination that you have in mind.



Perimeter Conditions and Suspension

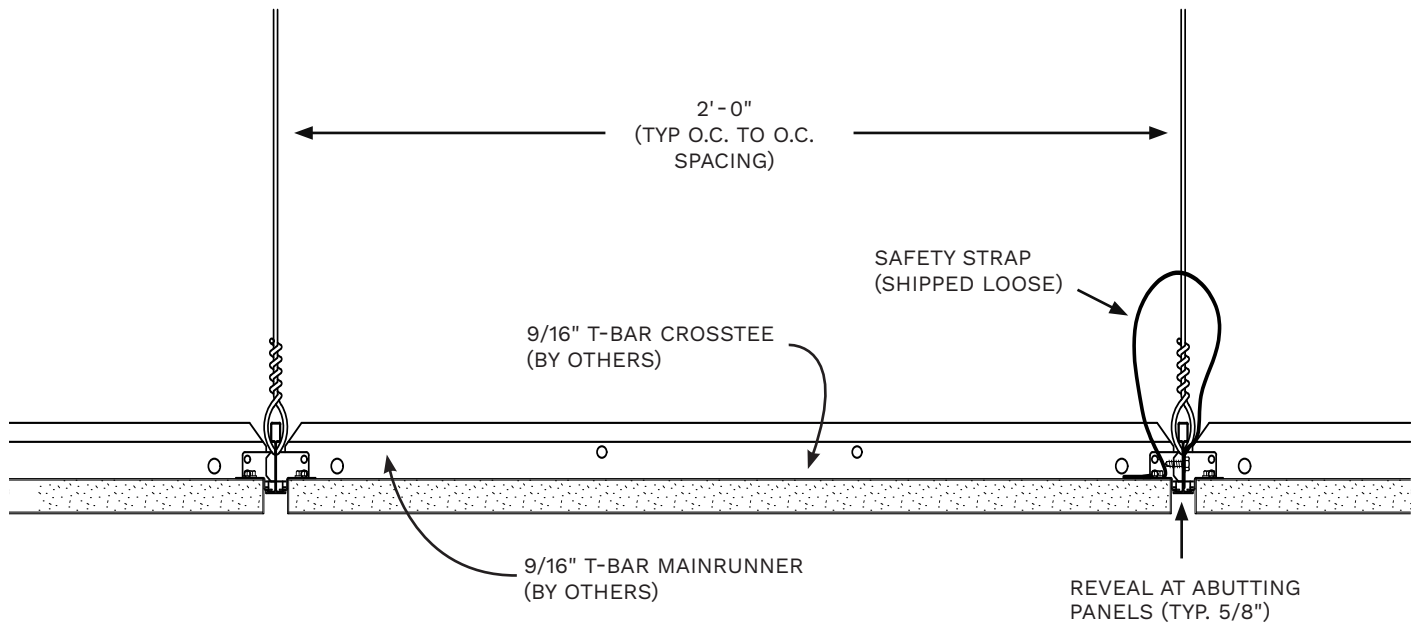

*Note: Safety Strap - required only in seismic zones

NATURAL COLOR VARIATION SHEET



Species & Finishes

For veneer options, 9Wood Custom Made Fast offers Plain Sliced (PS) Cherry, Walnut, White Maple, and Rift Sliced (RS) White Oak. All products, regardless of color are finished with a beautiful clear matte topcoat. Order your sample today at 9Wood.com.

Wood Stain Capabilities

White Oak and Cherry can be easily stained to match any custom or standard colors and typically Walnut and White Maple are coated with a clear

Cherry Veneer



White Oak Veneer



White Maple Veneer



Walnut Veneer





Application

The Tegular Tile provides a modular tiled (Latin tegular) look. The T-Bar creates a reveal or can be capped with wood for an accented border. Tiles are fabricated using real wood veneers on fire rated cores. This is a partially accessible system, with lift, shift and remove accessibility. In seismic zones it requires a safety-wire tie-off or lock-down screws.

Performance

Acclimatization

Tegular Tiles must be cared for in a controlled interior environment (RH 25%-55% max; temp. 60°-80°) and installed only after reaching equilibrium moisture content.

Acoustics

The Tegular Tile is considered acoustically reflective unless perforated

Fire Rating

Individual members use Fire Rated Patricalboard core and meet Class A per ASTM E84.

LEED

Tegular Tiles may help contribute to LEED credits for: Material sourcing, Material ingredients, Low Emitting Materials, and Environmental Product Declarations. Credit support based on design choices, please contact 9Wood for more information.

Suspension

Tegular Tiles are suspended from 9/16" heavy duty T-Bar main runners. Main runners are installed 2' on center, depending on system weight.

MEP

The Tegular Tile permits MEP penetrations in the ceiling's surface. Cut panels may require supplemental reinforcement. Fixtures and diffusers must be independently supported.

Seismic

Tegular Tiles may require a safety wire tie-off or screw-locks to T-Bar. Please consult local code or a licensed engineer for any additional requirements.

System Weight

Tegular Tiles typically weigh 3 pounds per square foot or less.



Custom
made fast

9wood.com

999 South A Street
Springfield, OR 97477
Tel: 888-767-9990
sales@9wood.com

This information is for illustrative purposes only. The featured products and processes are specific to the project and should not be duplicated without consulting 9Wood. © 2025 9Wood