

DATA SHEET

# 4600 True Access Tile

Real Wood Veneer




# 4600 | TRUE ACCESS TILE

REAL WOOD  
VENEER


The 4600 True Access Tile wood ceiling offers a floating tiled appearance with downward access. The 4600 style snaps up into T-Bar brackets. A 3/8" reveal conceals suspension grid.

Attachment for the True Access Tile is via 9Wood's Tension Spring Clip and Spring Holster Clip.

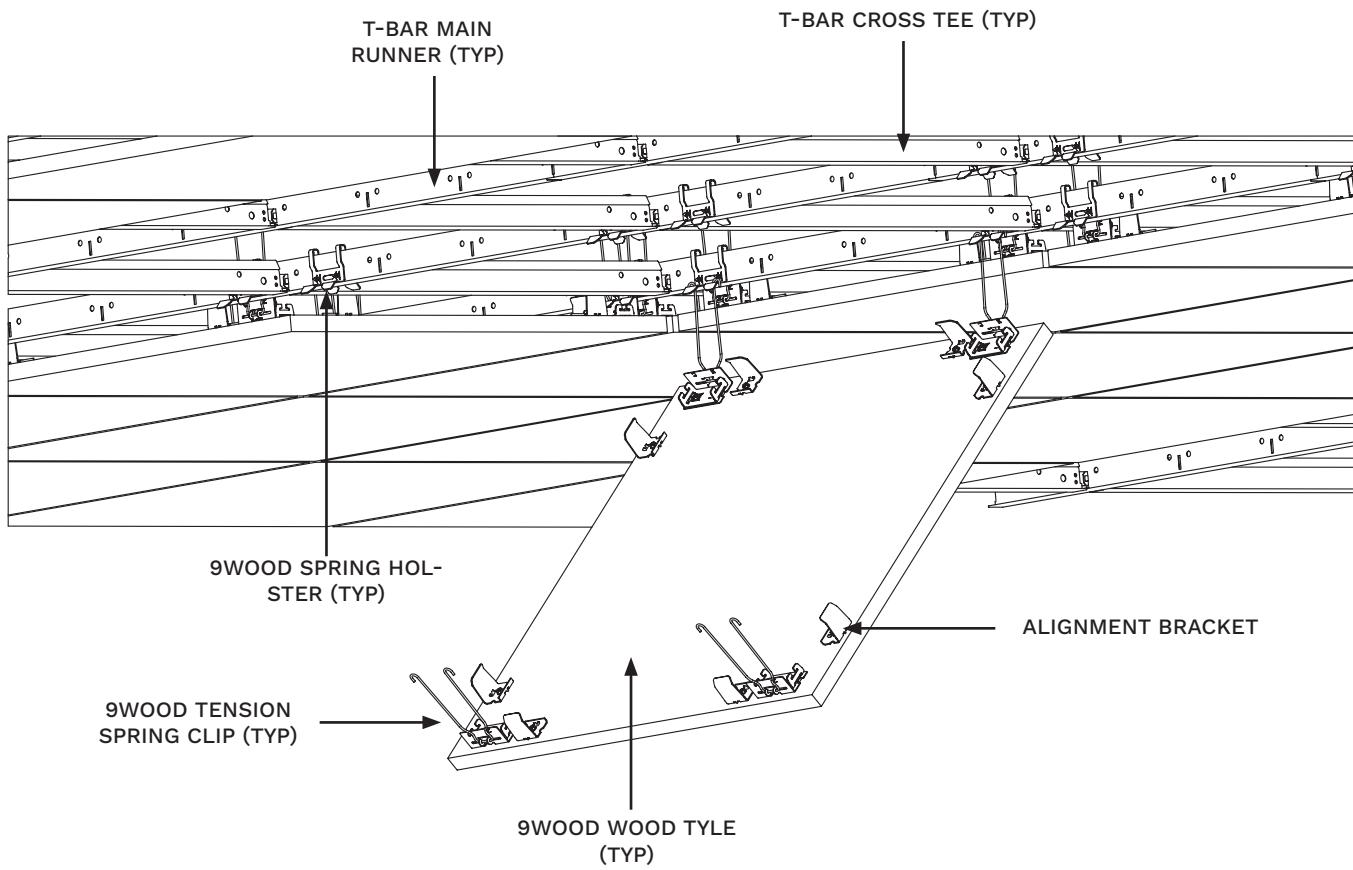




## Suspension

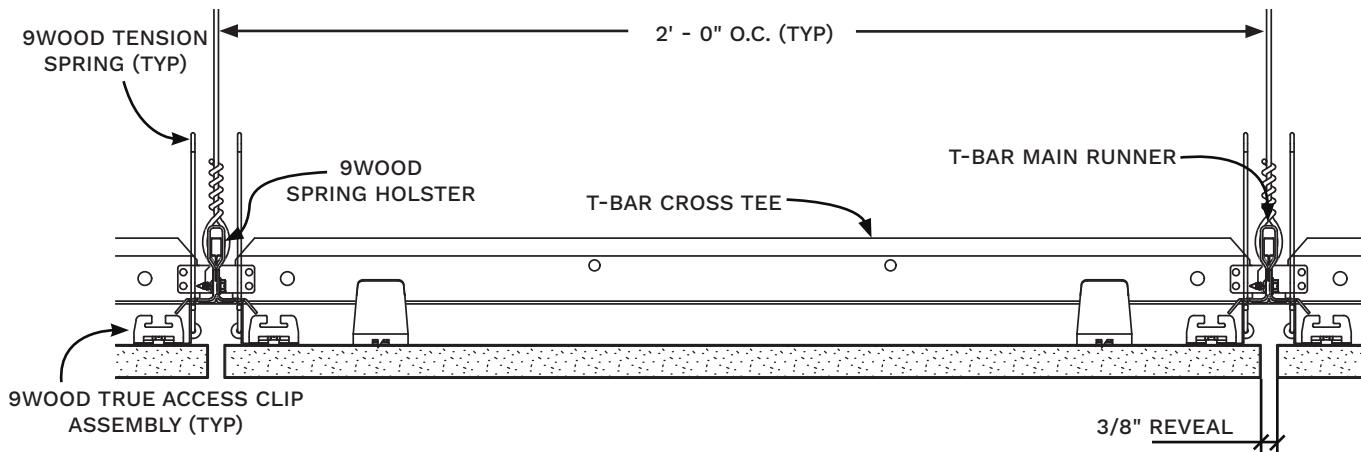



## System Depth

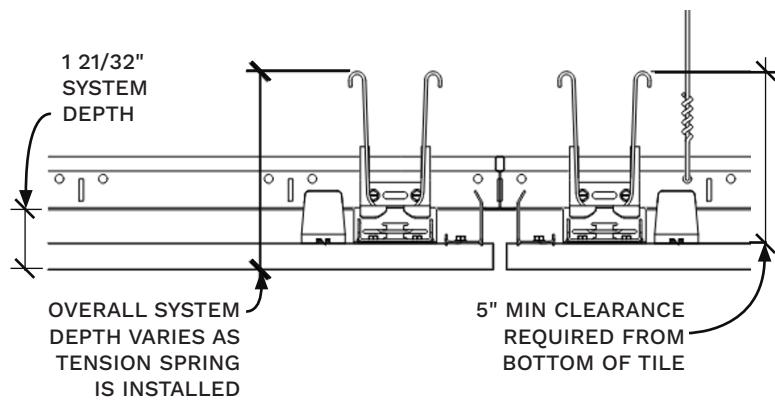


# TRUE ACCESS TILE | Typical Specifications



## Typical Specifications

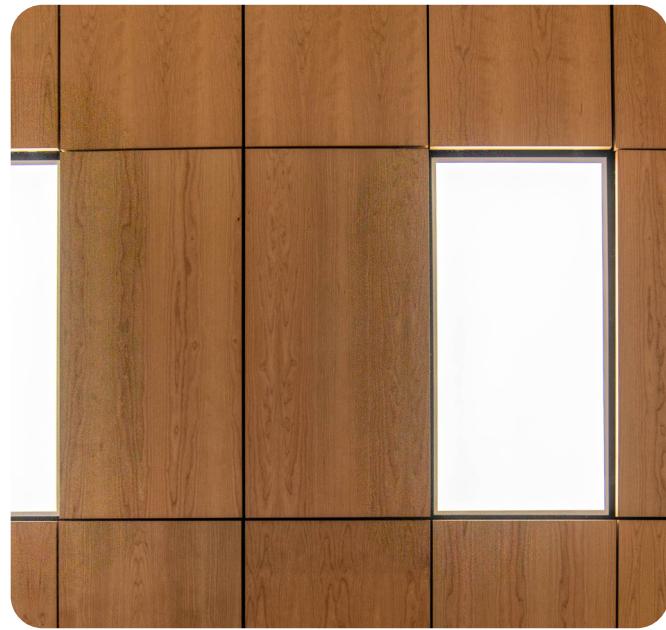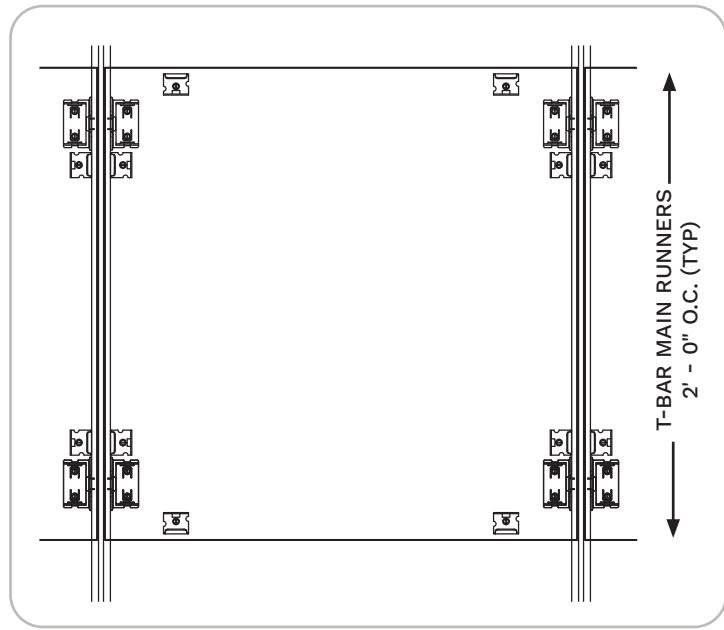

## Attachment Details

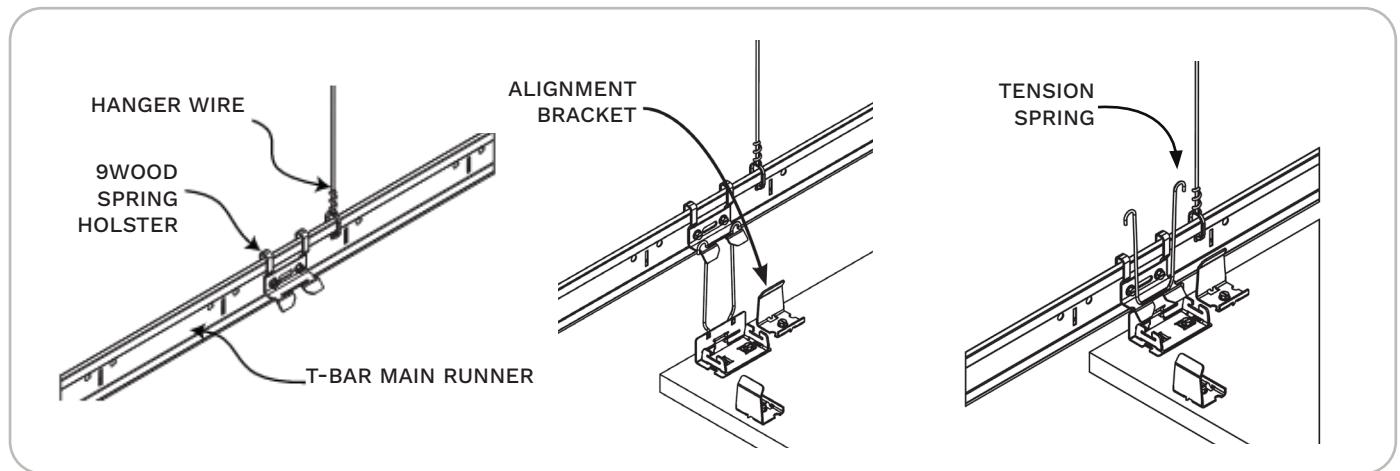



## How to build your SKU

- Confirm your style.** You are specifying the 4600 True Access Tile system.
- Match your grid width.** (Rows). Choose the nominal width that matches your T-Bar spacing (e.g. 24")
- Define your panel length.** (Columns) Select how long you want each individual tile to be.
- Finalize the SKU.** Add the length after the SKU. A 2' x 4' True Access Tile becomes 4624-48.

## SKU Decoder

- "Style" 4600 True Access Tile
- "Nominal Width" 24" Tile Width
- "Nominal Length" 48" Tile Length

Example: 46 24 - 48

46 XX - XX  
XX 24 - XX  
XXXX - 48

## SKU Table

Width	Nominal Width	Nominal Length (Parallel to Grain Direction)						
		24	36	48	60	72	84	96
11 5/8"	12	4612-24	4612-36	4612-48	4612-60	4612-72	4612-84	4612-96
23 5/8"	24	4624-24	4624-36	4624-48	4624-60	4624-72	4624-84	4624-96
35 5/8"	36	4624-24	4636-36	4636-48	4636-60	4636-72	4636-84	4636-96
47 5/8"	48	4648-24	4648-36	4648-48	4648-60	4648-72	4648-84	4648-96

Additional panel dimensions and tile options may be available.  
Please check with 9Wood if you don't see the combination that you have in mind.

# TRUE ACCESS TILE | Species & Finish Options



## Species Options

Custom Made Fast veneer products are available in twelve wood species options. All veneers are FSC-certified. New veneer options are available in 8–10 week lead time. All other veneer options are available with a 3–6 week lead time. As with all natural wood products, there will be variation in color, grain, and natural characteristics.

## Finish & Color Options


All products are finished with a clear matte topcoat, regardless of color. Standard Colors are available on Cherry and White Oak veneers. Custom Color Matching is always available with no required minimums and at the same cost as Standard options. Send 9Wood a control sample to get started.



**Cherry**  
Plain Sliced



**Douglas Fir**  
Quarter Sliced

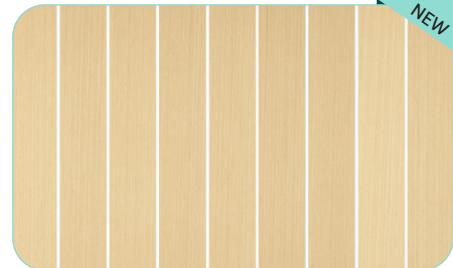


**Engineered Elm**  
Quarter Sliced



**Engineered Walnut**  
Quarter Sliced



**Khaya Mahogany**  
Quarter Sliced

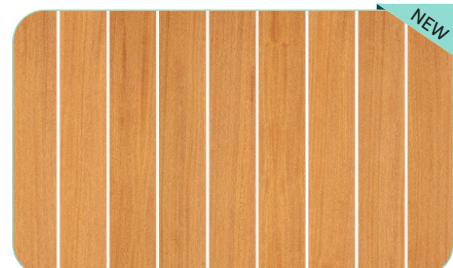

**Sapele**  
Quarter Sliced



**Walnut**  
Plain Sliced



**Walnut**  
Quarter Sliced



**White Ash**  
Plain Sliced



**White Maple**  
Plain Sliced



**White Oak**  
Plain Sliced



**White Oak**  
Rift Sliced



## Application

The True Access Tile is engineered for seismic compliance and provides a floating tiled look with concealed suspension using real wood veneers on fire rated cores. This is a fully, downward accessible system, with pull down, spring release accessibility.

### Acclimatization

Wood Tile products must be cared for in a controlled interior environment (RH 25%-50% max; temp. 50°-85°) and installed only after reaching equilibrium moisture content.

### Acoustics

The 4600 style is considered acoustically reflective.

### Fire Rating

Individual members use Fire Rated Particalboard core and meet Class A per ASTM E84.

### LEED

True Access Tiles may help contribute to LEED credits for: Material sourcing, Material ingredients, Low Emitting Materials, and Environmental Product Declarations. Credit support based on design choices, please contact 9Wood for more information.

### Suspension

True Access Tiles are suspended from 15/16" heavy duty T-Bar main runners. Main runners are installed 2' on center, depending on system weight.

### MEP

True Access Tile permits MEP penetrations in the ceiling's surface. Cut panels may require supplemental reinforcement and may render the panel inaccessible. Fixtures and diffusers must be independently supported.

### Seismic

True Access Tiles can be engineered to meet seismic requirements. Consult local code for any additional requirements or a licensed local engineer.

### System Weight

The 4600 True Access Tile weighs 3-4 lbs / sq ft.



Custom  
made fast

9wood.com

999 South A Street  
Springfield, OR 97477  
Tel: 888-767-9990  
sales@9wood.com

This information is for illustrative purposes only.  
The featured products and processes are specific  
to the project and should not be duplicated  
without consulting 9Wood. © 2025 9Wood

January 2026