

DATA SHEET

4600  
True Access  
Tile

Real Wood Veneer






# 4600 | TRUE ACCESS TILE | REAL WOOD VENEER

The 4600 True Access Tile wood ceiling offers a floating tiled appearance with downward access. The 4600 style snaps up into T-Bar brackets. A 3/8" reveal conceals suspension grid.

Attachment for the True Access Tile is via 9Wood's Tension Spring Clip and Spring Holster Clip.

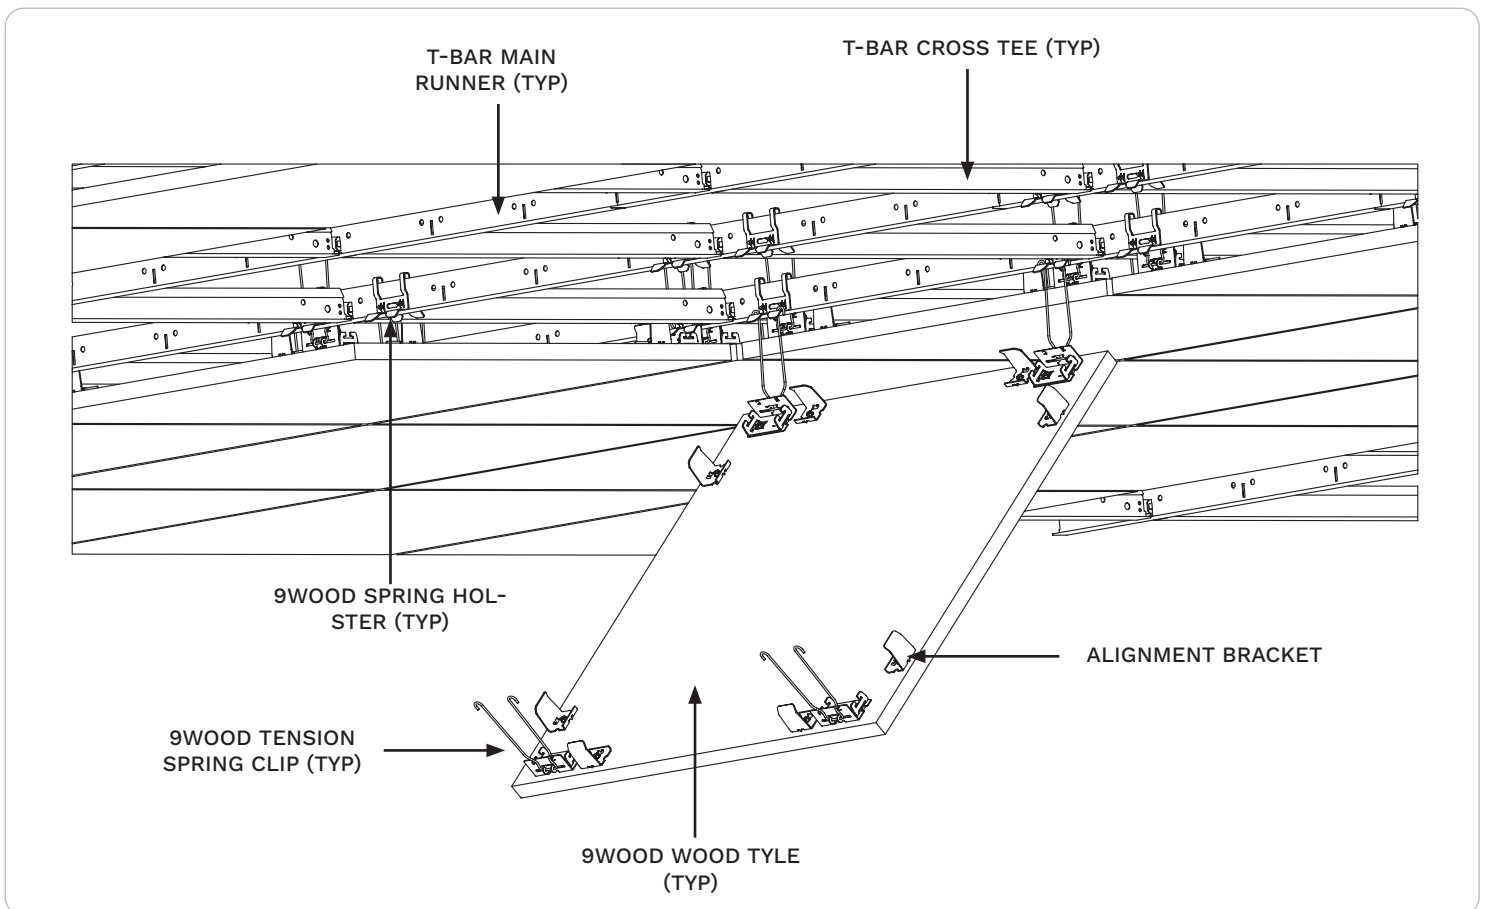



## Application

The True Access Tile is engineered for seismic compliance and provides a floating tiled look with concealed suspension using real wood veneers on fire rated cores. This is a fully, downward accessible system, with pull down, spring release accessibility.

## Performance

### Acclimatization

Wood Tile products must be cared for in a controlled interior environment (RH 25%-50% max; temp. 50°-85°) and installed only after reaching equilibrium moisture content.

### Acoustics

The 4600 style is considered acoustically reflective.

### Fire Rating

Individual members use Fire Rated Particalboard core and meet Class A per ASTM E84.

### LEED

True Access Tiles may help contribute to LEED credits for: Material sourcing, Material ingredients, Low Emitting Materials, and Environmental Product Declarations. Credit support based on design choices, please contact 9Wood for more information.

### Suspension

True Access Tiles are suspended from 15/16" heavy duty T-Bar main runners. Main runners are installed 2' on center, depending on system weight.

### MEP

True Access Tile permits MEP penetrations in the ceiling's surface. Cut panels may require supplemental reinforcement and may render the panel inaccessible. Fixtures and diffusers must be independently supported.

### Seismic

True Access Tiles can be engineered to meet seismic requirements. Consult local code for any additional requirements or a licensed local engineer.

### Species & Finishes


For veneer options, 9Wood custom fast offers Plain Sliced (PS) Cherry, Walnut, White Maple, and Rift Sliced (RS) White Oak. Cherry and Maple can be easily stained to match standard or custom colors and typically Walnut and White Oak are coated with a simple clear matte finish. Opaque finishes can be requested- please contact 9wood for more information.

### System Weight

The 4600 True Access Tile weighs 3-4 lbs / sq ft.



# Typical Specifications

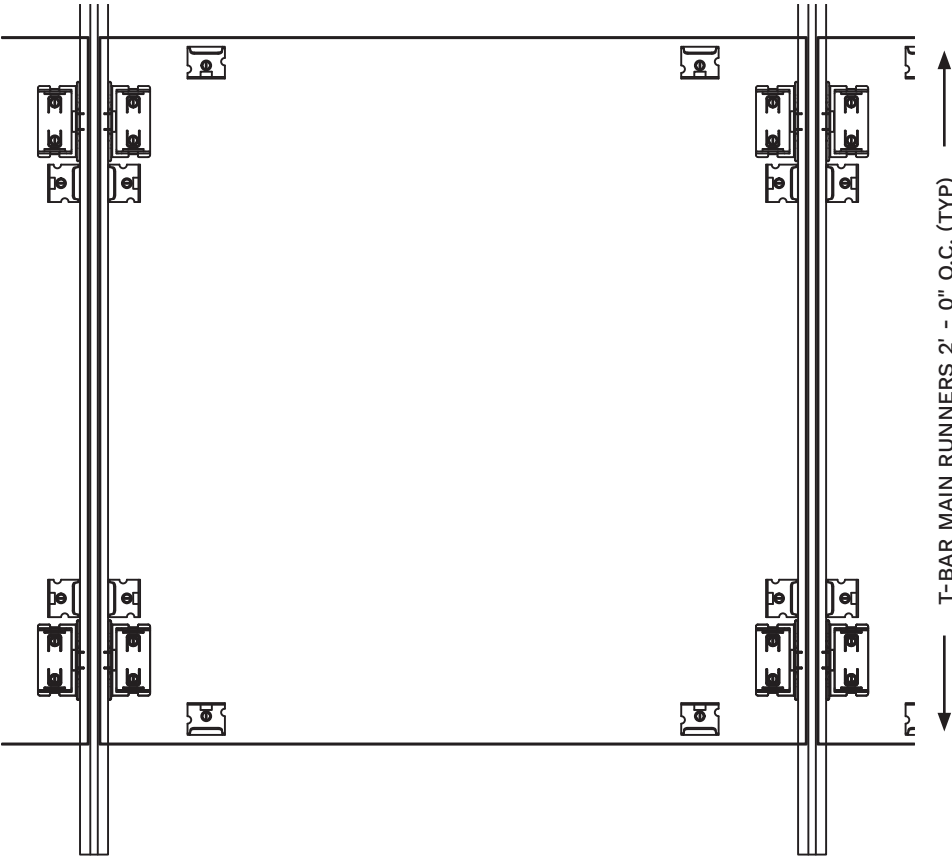


# SKU Table

Tile Width	Tile Length (Parallel to Grain Direction)	
	24"	48"
24"	4624-24	4624-48
48"		4648-48

Additional width, depth, and MLF options may be available. Please check with 9Wood if you don't see the combination that you have in mind.



## Perimeter Conditions and Suspension

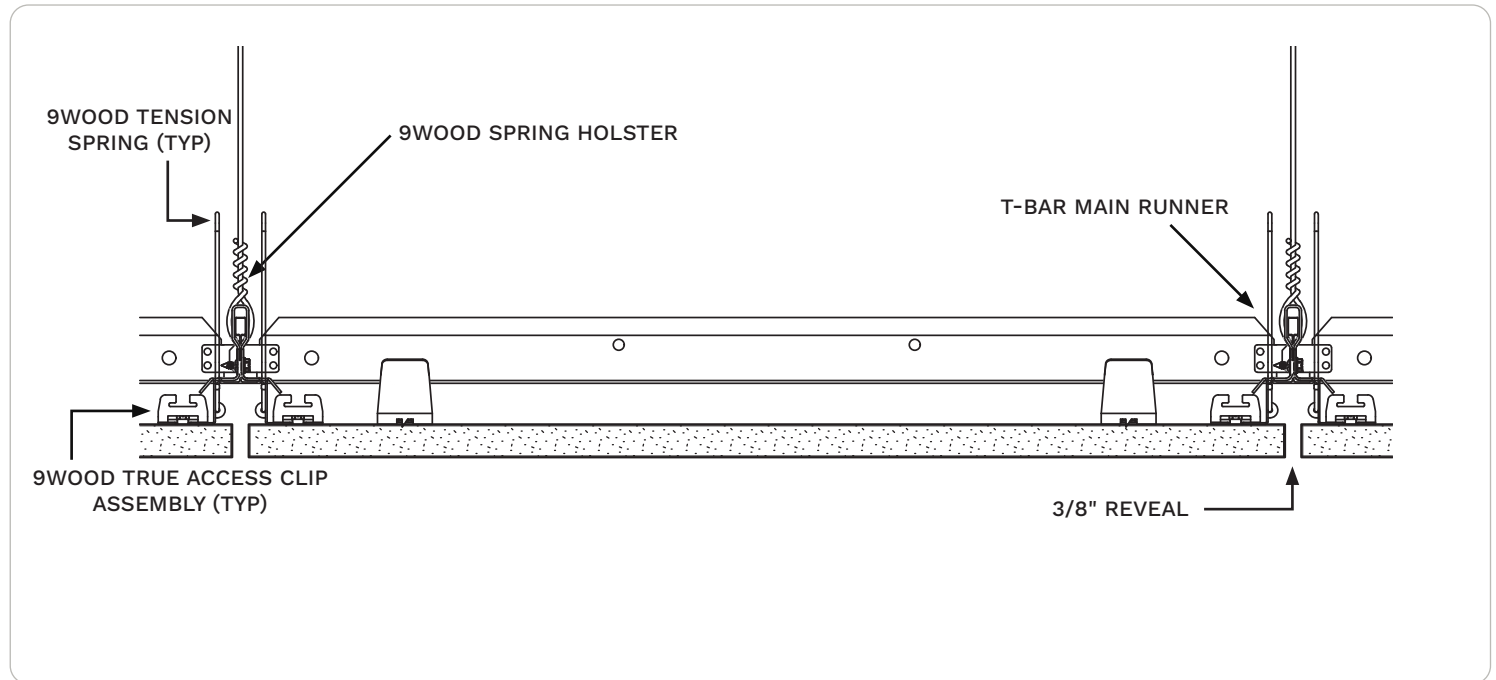

Custom  
made fast

[9wood.com](https://9wood.com)

999 South A Street  
Springfield, OR 97477  
Tel: 888-767-9990  
[sales@9wood.com](mailto:sales@9wood.com)

This information is for illustrative purposes only.  
The featured products and processes are specific  
to the project and should not be duplicated  
without consulting 9Wood. © 2025 9Wood