



DATA SHEET

4600 True Access Tile


Real Wood Veneer



4600 | TRUE ACCESS TILE | REAL WOOD VENEER

The 4600 True Access Tile wood ceiling offers a floating tiled appearance with downward access. The 4600 style snaps up into notched T-Bar brackets. A 3/8" reveal conceals suspension grid.

Attachment for the True Access Tile is via 9Wood's Tension Spring Clip and Spring Holster Clip.

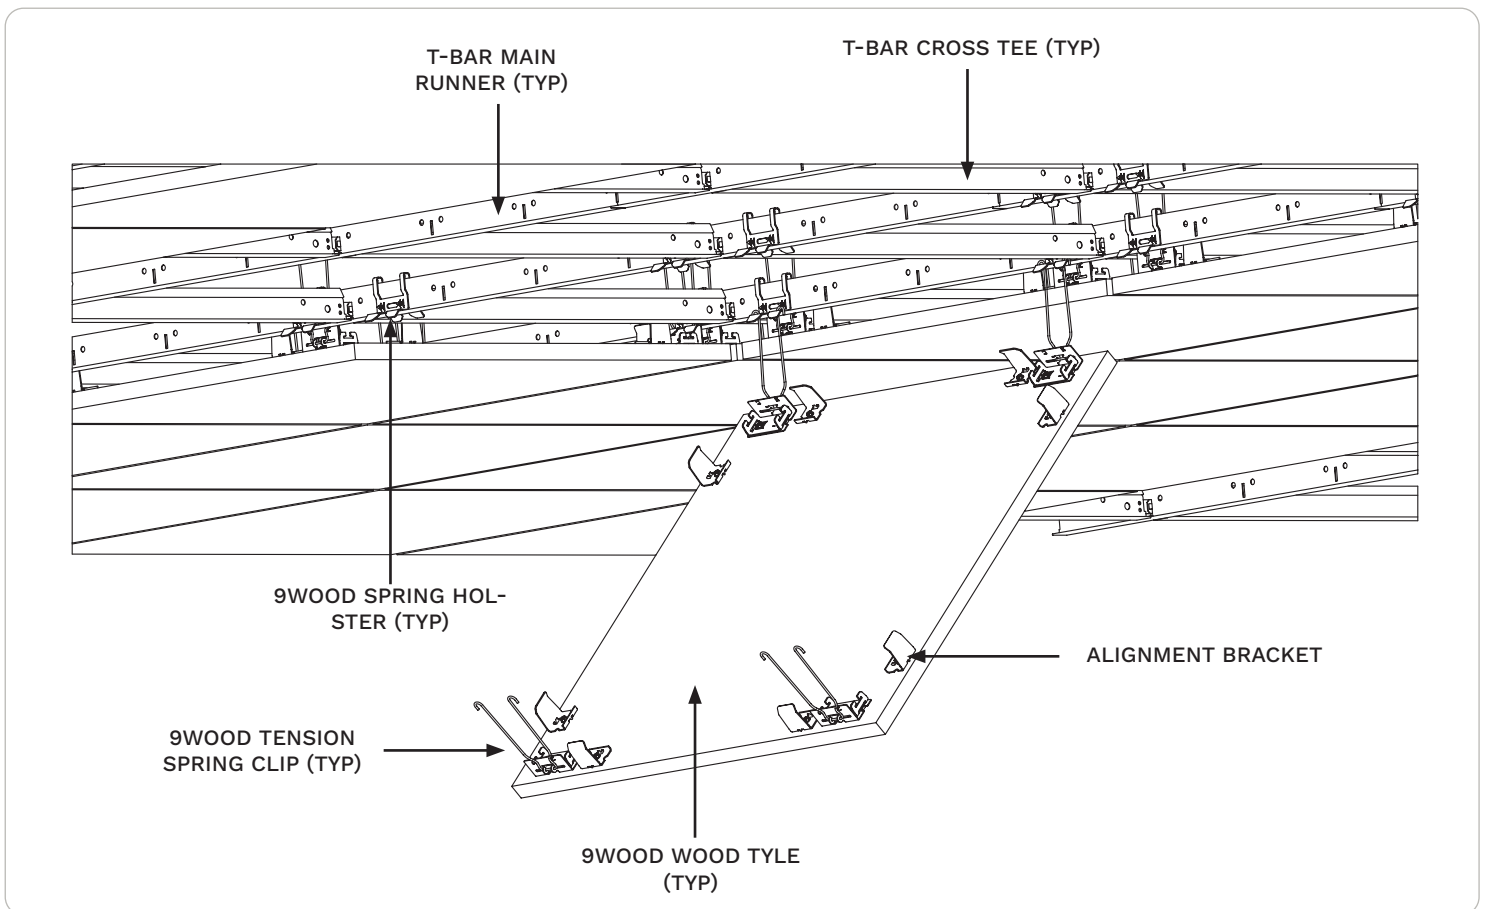



Application

The True Access Tile is engineered for seismic compliance and provides a floating tiled look with concealed suspension using real wood veneers on fire-rated cores. This is a fully, downward accessible system, with pull down, spring release accessibility.

Performance

Acclimatization

Wood Tile products must be cared for in a controlled interior environment (RH 25%-50% max; temp. 50°-85°) and installed only after reaching equilibrium moisture content. Should the building fall outside these limits consult 9Wood, Inc. for our 3 Tests/3 Tracks Acclimatization Advisory.

Acoustics

The 4600 style is considered acoustically reflective.

Fire Rating

Individual members use Fire Rated Particle board core and meet Class A per ASTM E84 & ASTM E2768

LEED

9Wood products may help contribute to LEED credits for: Material sourcing, Material ingredients, Low Emitting Materials, and Environmental Product Declarations. Credit support based on design choices, please contact 9Wood for more information.

Suspension

True Access Tiles are suspended from 9/16" heavy duty T-Bar main runners. Main runners are installed 2' on center, depending on system weight.

MEP

The 4600 tile permits MEP penetrations in the ceiling's surface. Cut panels may require supplemental reinforcement. Fixtures and diffusers must be independently supported.

Seismic

True Access Tiles can be engineered to meet seismic requirements. Consult local code for any additional requirements or a licensed local engineer.

Species & Finishes


For veneer options, 9Wood custom fast offers Plain Sliced (PS) Cherry, Walnut, White Maple, and Rift Sliced (RS) White Oak. Cherry and Maple can be easily stained to match standard or custom colors and typically Walnut and White Oak are coated with a simple clear matte finish. Opaque finishes can be requested but may take more time to dial in custom colors

System Weight

The 4600 True Access Tile weighs 3 lbs / sq ft.



Typical Specifications

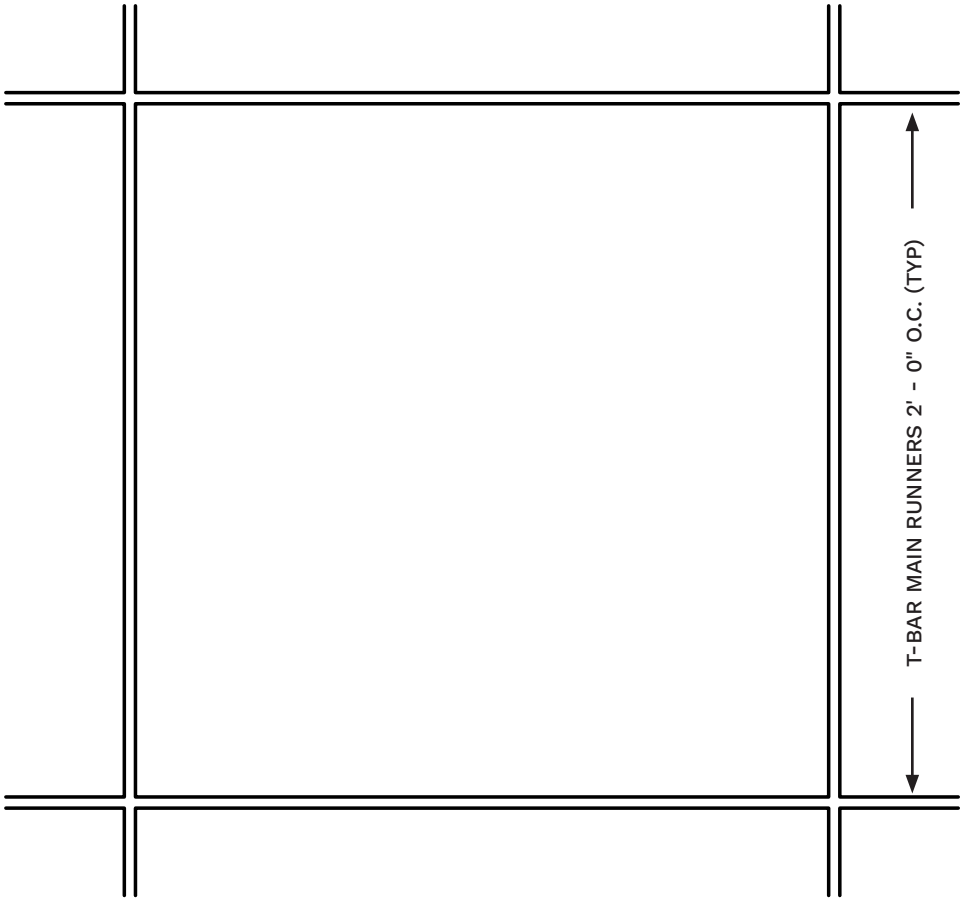


SKU Table

Tile Width	Tile Length (Parallel to Grain Direction)	
	24"	48"
24"	4624-24	4624-48
48"		4648-48

Additional width and length options may be available.
Please see 9wood.com for information on appropriate species selections.



Perimeter Conditions and Suspension

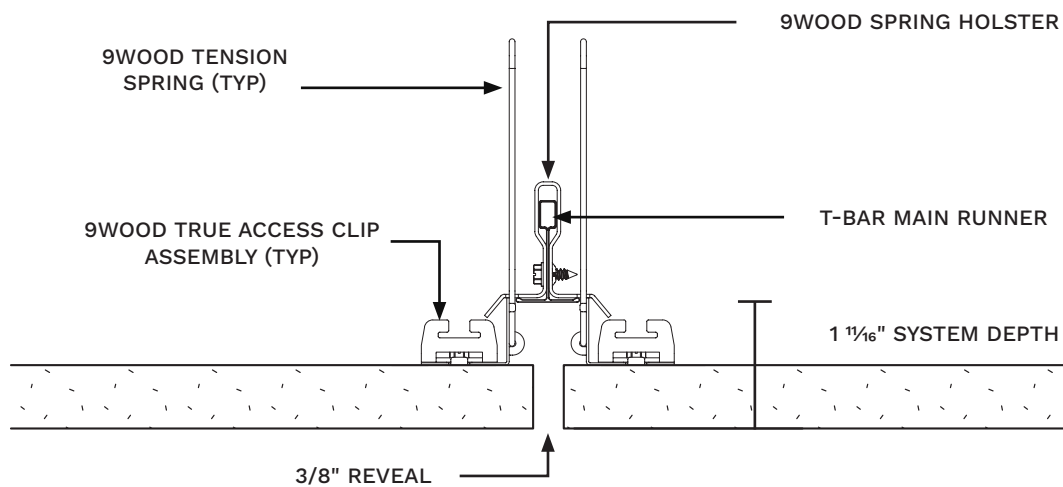

Custom
made fast

9wood.com

999 South A Street
Springfield, OR 97477
Tel: 888-767-9990

This information is for illustrative purposes only.
The featured products and processes are specific
to the project and should not be duplicated
without consulting 9Wood. © 2025 9Wood