

DATA SHEET

1800
True Access
Grille


Real Wood Veneer



1800 | TRUE ACCESS GRILLE | REAL WOOD VENEER

The 9Wood True Access Grille wood ceiling offers a design where the individual wood member is deeper than it is wide. The veneer panel width is 24", with lengths ranging from 2' to 10' in 1' increments.

Attachment for the True Access Grille is via 9Wood's Tension Spring Yoke and Spring Holster.

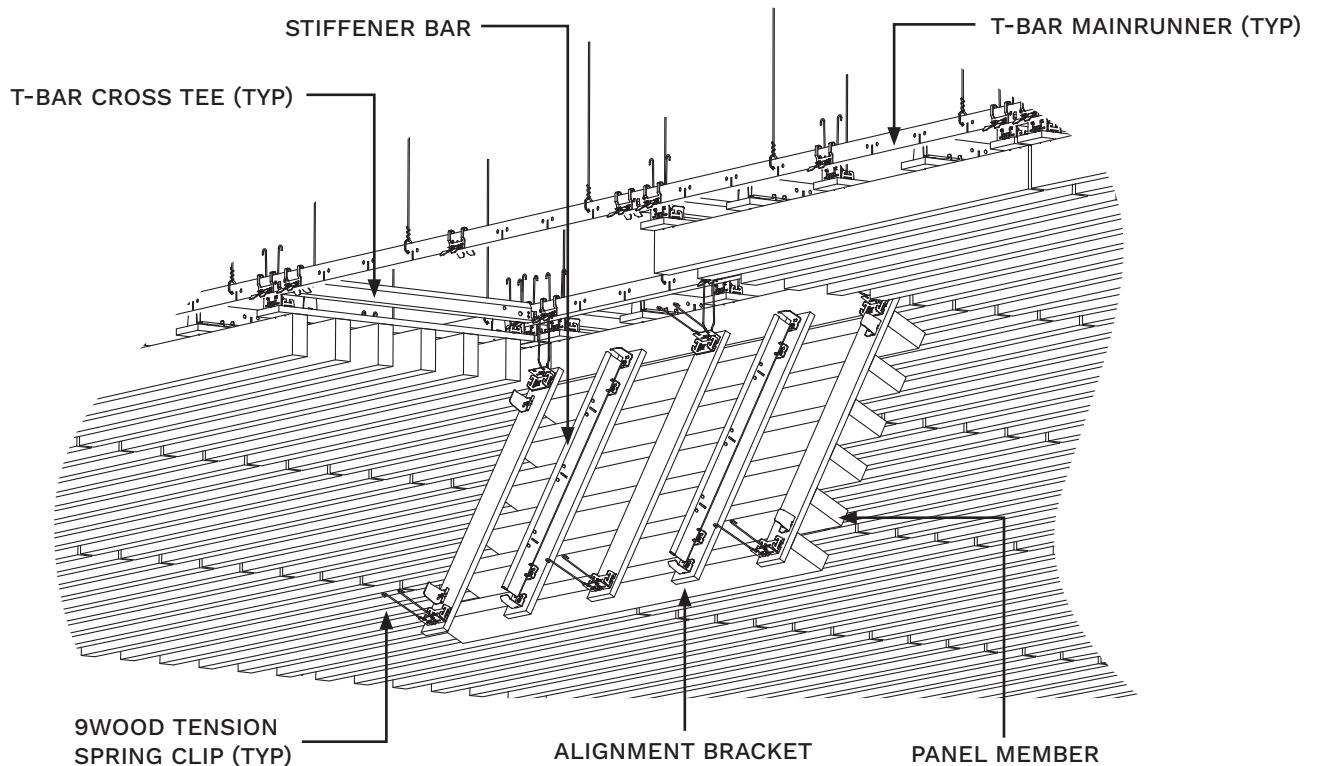



Application

The Dowel/Cross Piece Grille uses a pre-assembled panel fabrication process. This product can be installed throughout the country and is the preferred design in areas requiring seismic compliance. Panel access is available by means of removing attachment screws hidden in reveals. Repeated removal requires threaded 9Wood Caddy-Lock attachment as opposed to screws.

Performance

Acclimatization

True Access Grilles must be cared for in a controlled interior environment (RH 25%-55% max; temp. 60°-80°) and installed only after reaching equilibrium moisture content.

Acoustics

The True Access Grille can enhance acoustics via sound absorbing material placed over open reveals within the T-Bar grid. Insulation is typically provided locally.

Fire Rating

Individual members are treated with Fire Rated Patrival board core and meet Class A per ASTM E84 & ASTM E2768.

LEED

True Access Grilles may help contribute to LEED credits for: Material sourcing, Material ingredients, Low Emitting Materials, and Environmental Product Declarations. Credit support based on design choices, please contact 9Wood for more information.

Suspension

True Access Grilles are clipped onto 15/16" heavy duty T-Bar main runners. Main runners are typically 2' on center, depending on panel weight.

MEP

The True Access Grille permits MEP penetrations in the ceiling's surface. Cut panels may require supplemental reinforcement. Fixtures and diffusers must be independently supported.

Seismic

True Access Grilles provide seismic code compliance by means of mechanical direct screw attachment to T-Bar via the cross-piece backer. Please consult local code or a licensed engineer for any additional requirements.

Species & Finishes

For veneer options, 9Wood custom fast offers Plan Sliced (PS) Cherry, Walnut, White Maple, and Rift Sliced (RS) White Oak. Cherry and Maple can be easily stained to match standard or custom colors and typically Walnut and White Oak are coated with a simple clear matte finish. Opaque finishes can be requested but may take more time to dial in custom colors.


System Weight

True Access Grilles typically weigh 2-4 pounds per square foot, depending on members per linear foot and species.

TRUE ACCESS GRILLE | REAL WOOD VENEER



Typical Specifications

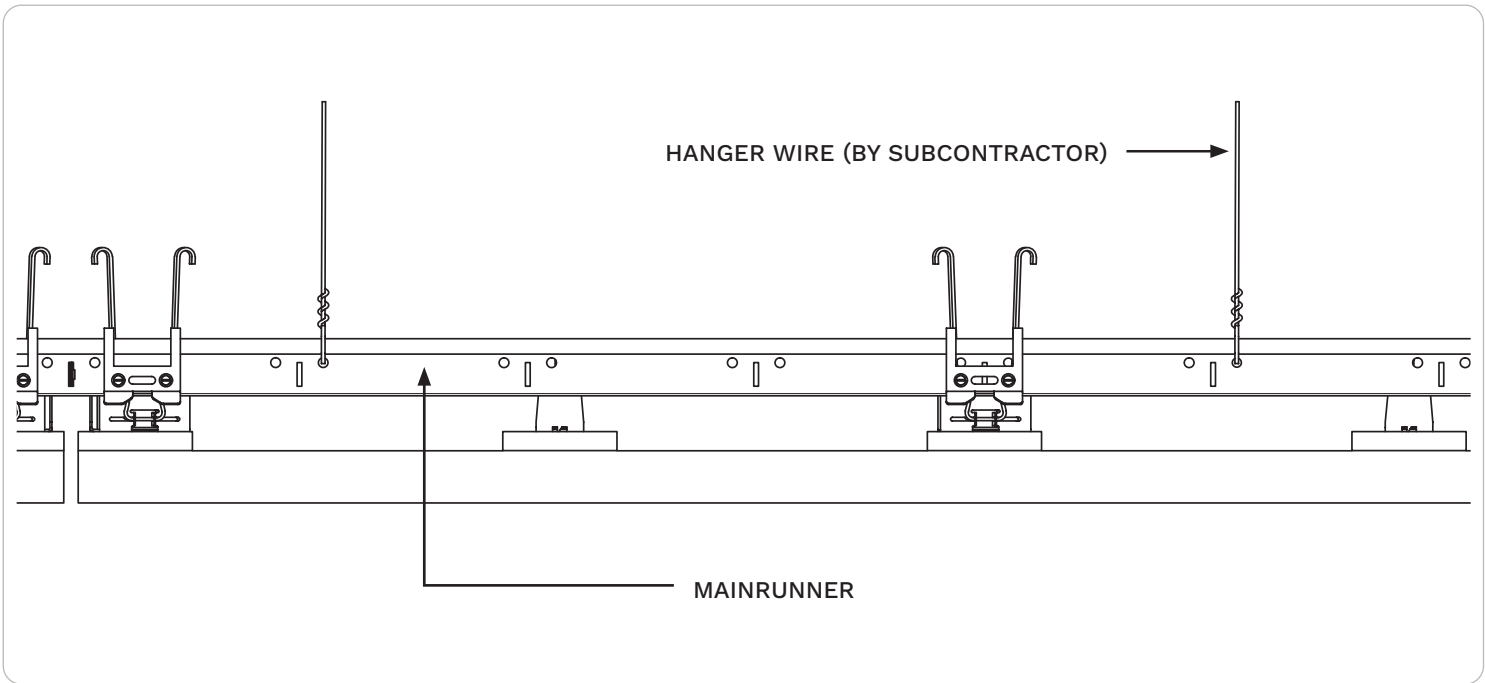

SKU Table

Width	Depth	Grille Members per Linear Foot						
		2	3	4	5	6	7	8
¾"	1 ⅜"	18-1112-2	18-1112-3	18-1112-4	18-1112-5	18-1112-6	18-1112-7	18-1112-8
¾"	2 ¼"	18-1113-2	18-1113-3	18-1113-4	18-1113-5	18-1113-6	18-1113-7	18-1113-8
¾"	3 ¼"	18-1114-2	18-1114-3	18-1114-4	18-1114-5	18-1114-6		
¾"	5 ¼"	18-1116-2						

Additional width, depth, and MLF options may be available.
Please see 9wood.com for information on appropriate species selections.



Perimeter Conditions and Suspension

