

*The Trolley Stop*

DATA SHEET

1800  
True Access  
Grille

Solid Wood






# 1800 | TRUE ACCESS GRILLE | SOLID WOOD

The 9Wood True Access Grille wood ceiling offers a design where the individual wood member is deeper than it is wide. The solid wood panel width is 24", with lengths ranging from 2' to 10' in 1' increments.

Attachment for the True Access Grille is via 9Wood's Tension Spring Yoke and Spring Holster.

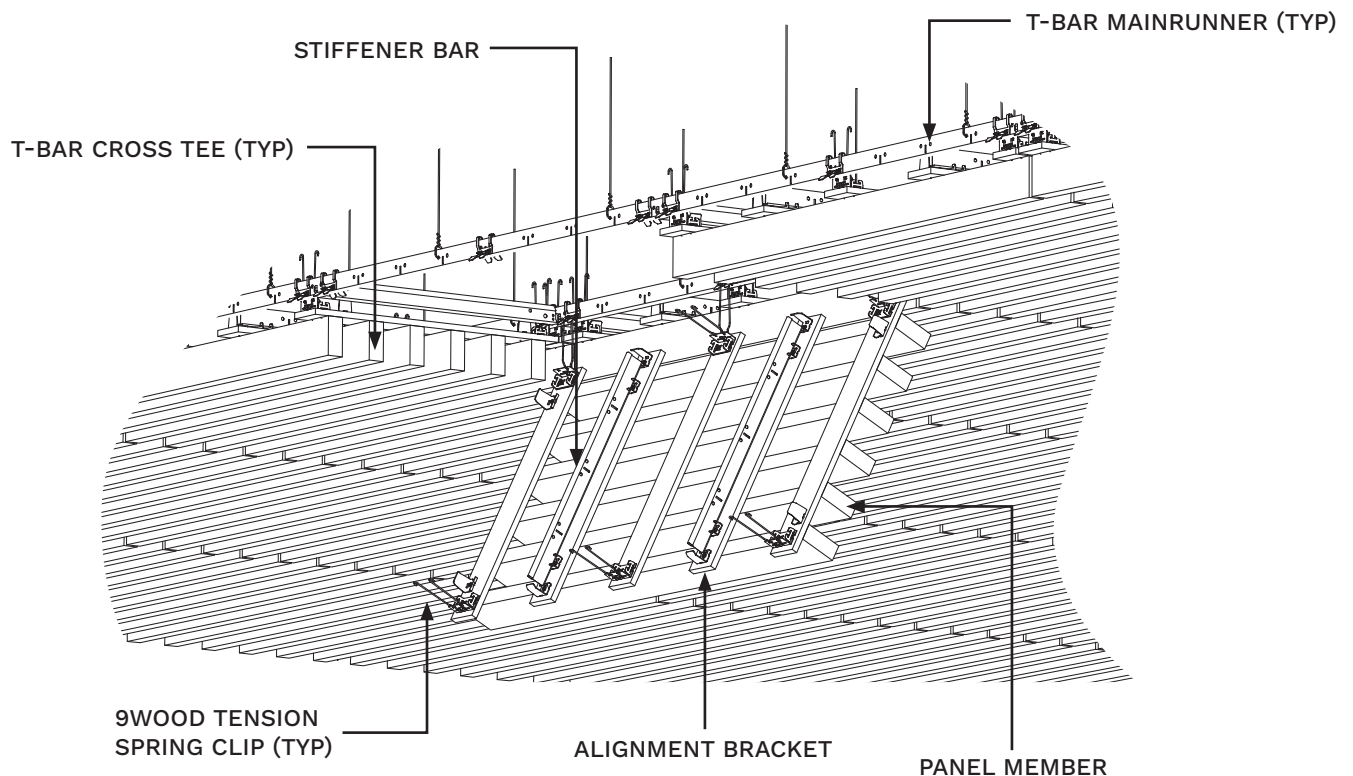



## Application

The True Access Grille uses a pre-assembled panel fabrication process. This product can be installed throughout the country and is the preferred design in areas requiring full ceiling toolless access. This is an accessible system, with pull down, spring release accessibility.

## Performance

### Acclimatization

True Access Grilles must be cared for in a controlled interior environment (RH 25%-55% max; temp. 60°-80°) and installed only after reaching equilibrium moisture content.

### Acoustics

The True Access Grille can enhance acoustics via sound absorbing material placed over open reveals within the T-Bar grid. Insulation is typically provided locally.

### Fire Rating

Individual members are treated with Class A Fire Retardant chemicals. Cross Piece backers are made from Fire-Retardant-Treated Wood.

### LEED

True Access Grilles may help contribute to LEED credits for: Material sourcing, Material ingredients, Low Emitting Materials, and Environmental Product Declarations. Credit support based on design choices, please contact 9Wood for more information.

### Suspension

True Access Grilles are clipped onto 15/16" heavy duty T-Bar main runners. Main runners are typically 2' on center.

### MEP

The True Access Grille permits MEP penetrations in the ceiling's surface. Cut panels may require supplemental reinforcement. Fixtures and diffusers must be independently supported.

### Seismic

True Access Grilles provide seismic code compliance by means of mechanical direct screw attachment to T-Bar via the cross-piece backer. Please consult local code or a licensed engineer for any additional requirements.

### Species & Finishes


For custom fast solid wood ceilings 9Wood uses Western Hemlock which can be stained to match any standard stain or custom color option. Stable prices and consistent availability mean Western Hemlock brings the most value for you as the customer. Opaque finishes can be requested but may take more time to dial in custom colors.

### System Weight

True Access Grilles typically weigh 2-4 pounds per square foot, depending on members per linear foot and species.



## Typical Specifications

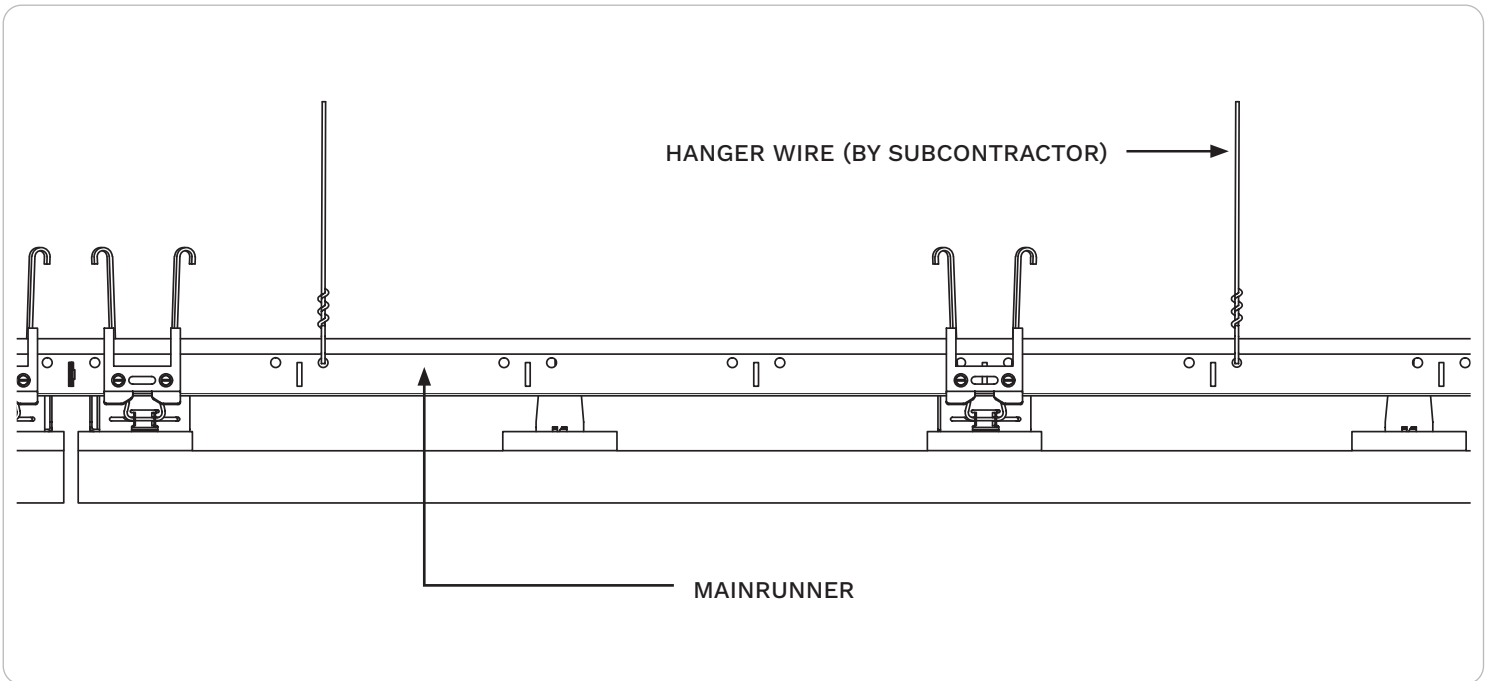

## SKU Table

Width	Depth	Grille Members per Linear Foot						
		2	3	4	5	6	7	8
3/4"	1 3/8"	18-1112-2	18-1112-3	18-1112-4	18-1112-5	18-1112-6	18-1112-7	18-1112-8
3/4"	2 1/4"	18-1113-2	18-1113-3	18-1113-4	18-1113-5	18-1113-6	18-1113-7	18-1113-8
3/4"	3 1/4"	18-1114-2	18-1114-3	18-1114-4	18-1114-5	18-1114-6		
1 3/8"	2 1/4"	18-1123-2	18-1123-3	18-1123-4	18-1123-5	18-1123-6		

Additional width, depth, and MLF options may be available.  
Please see 9wood.com for information on appropriate species selections.



## Perimeter Conditions and Suspension

