

DATA SHEET

2300
Continuous
Linear


Real Wood Veneer



2300 | CONTINUOUS LINEAR | REAL WOOD VENEER

The 9Wood Continuous Linear wood ceiling features an open reveal linear design, where each individual wood member is wider than it is deep. The layout is structured around a 12" module. It uses veneer with matching edgebanding, available in 8' lengths.

Attachment for the Continuous Linear is via progressive install, utilizing the 9Wood, Inc. Speed Lock™ clip.

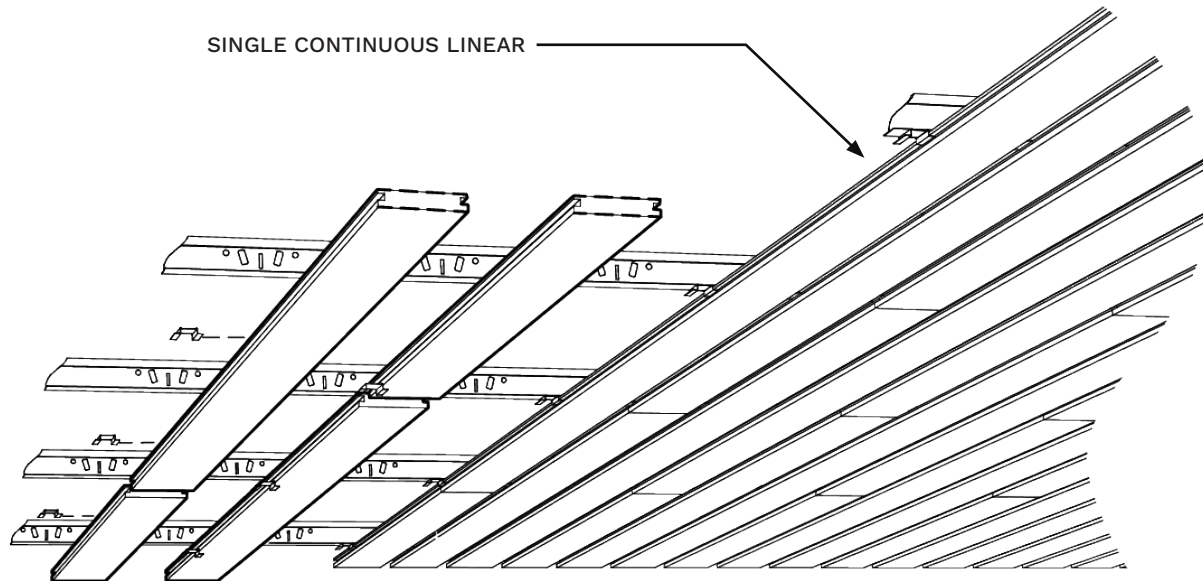



Application

The Continuous Linear provides the classic open-reveal continuous linear appearance, creating a monolithic ceiling field. Access can be achieved through strategically located access panels or from room perimeters. Members are clipped to T-Bar main runners progressively.

Performance

Acclimatization

Continuous Linears must be cared for in a controlled interior environment (RH 25%-55% max; temp. 60°-80°) and installed only after reaching equilibrium moisture content.

Acoustics

The Continuous Linear can enhance acoustics via sound absorbing material placed over open reveals within the T-Bar grid. Insulation is typically provided locally.

Fire Rating

Individual members use Fire Rated Particle board core and meet Class A per ASTM E84 & ASTM E2768.

LEED

Continuous Linears may help contribute to LEED credits for: Material sourcing, Material ingredients, Low Emitting Materials, and Environmental Product Declarations. Credit support based on design choices, please contact 9Wood for more information.

Suspension

Continuous Linears are directly attached to 15/16" heavy duty T-Bar main runners. Main runners are typically 2' on center.

MEP

The Continuous Linear permits MEP penetrations in the ceiling's surface. Cut panels may require supplemental reinforcement. Fixtures and diffusers must be independently supported.

Seismic

Continuous Linears provide seismic code compliance by means of clips with mechanical direct screw attachment to T-Bar via the cross-piece backer. Please consult local code or a licensed engineer for any additional requirements.

Species & Finishes


For veneer options, 9Wood custom fast offers Plain Sliced (PS) Cherry, Walnut, White Maple, and Rift Sliced (RS) White Oak, Cherry and Maple can be easily stained to match standard or custom colors and typically Walnut and White Oak are coated with a simple clear matte finish. Opaque finishes can be requested but may take more time to dial in custom colors.

System Weight

Continuous Linears typically weigh 2-4 pounds per square foot, depending on members per linear foot and species.



Typical Specifications

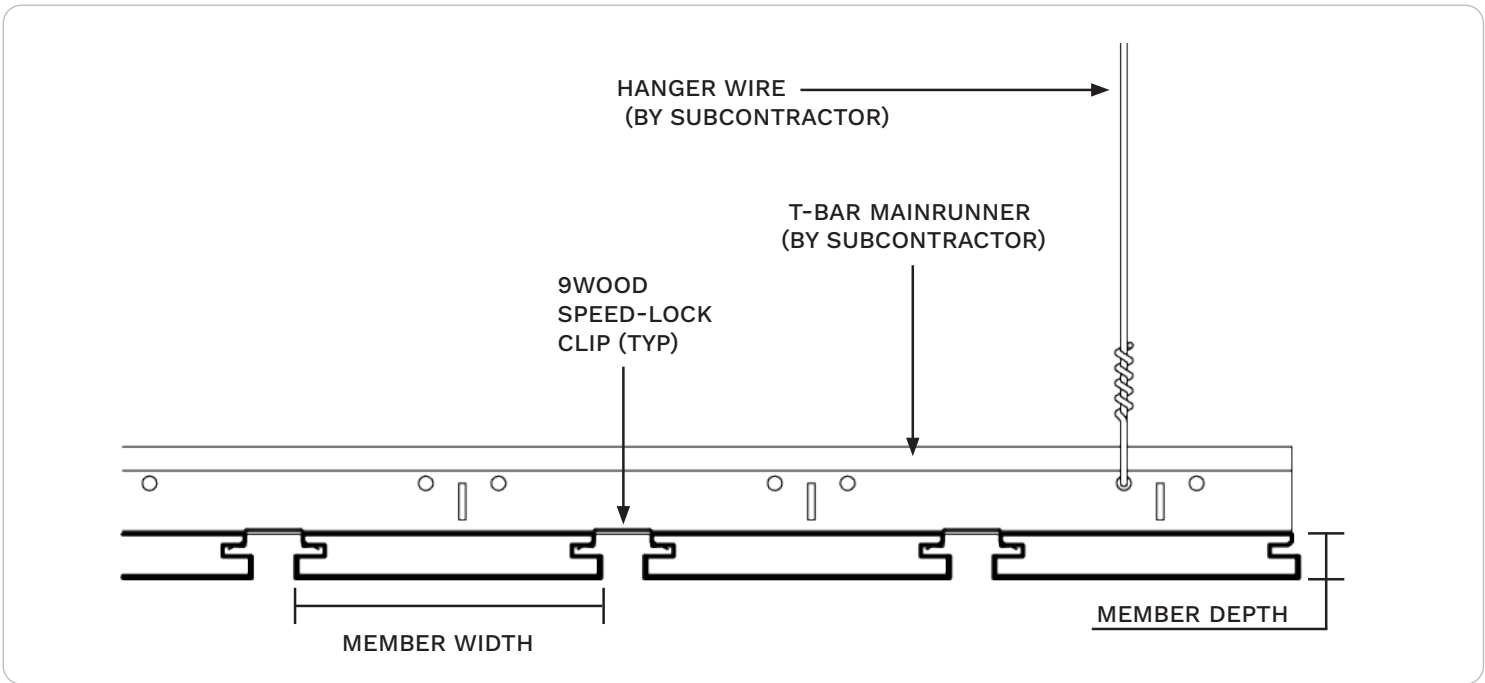

SKU Table

Width	Depth	Members per Linear Foot	
		2	3
3/4"	1 3/8"	2314-3	
3/4"	2 1/4"	2316-2	

Additional width, depth, and MLF options may be available.
Please see 9wood.com for information on appropriate species selections.



Perimeter Conditions and Suspension

