



DMA 25 / DMA 50

DMA desktop series

DMA TESTING HAS NEVER BEEN SO SIMPLE!

DMA 25 / DMA 50

are desktop DMA offering a high force range and outstanding flexibility from glass transition determination to immersed tests, which makes them powerful thermomechanical testing platforms.

metravib-materialtesting.com




MAIN ASSETS

- High force: 25 / 50 Newtons (peak)
- Broad frequency range: from 1E-5Hz to 200 Hz
- Broad temperature range: from -150°C to 600°C
- Analysis of specimens with sizes representative of the materials structure
- High performance auto-tension mode (coupled static/dynamic control) for film and 3-points bending modes
- Thermal chamber with window
- Reversible frame
- Specimens immersion possible with all test modes at no extra cost
- Easy to use
- Can be used with a single power line connection
- Low price.

MAIN USES

- DMA, TMA, simultaneous DMA/TMA tests with DYNATEST software
- Determination of glass & secondary transitions
- Particularly well suited to polymers & composites
- Analysis of films and specimens with small stiffnesses
- Tests on materials immersed in a liquid
- R&D / Quality control
- Education / Lab work.

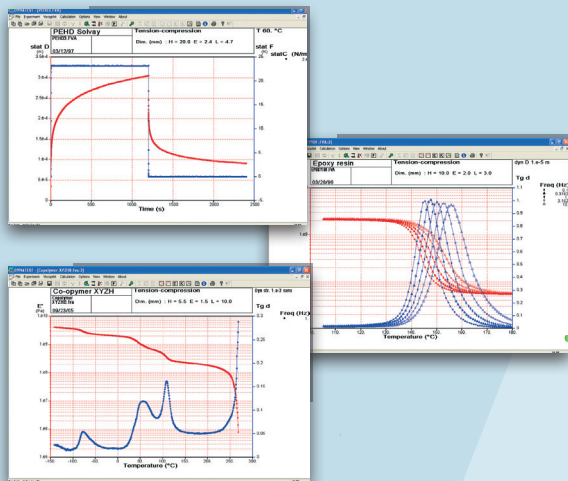

PRECISE

With optimal metrological solutions, innovating dynamic & static control algorithms,

DMA 25 / DMA 50 guarantee an accurate control of all parameters influencing measurement quality.


HIGH FORCE

DMA 25 / DMA 50 include a dedicated electrodynamic actuator (ACOEM), specifically designed to meet DMA requirements.

This gives **DMA 25 / DMA 50** a great flexibility regarding the material's change of mechanical behavior versus temperature, & the capacity to analyze specimens with sizes that are representative of materials structure, for either dynamic tests or static tests (creep, TMA).

ERGONOMICS

The motorized opening/closing thermal chamber allows large clearance and free access to the specimen, as well as very comfortable handling conditions for the operator.

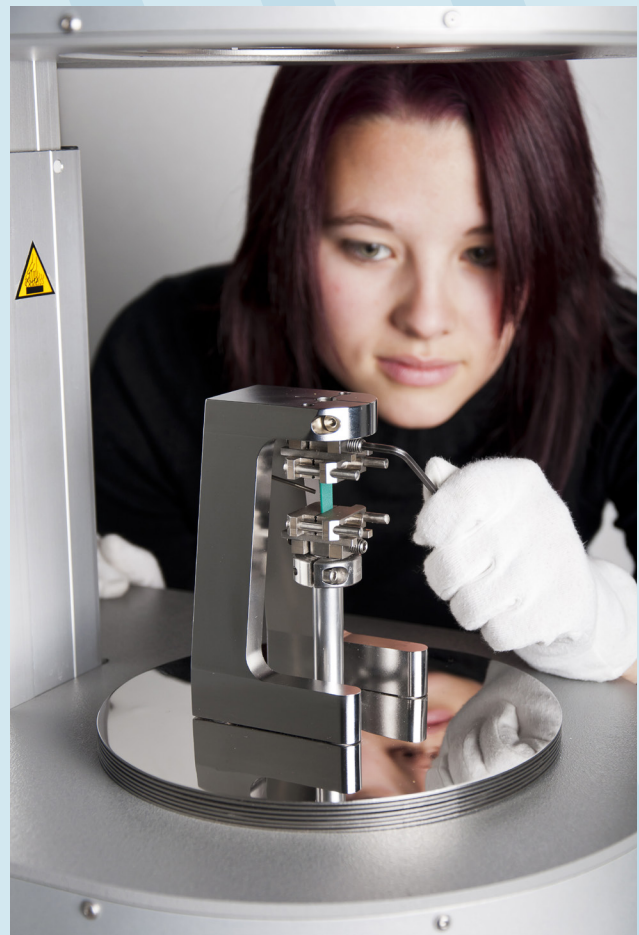


CUSTOMIZABLE AND UPGRADEABLE

DMA 25 / DMA 50 allow configuring an additional channel to facilitate analysis coupled with the DMA test: temperature, hygrometry, oxygen, gas atmo-sphere, etc. DMA 25 can be upgraded into DMA 50, if larger force capabilities are required.

SUITED TO EACH MATERIAL

A range of 8 specimen holders allows different excitation types (tension, compression, bending and shear) for a great variety of materials of very diverse shapes: fibers, films, plates, cylinders, pasty materials, etc.

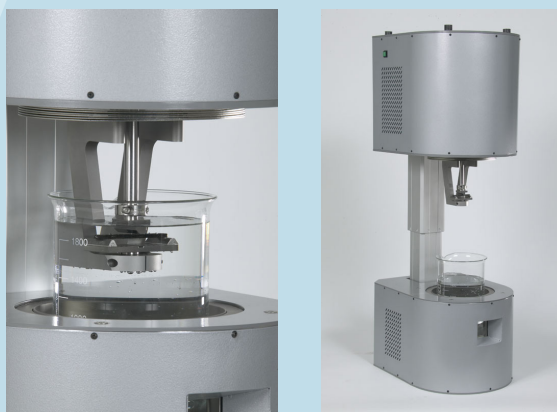

Composite material tested in a solvent bath.

EASY AND COST-EFFECTIVE

DMA 25 / DMA 50 are cost-attractive platforms for thermal and mechanical characterization. They can be used in any room equipped with a single electrical outlet. For subambient working conditions, DMA 25 / DMA 50 can be coupled to either a cryogenic source, or an air chiller.

DMA 25 / DMA 50's productivity is enhanced by automatic test sequencing capabilities of DYNATEST software.

VERSATILE AND FLEXIBLE

Flexible operating modes allow routine DMA & TMA tests, as well as the definition of specific tests combining multiple parameter settings.

Depending on the test configuration, the position of the mechanical frame can be easily reversed.

For tests requiring the specimen to be immersed in liquid, this function is particularly effective, since it allows to use all the available specimen-holders, regardless of the test mode without requiring the purchase of expensive additional accessories.

MAIN SPECIFICATIONS

Frequency range	1E-5 Hz to 200 Hz	Materials	Elastomers, thermoplastic polymers, thermosets, composites, biomaterials, foods...
Dynamic force (max) DMA 25	50N peak to peak		Excitation modes & specimen holders
Dynamic force (max) DMA 50	100N peak to peak	Shear for pasty materials & curing follow-up	
Dynamic force (max - option) DMA 25	100N peak to peak	Indentation set	
Dynamic displacement (max)	6 mm peak to peak	Installation & connections	Height x Width x Depth: 1000 mm x 300 mm x 400 mm
Temperature range	room to 500°C		Weight: 40 kg
Temperature range (option 1)	min. -150 °C	Power: 230 Volts single phase	
Temperature range (option 2)	max. 600 °C		
Hygrometry control (option)			
Modulus (Pa)	1E3 to 3E12		
Tan delta resolution	0.00001		