

BAILLARGEON® SERIES
Hollow (Extra Heavy Duty)
9500-ME (5 ply)

FORTE
OPENING SOLUTIONS

FOR INTENSIVE USE

A STILES: 1/8" (3 mm) thick veneer,

longitudinally laminated by hot pressing with type 1 structural glue, (LVL), including a 7/8" (22 mm) piece of hardwood, matched with faces, for a total width of 4 3/16" (107 mm).

B TOP AND BOTTOM RAILS: 1/8" (3 mm)

thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, (LVL) or laminated strand lumber (LSL), for a total width of 3 5/16" (85 mm).

C CORE: 4 3/4" (120 mm)

honeycomb. (100% recycled).

D FACES: Wood veneer (choice of

face veneers; 2 ply plywood), fiber board panel or plastic laminate glued to composite crossband.

LOCK BLOCK: Integrated.

GLUE: Type 1 PVA Cross-link.

INTERIOR use

WARRANTY: 3 years.

NOTE

- Dimensions are nominal before trimming.

OPTIONS


- STC sound rating not available.

LEED CONTRIBUTION OPTIONS


- EPD
- LEED V4.1
- Recycled content
- FSC
- ULEF

PERFORMANCE MEASUREMENT

- ANSI/WDMA 1.S.1A
- ASTM-D1037 and 198-98 (LSL)
- ASTM-D5456-93 (LVL)
- AWS

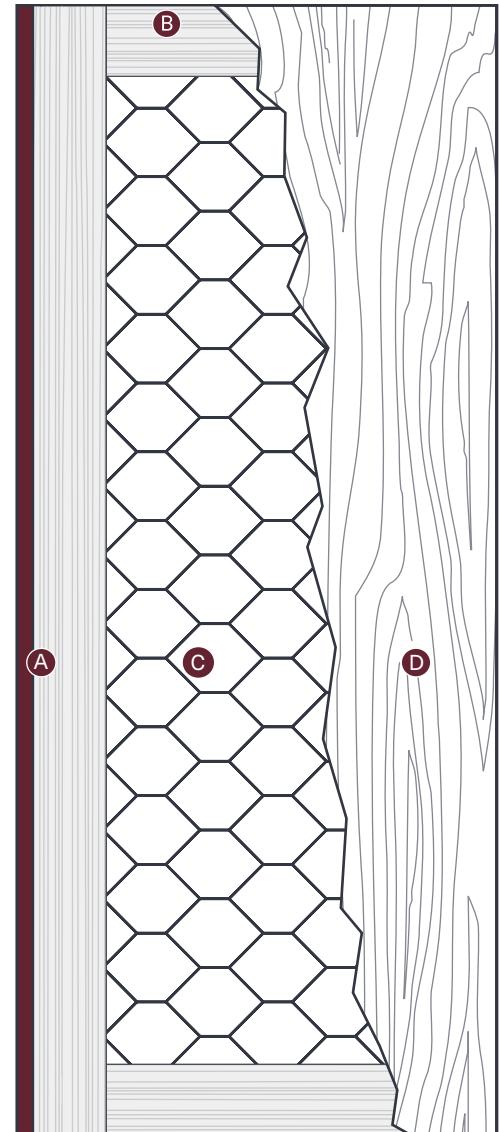

A STILES ME

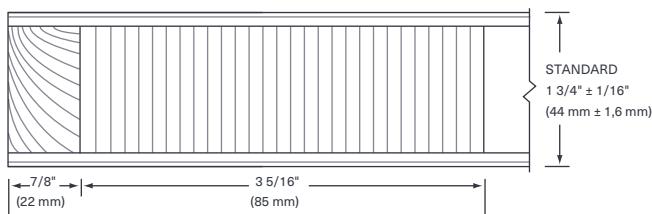

B RAILS

