BAILLARGEON® SERIES

Hollow (Extra Heavy Duty)

9100-MO (5 ply)

FORTE
OPENING SOLUTIONS

FOR INTENSIVE USE

- **A** **STILES:** 1 3/16" (30 mm) clear, finger-jointed, low-density wood.
- **B** **TOP AND BOTTOM RAILS**: 1 3/16" (30 mm) low-density wood or SCL, (LVL) or laminated strand lumber (LSL), manufacturer's choice.
- **C** **CORE:** 4 3/4" (120 mm) honeycomb. (100% recycled).
- **D** **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), fiber board or plastic laminate glued to composite crossband.

LOCK BLOCK: Lock materials manufacturer's choice. Low-density wood parts 4 1/4" (108 mm) wide x 20" (508 mm) long (including stile).

GLUE: Type 1 PVA Cross-link.

INTERIOR use

WARRANTY: 3 years.

NOTE

- Dimensions are nominal before trimming.

OPTIONS


- Lock block on both sides.
- STC sound rating not available.

LEED CONTRIBUTION OPTIONS


- EPD
- LEED V4.1
- Recycled content
- FSC
- ULEF

PERFORMANCE MEASUREMENT


- ANSI/WDMA 1.S.1A
- ASTM-D1037 and D198-98 (LSL)
- ASTM-D5456-93 (LVL)
- AWS

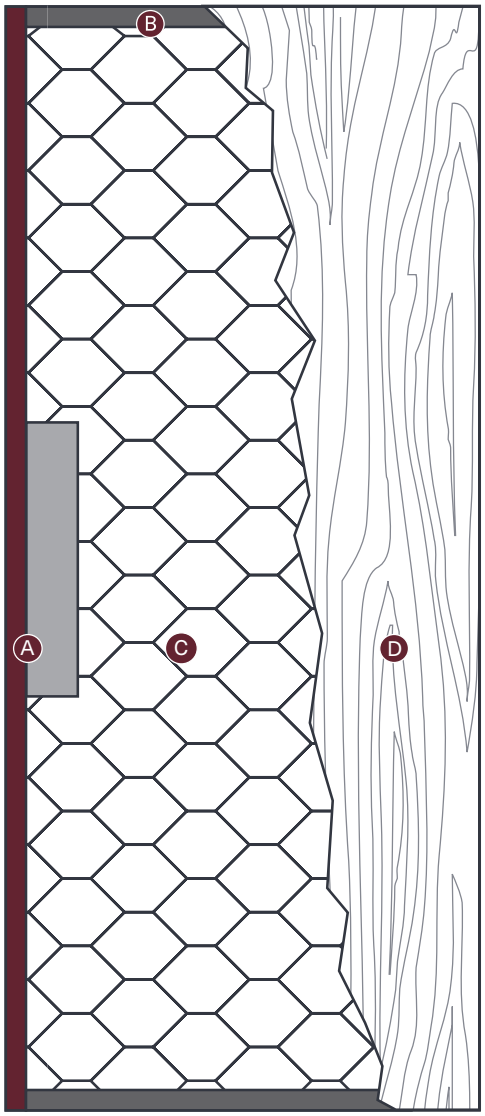

A STILES MO

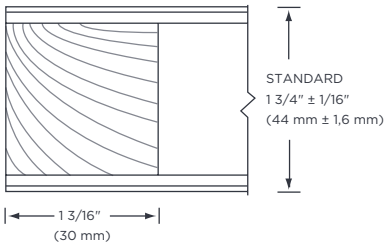

B RAILS



forteopenings.com
IBP Solutions Canada Inc. dba Forte Opening Solutions