

**BAILLARGEON® SERIES**  
**Hollow (Extra Heavy Duty)**  
**9100-ME (5 ply)**

**FORTE**  
OPENING SOLUTIONS

**FOR INTENSIVE USE**

**A STILES:** 1 3/16" (30 mm) clear, finger-jointed, low-density wood.

**B TOP AND BOTTOM RAILS:** 1 3/16" (30 mm) low-density wood or SCL, (LVL) or laminated strand lumber (LSL), manufacturer's choice.

**C CORE:** 4 3/4" (120 mm) honeycomb. (100% recycled).

**D FACES:** Wood veneer (choice of face veneers; 2 ply plywood), fiber board or plastic laminate glued to composite crossband.

**LOCK BLOCK:** Lock materials manufacturer's choice. Low-density wood parts 4 1/4" (108 mm) wide x 20" (508 mm) long (including stile).

**GLUE:** Type 1 PVA Cross-link.

**INTERIOR** use

**WARRANTY:** 1 year.

**NOTE**

- Dimensions are nominal before trimming.

**OPTIONS**


- Lock block on both sides.
- STC sound rating not available.

**LEED CONTRIBUTION OPTIONS**


- EPD
- LEED V4.1
- Recycled content
- FSC
- ULEF

**PERFORMANCE MEASUREMENT**

- ANSI/WDMA 1.S.1A
- ASTM-D1037 and D198-98 (LSL)
- ASTM-D5456-93 (LVL)
- AWS

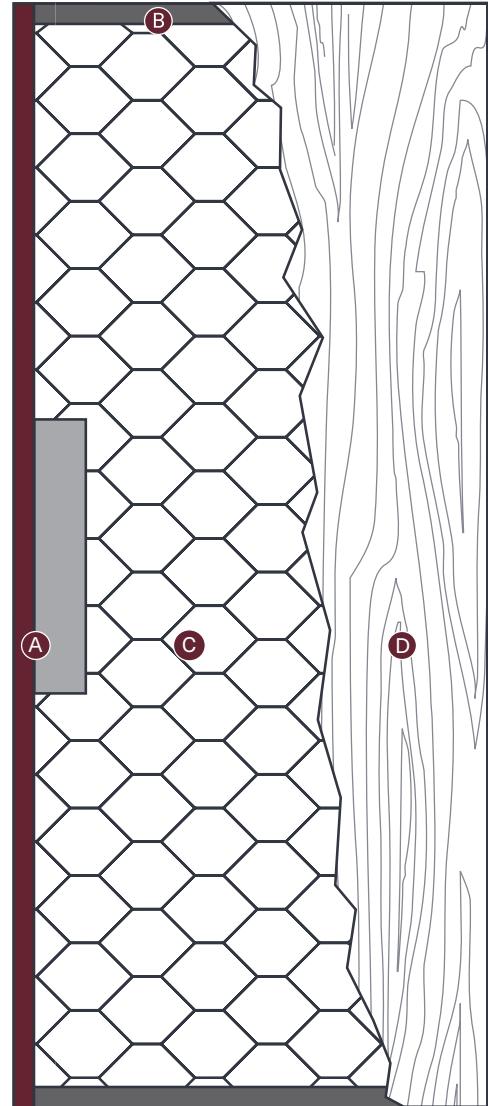

**A STILES ME**

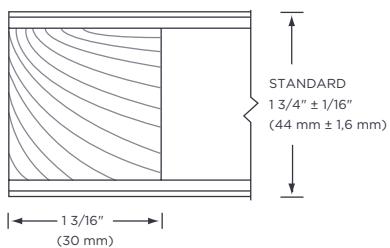

**B RAILS**

