

LSL (LAMINATED STRAND LUMBER)

CORE, FOR INTENSIVE USE

A STILES: 7/8" (22 mm) wide hardwood, matched with faces. Bonded to core.

B TOP AND BOTTOM RAILS: Integrated

C CORE: Laminated strand lumber (LSL).

D FACES: Wood veneer (choice of face veneers; 2-ply plywood), fiber board panel or plastic laminate glued to composite crossband.

LOCK BLOCK: Integrated.

GLUE: Type 1 PVA Cross-link.

USAGE: Interior Only

WARRANTY: Lifetime

WARNING

- Pre-machining must be done in factory or by an authorized distributor in order to maintain our warranty and comply with W/H requirements (see NFPA 80).
- Certain applications may require hardware reinforcement. Pilot holes required.

NOTE

- Dimensions are nominal before trimming.

OPTIONS

- 20-min. fire rating, specify 6020-ME.

SOUND RATED OPTION

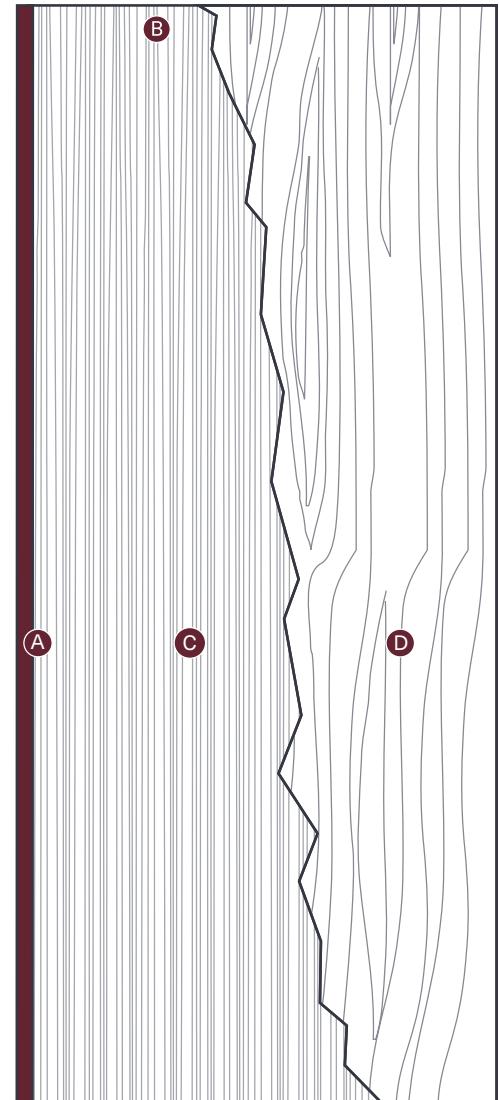
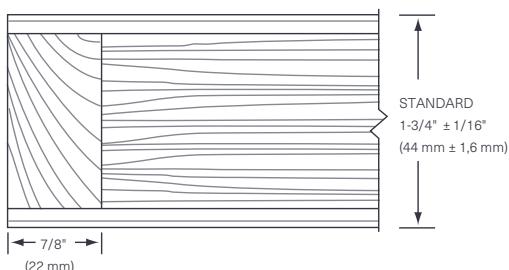
- Available 31dB depending on configuration of soundproofing hardware.
- For optimization, see our soundproof construction.

LEED CONTRIBUTION OPTIONS

- EPD
- Recycled content
- LEED V4.1
- FSC
- ULEF

PERFORMANCE MEASUREMENT

- ANSI/WDMA 1.S.1A
- ASTM-D1037 and 198-98 (LSL)
- AWS
- Intertek WH-ETL
- NFPA 80

**A STILES ME****B INTEGRATED RAILS**