

Model 110

Fire-rated, low profile.


Integral threaded nut positions glass for quick installation.

Fasteners hidden on one face of frame.

Max pocket is 1.125" in 1.75" door. (Not recommended for IGU's)



This frame may be installed with most fire-rated glazing material that has approval for conformance to ANSI/UL 10B, ANSI/UL 10C, NFPA 80, NFPA 252, or CAN/ULC S104.

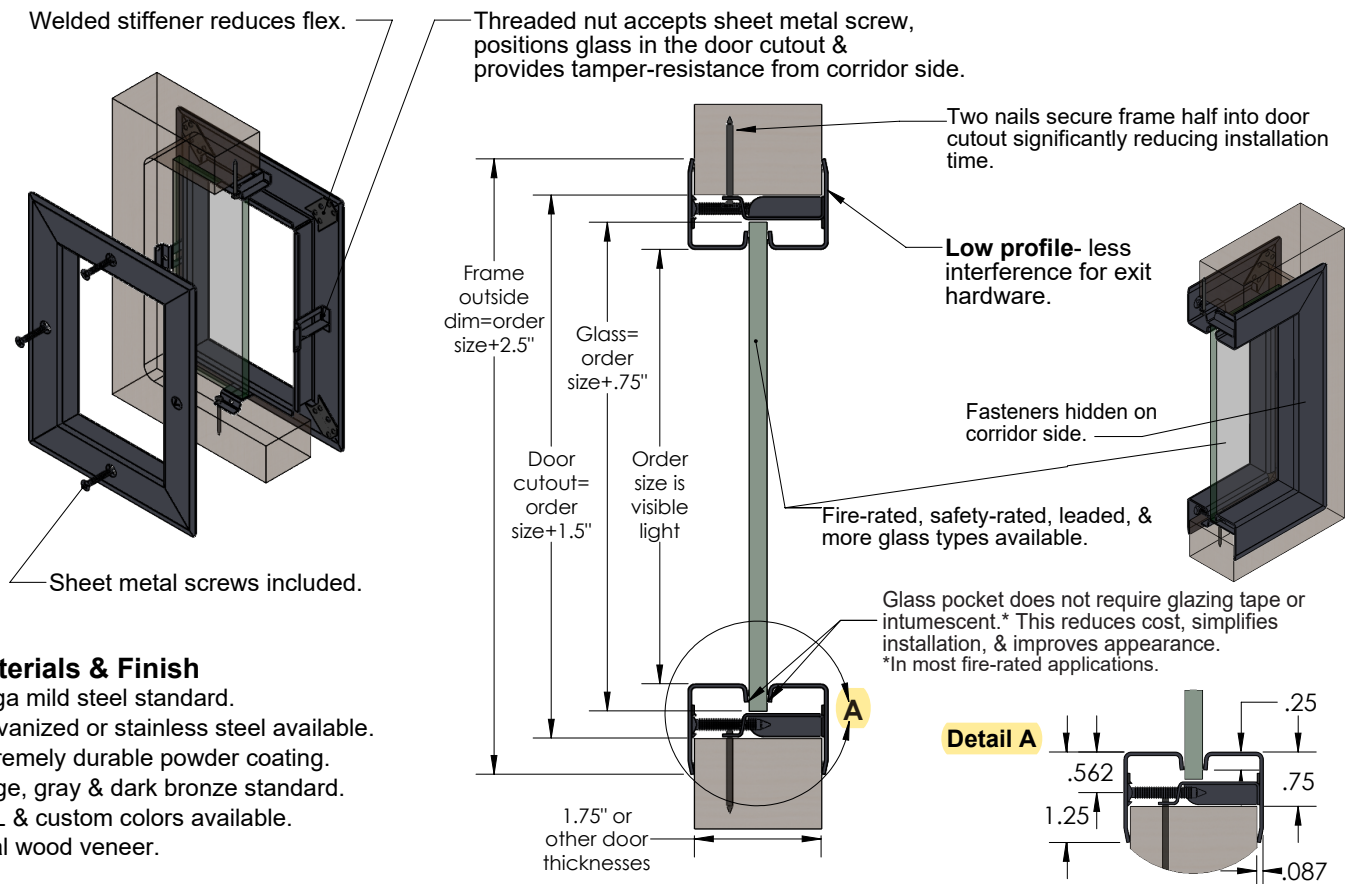

Materials & Finish

18 ga mild steel standard.

Galvanized or stainless steel available.

Extremely durable powder coating.

Beige, gray & dark bronze standard.

RAL & custom colors available.

Real wood veneer.