

BAILLARGEON® SERIES

Particle Core (Standard Duty)

8100-MO / 8120-MO (5 ply)

FORTE
OPENING SOLUTIONS

FOR MODERATE USE

- A STILES:** 1 3/16" (30 mm) clear, finger-jointed, low-density wood.
- B TOP AND BOTTOM RAILS:** 1 3/16" (30 mm) low-density wood or SCL, (LVL) or laminated strand lumber (LSL), manufacturer's choice.
- C CORE:** Solid particleboard. Density of 28-32 lbs per cubic foot.
- D FACES:** Wood veneer (choice of face veneers; 2 ply plywood), fiber board or plastic laminate glued to composite crossband.

LOCK BLOCK: Integrated.

GLUE: Type 1 PVA Cross-link.

INTERIOR use

WARRANTY: 3 years.

NOTE: Dimensions are nominal before trimming.

OPTIONS


- 20 min fire rating, specify 8120-MO.
- STC sound rating not available.

LEED CONTRIBUTION OPTIONS


- EPD
- Recycled content
- LEED V4.1
- FSC
- ULEF

PERFORMANCE MEASUREMENT

- ANSI/WDMA 1.S.1A
- ANSI A208-1 (particle board LD-1/LD2)
- ASTM-D1037 and D198-98 (LSL)
- ASTM-D5456-93 (LVL)
- AWS
- Intertek WH-ETL
- NFPA 80

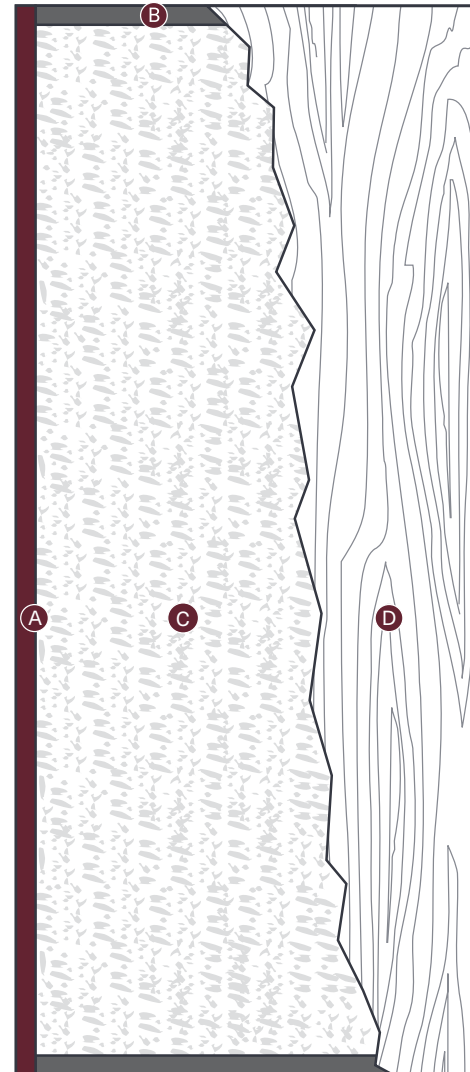

A STILES MO

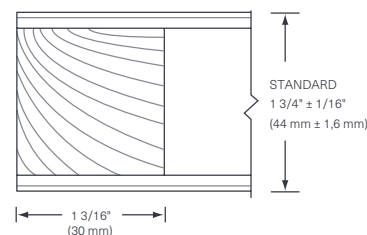

B RAILS

