BAILLARGEON® SERIES

PARTICLE CORE (Heavy Duty)

8600-MO/ME/VE / 8620-MO/ME/VE (5 ply)

FOR INTENSIVE USE

A **STILES: 1/8" (3 mm)** thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, (LVL) or laminated strand lumber (LSL), might include a **7/8" (22 mm)** piece of hardwood, for a total width of **1 3/16" (30 mm)**

MO: Manufacturer's choice

ME: Matched with faces

VE: Covered with **1/32'' (0.8 mm)** wood veneer, matched with faces

B **TOP AND BOTTOM RAILS: 1 3/16" (30 mm)** in wood or SCL, manufacturer's choice (LVL) or (LSL).

C **CORE:** Solid particleboard. Density of 28-32 lbs per cubic foot.

D **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), fiberboard or plastic laminate glued to composite crossband.

LOCK BLOCK: Integrated

GLUE: Type 1 PVA Cross -link

CONSTRUCTION: Interior only

WARRANTY: Lifetime

NOTE:

- Dimensions are nominal before trimming.

FIRE–RATED OPTIONS:

- 20 min fire rating, specify 8620 MO/ME/VE

SOUND RATED OPTIONS:


- Available 30dB depending on configuration of soundproofing hardware.
- For optimization, see our soundproof construction.

LEED CONTRIBUTION OPTIONS:


- EPD
- Recycled content
- LEED V4.1
- FSC
- ULEF

PERFORMANCE MEASUREMENT:


- ANSI/WDMA 1.S.1A
- ANSI A208-1 (particule LD-1/LD2)
- ASTM-D1037 et D198-98 (LSL)
- ASTM-D5456-93 (LVL)
- AWS
- Intertek WH-ETL
- NFPA 80

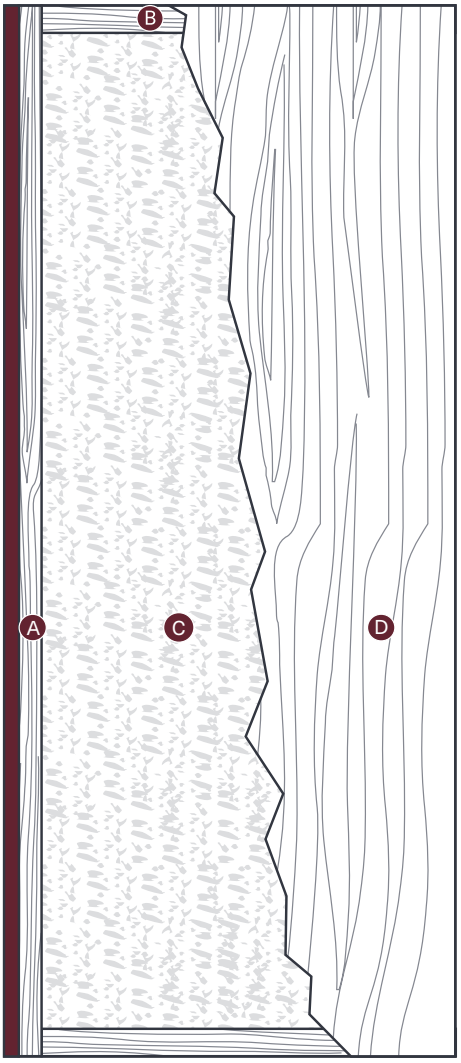


A STILES MO/ME

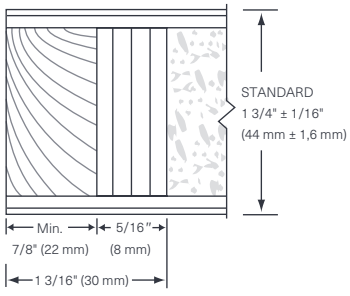

A STILES VE

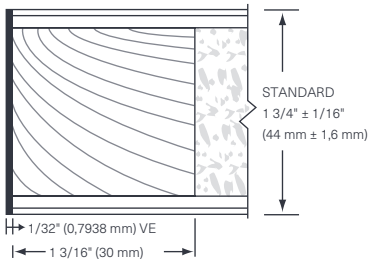

B RAILS



forteopenings.com
IBP Solutions Canada Inc. dba Forte Opening Solutions