BAILLARGEON® SERIES

Particle Core (Extra Heavy-Duty)

8300-ME / 8320-ME (5-ply)

FORTE
OPENING SOLUTIONS

FOR INTENSIVE USE

- A **STILES: 3-5/16" (85 mm)** laminated strand lumber (LSL), including a **7/8" (22 mm)** piece of hardwood, matched with faces, for a total width of **4-3/16" (106 mm)**. These wood components are bonded with type 1.
- B **TOP AND BOTTOM RAILS**: **3-5/16" (84 mm)** laminated strand lumber (LSL). These wood components are bonded with type 1 water-resistant adhesive.
- C **CORE:** Solid particleboard. Density of 28-32 lbs per cubic foot.
- D **FACES:** Wood veneer (choice of face veneers; 2-ply plywood), fiberboard or plastic laminate glued to composite crossband.


LOCK BLOCK: Integrated

GLUE: Type 1 PVA Cross-link

CONSTRUCTION: Interior only

WARRANTY: Lifetime

NOTE: Dimensions are nominal before trimming

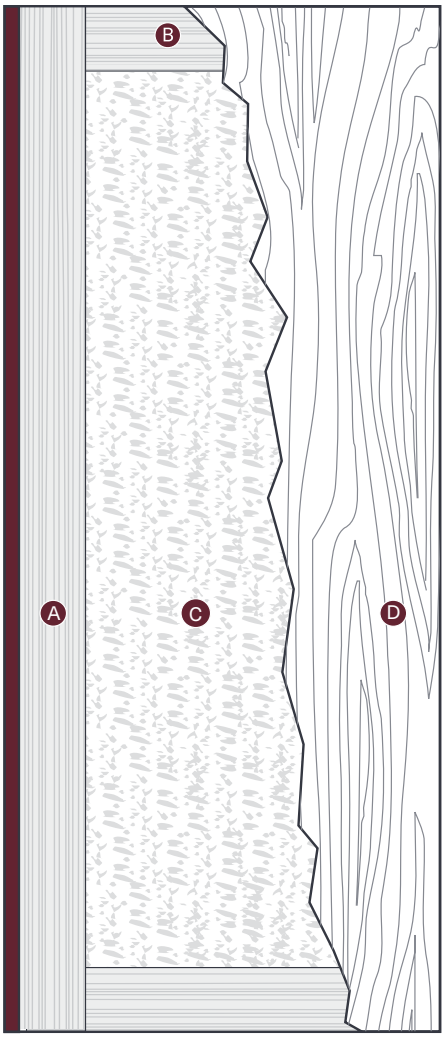

OPTIONS:

- 20-min. fire rating, specify 8320-ME
- STC sound rating not available


LEED CONTRIBUTION OPTIONS:

- EPD
- Recycled content
- LEED V4.1
- FSC
- ULEF


PERFORMANCE MEASUREMENT:

- ANSI/WDMA 1.S.1A
- ANSI A208-1 (particle board LD-1/LD2)
- ASTM-D1037 and D198-98 (LSL)
- ASTM-D5456-93 (LVL)
- AWS
- Intertek WH-ETL
- NFPA 80

A STILES ME

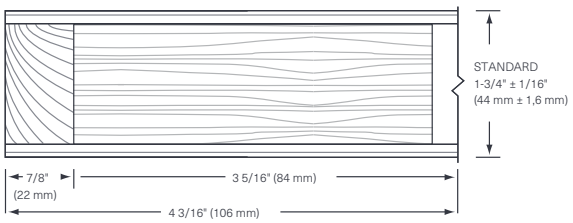

B RAILS



forteopenings.com

©2025 Forte Opening Solutions