

FOR INTENSIVE USE

- A STILES:** 3-5/16" (85 mm) laminated strand lumber (LSL), including a 7/8" (22 mm) piece of hardwood, matched with faces, for a total width of 4-3/16" (107 mm). These wood components are bonded with type 1.
- B TOP AND BOTTOM RAILS:** 3-5/16" (85 mm) laminated strand lumber (LSL). These wood components are bonded with type 1 water-resistant adhesive.
- C CORE:** Solid particleboard. Density of 28-32 lbs per cubic foot.
- D FACES:** Wood veneer (choice of face veneers; 2-ply plywood), fiberboard or plastic laminate glued to composite crossband.
- LOCK BLOCK:** Integrated
- GLUE:** Type 1 PVA Cross-link
- CONSTRUCTION:** Interior only
- WARRANTY:** Lifetime
- NOTE:** Dimensions are nominal before trimming.

OPTIONS:


- 20-min. fire rating, specify 8320-ME
- STC sound rating not available

LEED CONTRIBUTION OPTIONS:


- EPD
- Recycled content
- LEED V4.1
- FSC
- ULEF

PERFORMANCE MEASUREMENT:

- ANSI/WDMA 1.S.1A
- ANSI A208-1 (particle board LD-1/LD2)
- ASTM-D1037 and D198-98 (LSL)
- ASTM-D5456-93 (LVL)
- AWS
- Intertek WH-ETL
- NFPA 80

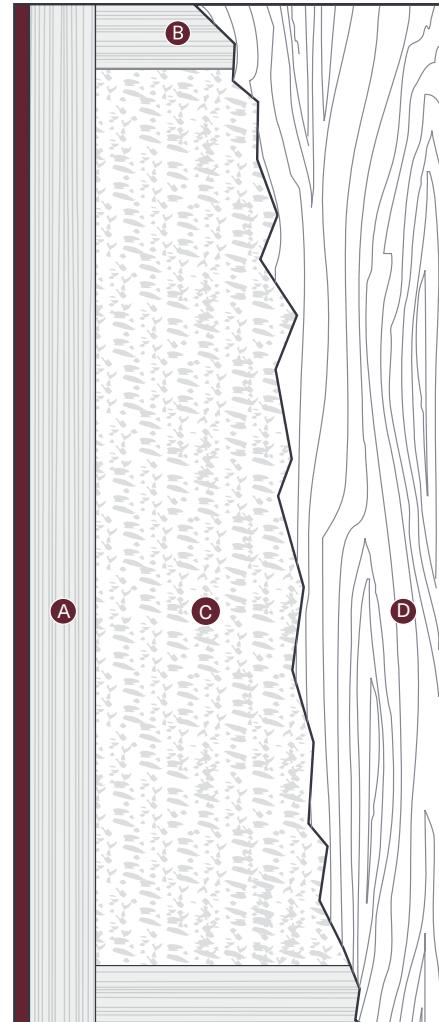

A STILES ME

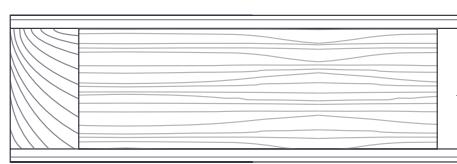

B RAILS

