

BAILLARGEON® SERIES
Hollow (Extra Heavy-Duty)
9300-ME (5-ply)

FORTE
OPENING SOLUTIONS

FOR INTENSIVE USE

A STILES: 3-5/16" (85 mm) laminated strand lumber (LSL), including a 7/8" (22 mm) piece of hardwood, matched with faces, for a total width of 4-3/16" (107 mm). These wood components are bonded with type 1 water-resistant adhesive.

B TOP AND BOTTOM RAILS: 3-5/16" (85 mm) laminated strand lumber (LSL). These wood components are bonded with type 1 water-resistant adhesive.

C CORE: 4-3/4" (120 mm) honeycomb. (100% recycled).

D FACES: Wood veneer (choice of face veneers; 2-ply plywood), fiber board panel or plastic laminate glued to composite crossband.

LOCK BLOCK (1): For lock, card reader, panic bar, material at manufacturer's choice.

GLUE: Type 1 PVA Cross-link.

CONSTRUCTION: Interior use

SEAL COMPONENT KIT no. 10

WARRANTY: 3 years.

NOTE:

- Dimensions are nominal before trimming.

OPTIONS:


- STC sound rating not available.

LEED CONTRIBUTION OPTIONS:


- EPD
- LEED V4
- Recycled content
- FSC
- ULEF

PERFORMANCE MEASUREMENT:

- ANSI/WDMA 1.S.1A
- ASTM E 90-02, 413-87, E 1332-90, E 2235-03
- AWS
- AWMAC
- Intertek WH-ETL
- NFPA 80

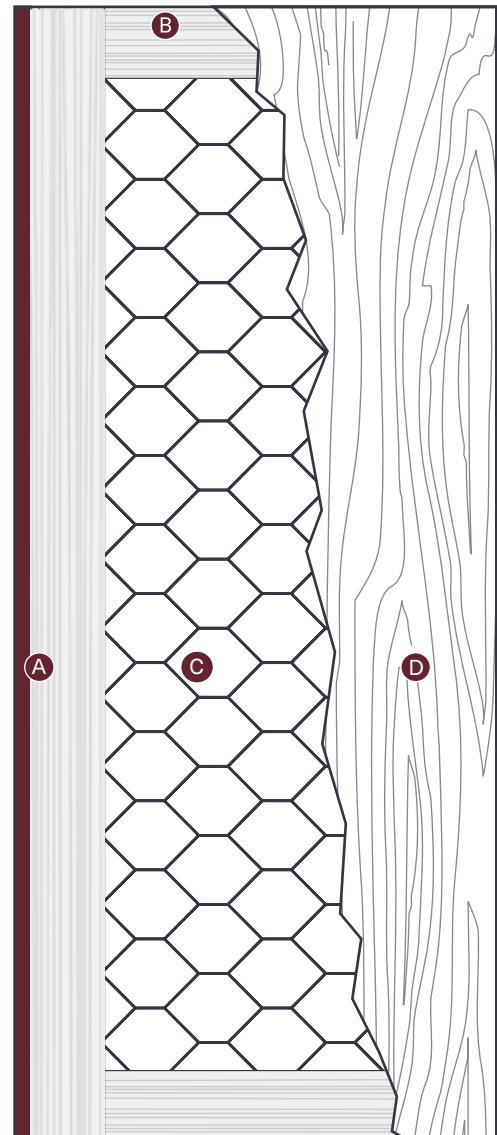

A STILES ME

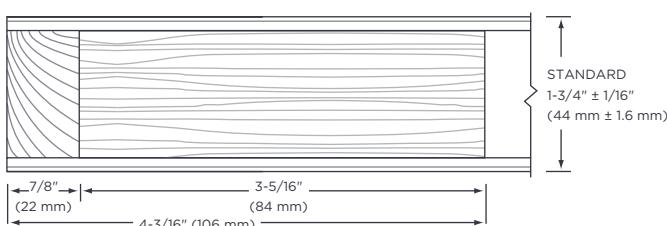

B RAILS

