

## SOUND RETARDANT DOORS 40 DB FOR INTENSIVE USE

Our doors are certified and tested by Architectural Testing up to 48" X 96". Oversize constructions available without STC or fire label.

**A STILES:** 1 3/16" (30 mm) structural composite lumber with 7/8" (22 mm) hardwood matched with faces.

**B TOP AND BOTTOM RAILS:** 3 5/16" (84 mm) at top and bottom.

**C CORE:** Sound dampening core

**D FACES:** Wood veneer (choice of face veneers; 2 ply plywood), fiber board panel or plastic laminate glued to composite crossband.

**GLUE:** Type 1 PVA Cross-link.

**INTERIOR use**

**SR41: SEAL COMPONENT KIT no. 10**

**WARRANTY:** 3 years.

**NOTE**

- Dimensions are nominal before trimming.

**OPTIONS**

- 20 min fire rating: specify SR4020
- Stiles and rails may differ than non rated.

**WARNING**

- Use of gaskets other than those tested may affect STC rating. Walls components, frame installation and joints can also impact STC ratings.

**IMPORTANT**

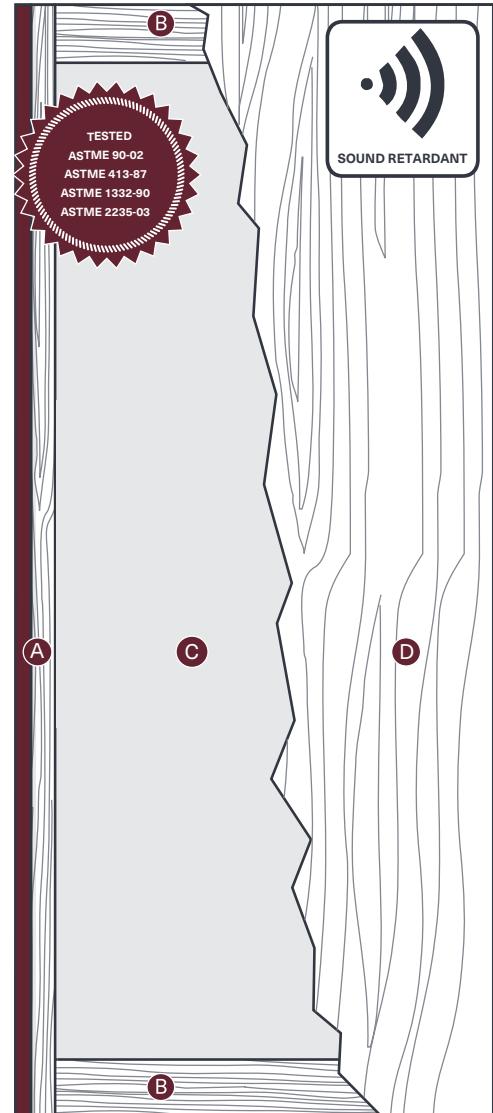
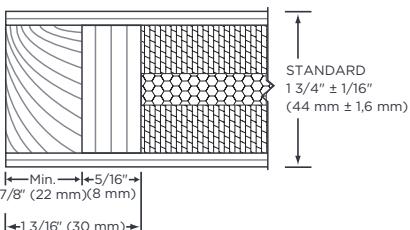
- Gaskets and automatic door bottom mortise included.
- Limited dimensions.

**LEED CONTRIBUTION OPTIONS**

- EPD
- LEED V4.1
- Recycled content
- FSC
- ULEF

**PERFORMANCE MEASUREMENT**

- ANSI/WDMA 1.S.1A
- ASTM E 90-02, 413-87, E 1332-90, E 2235-03
- AWS
- AWMAC
- Intertek WH-ETL
- NFPA 80

**A STILES ME****B BOTTOM RAIL**