

SOUND RETARDANT DOORS 35 DB FOR INTENSIVE USE

Our doors are certified and tested by
Architectural Testing to 48" X 120".

A STILES: 1 3/16" (30 mm) structural
composite lumber with 7/8" (22 mm)
hardwood matched with faces.

B TOP AND BOTTOM RAILS: 1 3/16" (30 mm)
at top and 3 5/16" (84 mm) at bottom.

C CORE: Sound dampening core

D FACES: Wood veneer (choice of
face veneers; 2 ply plywood), fiber
board panel or plastic laminate
glued to composite crossband.

GLUE: Type 1 PVA Cross-link.

INTERIOR use

SEAL COMPONENT KIT no. 12

WARRANTY: 3 years.

NOTE

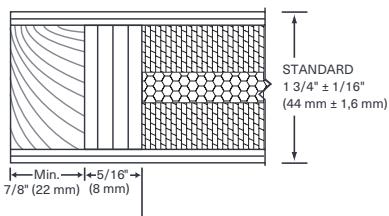
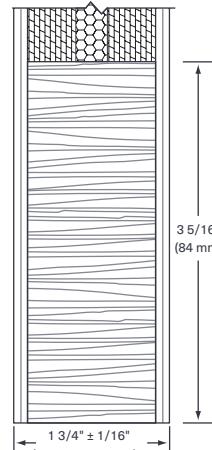
- Dimensions are nominal before trimming.

OPTIONS

- 20 min fire rating: specify SR3520.
- Stiles and rails may different than non rated.

WARNING

- Use of gaskets other than those
tested may affect STC rating. Walls
components, frame installation and
joints can also impact STC ratings.

IMPORTANT**A STILES ME****B BOTTOM RAIL****B TOP RAIL**