


For Warranty or Label
A - Minimum Stile or Rail Dimension
B - Minimum Lite to Lock Dimension
C - Minimum Lite to Lite Dimension
D - Minimum Lock to Lock Dimension
E - Bottom Rail

Door Type	Fire Rating	A		B		C		D		E	
		in	mm	in	mm	in	mm	in	mm	in	mm
Particleboard	0	5.000"	[127.00]	3.250"	[82.55]	3.250"	[82.55]	3.250"	[82.55]	10.00"	[254.00]
SCL	0	5.000"	[127.00]	1.063"	[26.99]	3.250"	[82.55]	3.250"	[82.55]	5.000"	[127.00]
EHD PC	0	5.000"	[127.00]	3.250"	[82.55]	3.250"	[82.55]	3.250"	[82.55]	5.000"	[127.00]
Particleboard	20	5.000"	[127.00]	3.250"	[82.55]	3.250"	[82.55]	5.000"	[127.00]	10.00"	[254.00]
SCL	20 w/o Hose	5.000"	[127.00]	1.063"	[27.00]	3.250"	[82.55]	5.000"	[127.00]	5.000"	[127.00]
SCL	20	5.000"	[127.00]	1.250"	[31.75]	3.250"	[82.55]	5.000"	[127.00]	5.000"	[127.00]
EHD PC	20	5.000"	[127.00]	3.250"	[82.55]	3.250"	[82.55]	5.000"	[127.00]	5.000"	[127.00]
Mineral or Fire Core	45-90	5.000"	[127.00]	3.250"	[82.55]	3.250"	[82.55]	5.000"	[127.00]	5.000"	[127.00]

NOTE:

1. DIMENSIONS IN BRACKETS [XX] INDICATE METRIC MM DIMENSIONS
2. DIMENSIONS SHOWN AFTER TRIM
3. DIMENSIONS ARE SHOWN FOR ALL DOOR THICKNESSES
4. MAXIMUM 48.000 [1219.20] ABOVE SILL FOR CYLINDRICAL DEADBOLTS FOR ITS LISTINGS: 20MIN FIRE RATINGS
5. BOTTOM RAIL ON PARTICLEBOARD DOORS WITH ONE LITE CUT OUT SHALL NOT BE LESS THAN 10" [254]
6. WOOD OR METAL LOUVERS ON PARTICLEBOARD DOORS WILL CONFIGURE WITH MINIMUM 5" BOTTOM RAILS AND BE COVERED UNDER STANDARD WARRANTY CONDITIONS

Lite & Lock Conflict – Cylindrical Lock Machining

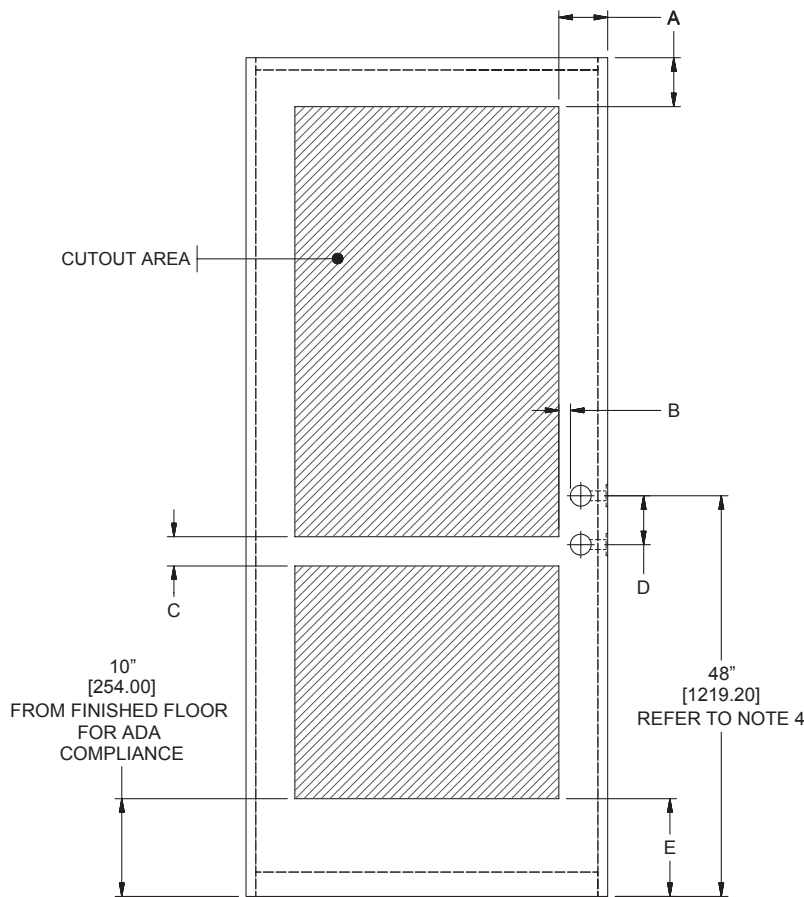

For Warranty or Label
A - Minimum Stile or Rail Dimension
B - Minimum Lite to Lock Dimension
C - Minimum Lite to Lite Dimension
D - Minimum Lock to Lock Dimension
E - Bottom Rail

Door Type	Fire Rating	A		B		C		D		E	
Particleboard	0	5.000"	[127.00]	3.250"	[82.55]	3.250"	[82.55]	5.000"	[127.00]	10.00"	[254.00]
SCL	0	5.000"	[127.00]	1.063"	[26.99]	3.250"	[82.55]	5.000"	[127.00]	5.000"	[127.00]
EHD PC	0	5.000"	[127.00]	3.250"	[82.55]	3.250"	[82.55]	5.000"	[127.00]	5.000"	[127.00]
Particleboard	20	5.000"	[127.00]	3.250"	[82.55]	3.250"	[82.55]	5.000"	[127.00]	10.00"	[254.00]
SCL	20 w/o Hose	5.000"	[127.00]	1.063"	[27.00]	3.250"	[82.55]	5.000"	[127.00]	5.000"	[127.00]
SCL	20	5.000"	[127.00]	1.250"	[31.75]	3.250"	[82.55]	5.000"	[127.00]	5.000"	[127.00]
EHD PC	20	5.000"	[127.00]	3.250"	[82.55]	3.250"	[82.55]	5.000"	[127.00]	5.000"	[127.00]
Mineral or Fire Core	45-90	5.000"	[127.00]	3.250"	[82.55]	3.250"	[82.55]	5.000"	[127.00]	5.000"	[127.00]

NOTE:

1. DIMENSIONS IN BRACKETS [XX] INDICATE METRIC MM DIMENSIONS
2. DIMENSIONS SHOWN AFTER TRIM
3. DIMENSIONS ARE SHOWN FOR ALL DOOR THICKNESSES
4. MAXIMUM 48.000 [1219.20] ABOVE SILL FOR CYLINDRICAL DEADBOLTS FOR ITS LISTINGS: 20MIN FIRE RATINGS
5. BOTTOM RAIL ON PARTICLEBOARD DOORS WITH ONE LITE CUT OUT SHALL NOT BE LESS THAN 10" [254]
6. WOOD OR METAL LOUVERS ON PARTICLEBOARD DOORS WILL CONFIGURE WITH MINIMUM 5" BOTTOM RAILS AND BE COVERED UNDER STANDARD WARRANTY CONDITIONS