

**1 PLY LVL (LAMINATED VENEER LUMBER) CORE,  
 ANTI-WARPING, FOR INTENSIVE USE**

**A STILES:** 7/8" (22 mm) wide hardwood, matched with faces. Bonded to core.

**B TOP AND BOTTOM RAILS:** 7/8" (22 mm) in hardwood or SCL, (LVL) or laminated strand lumber (LSL), manufacturer's choice. Bonded to core.

**C CORE:** 1/8" (3 mm) thick veneer, longitudinally laminated by hot pressing with type 1 structural glue.

**D FACES:** Wood veneer (choice of face veneers; 2 ply plywood), fiber board panel or plastic laminate glued to composite crossband.

**LOCK BLOCK:** Integrated.

**GLUE:** Type 1 PVA Cross-link.

**INTERIOR use**

**WARRANTY:** Lifetime

**NOTE**

• Dimensions are nominal before trimming.

**OPTIONS**


- 20 min fire rating, specify 7020-ME.
- 3 5/16" (85 mm) LVL or LSL rails (according to hardware).
- STC sound rating not available.

**LEED CONTRIBUTION OPTIONS**


- EPD
- Recycled content
- LEED V4.1
- FSC
- ULEF

**PERFORMANCE MEASUREMENT**

- ANSI/WDMA 1.S.1A
- ASTM-D1037 and 198-98 (LSL)
- ASTM-D5456-93 (LVL)
- AWS
- Intertek WH-ETL
- NFPA 80

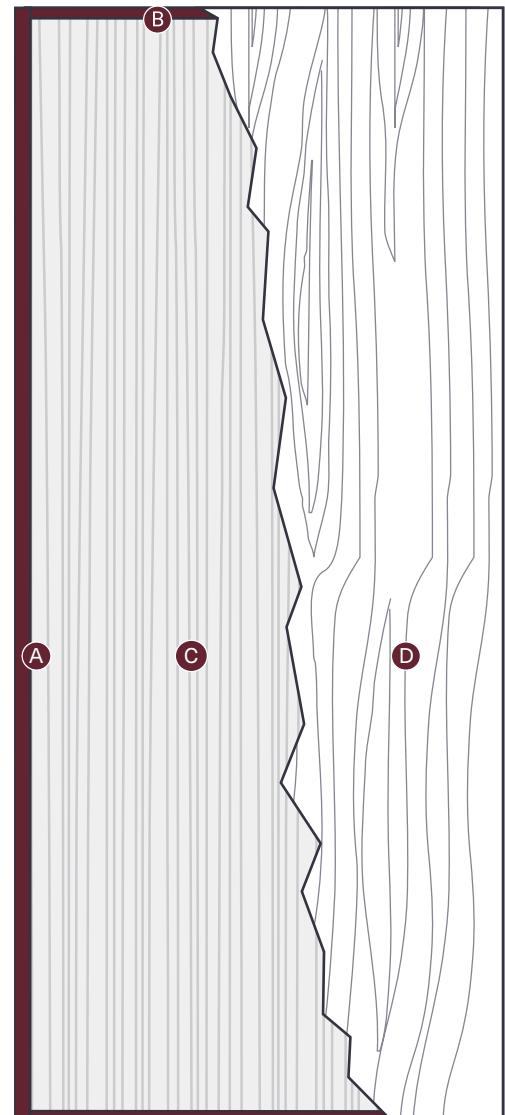

**A STILES ME**

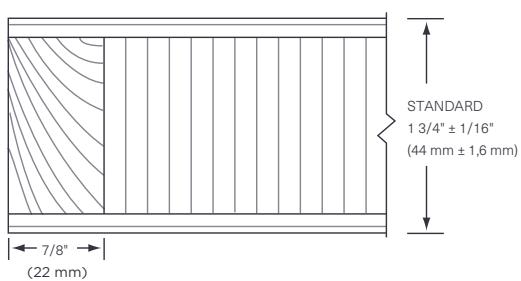

**B RAILS**

