

MANUFACTURERS TABULATED DATA SHEET

t060012


OCTAGON BOX 4'D X 8'W x 8'L

MODEL NO

MANHOLE BOX DEPTH	4	FT
LENGTH	8	FT
THICKNESS	2	IN
SHIELD WEIGHT	0	LBS
MAXIMUM DEFLECTION	0.13	IN

**ALLOWABLE LOADING
AND DEPTH (D) (FT)**

RATING (PSF)	A-25	B-45	C-60	C-80
2304	30	30	30	29

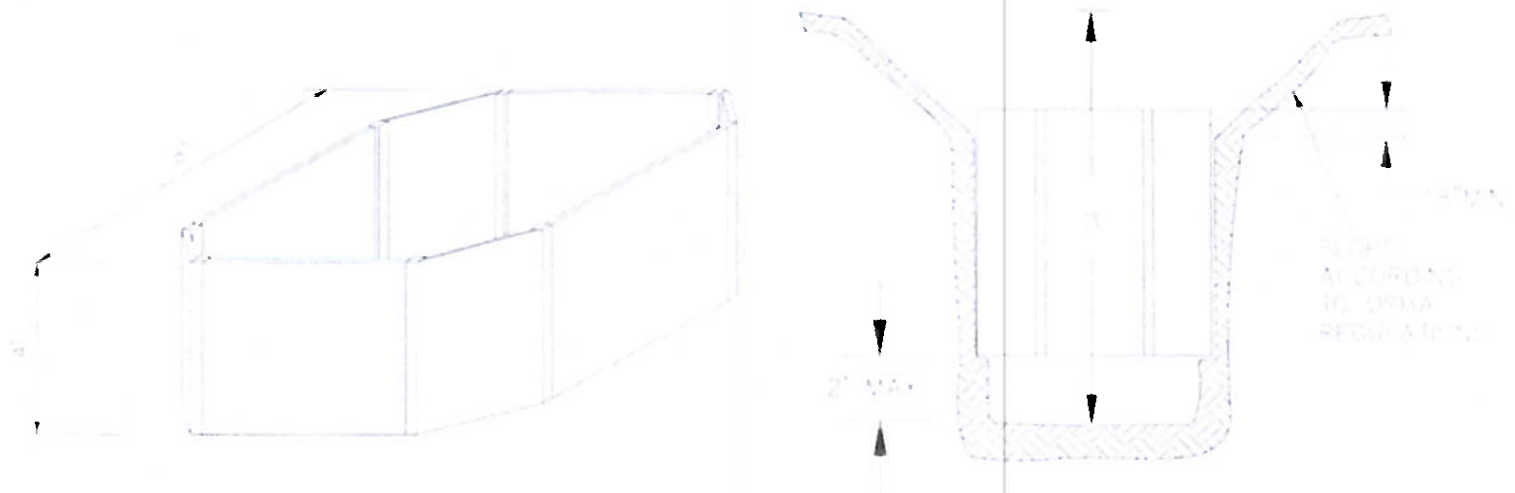

Notes:

- 1) All excavations shall be in accordance with Federal OSHA CFR 29, Part 1926, Subpart P, July 1997, and State OSHA Safety orders.
- 2) Soil shall be classified in accordance with OSHA Appendix A or by a registered civil engineer prior to installing this equipment.
- 3) Shoring box may be held 2 ft above the bottom of the excavation.
- 4) Shoring box loading shall be determined by a competent person or engineer. The above depth ratings allow a 72 PSF surcharge load. Equipment and spoil piles spaced minimum 2 FT from the edge of the excavation will exert a 72 PSF surcharge load.
- 5) Shoring box shall be fully assembled & set in place prior to workers entering excavation.


**WRIGHT
MANUFACTURING, LLC**

CUSTOM METAL PRODUCTS
1674 SE JOHNSON CREEK BLVD
PORTLAND, OR 97206
PH: (503) 774-9889

MANUFACTURER

WRIGHT MFG, LLC

MODEL/SERIAL NUMBER



OCTAGON BOX 4'D X 8'W x 8'L

**J.M. TURNER ENGINEERING, INC.
CONSULTING ENGINEERS**



1105 N. DUTTON AVE., SANTA ROSA, CA
(707) 528-4501 FAX (707) 528-4505

DATE
05/17/06

REVISED JOB NO. SHEET
9534-1 1 OF