

**Step 1** Check parts / hardware list and confirm all parts and necessary hardware are included before installation. It's a good idea to spray all OE attaching hardware with penetrating oil before beginning removal of OE bolts. This will ease removal as well as help assure that none of the bolts' / nuts' threads are damaged during removal.

**Step 2**

- If your vehicle is equipped with the factory steps or side bars, they will need to be removed prior to installation of the Body Armor RockCrawler Side Guards.
- Start with the Passenger side. Refer to Figure 1(below) for proper placement of each bracket.
- Identify the 2 factory holes located in the undercarriage of the vehicle. If necessary you may need to install a "T" bolt in to the square opening making sure you center it in the hole as shown in Photo group1. (next page)
- Slide the "T" bolt up into the body with the bolt facing down through the hole. Use factory threaded nut in the undercarriage if equipped
- Locate the 2 sets of holes (4 total) in the factory pinch weld. Start with the front set. Attach a bracket (#2) to the pinch weld using a 8mm bolt, nut and washer for the front hole and 6m bolt, nut and washer for the rear hole.  
Repeat with 8MM and 6MM bolts on rear bracket.
- Loosely fit all brackets with hardware. Once all brackets are attached tighten all hardware prior to installing side bars.


**Step 3** Identify the passenger and driveside bar by lining them up so that they match the brackets that are mounted on the vehicle.

**Step 4** With the aid of a helper, hold up the side guard to the pinchweld and attach them to the mounting brackets using the

- 10mm bolts, nuts and washers as shown in Photo #3. (next page).

Repeat steps on passenger side (as in diagram below).  
See Photos on the next page for reference.

\*\*\*We recommend you check the torque of all bolts after about two weeks, and after every off-road / trail run to assure tightness.

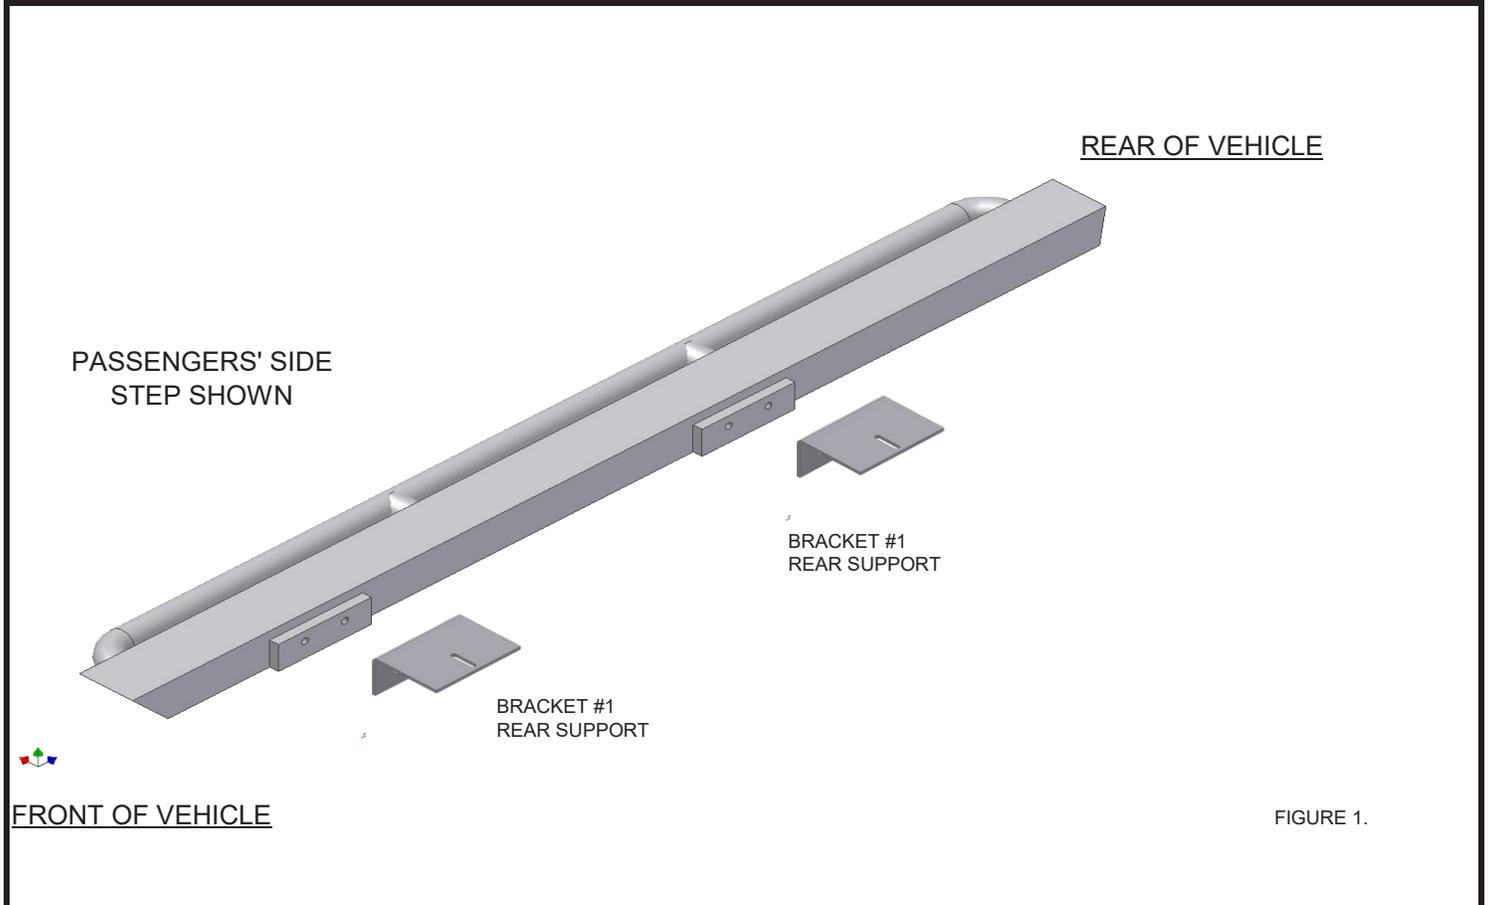

**WARRANTY POLICY & PROCEDURE**

Contact your Body Armor 4x4 Distributor or Body Armor 4x4 directly regarding any issue prior to removing product from vehicle. If it appears said product is warrantable, you will be given a Return Authorization Number (RA #) and asked to return said product freight pre- paid. The RA # must appear on the outside of the carton/box of any returned product. Unauthorized returns will be refused. RA # must be given by Body Armor 4x4 in advance of return.

**BODY ARMOR LIMITED LIFETIME WARRANTY**

Body Armor 4x4 (BA) warrants to the original purchaser that these products will be free from defects in material and workmanship prior to shipping and/or installation for the life of the product. This non-transferable limited lifetime warranty does not cover damage or impairment in any part due to misuse, improper installation, accident or contact with on-road or off-road hazards, product modification, improper or inadequate cleaning and/or maintenance. All other warranties and representations express or implied are hereby disclaimed, including fitness for merchantability and buyer's intended use or purpose.

BA products are built and sold for highway and off-road use. The original purchaser assumes all risks as to the selection, suitability and performance of all goods and products purchased.

BA's sole and exclusive obligation under this warranty shall be to repair or replace the item(s) and their discretion and BA will not issue any credit or refund to the consumer. Proof of purchase is required on all warranty claims. BA may require pictures to diagnose the warranty claim and may require the product(s) be returned if determined by BA to be necessary. If a return is required then a RGA number will be issued by BA. Any item arriving to BA without a valid

RGA number will be refused and sent back. Upon evaluating the RGA and no valid warranty claim is made, the RGA will be returned to the consumer at their expense or disposed by BA after 60 days. BA will not be responsible for incidental charges such as removal, installation, shipping costs or lost during transit. Any items that are ordered in error, refused or cancelled are not considered a valid warranty claim and cannot be returned to BA.

**WARRANTY PROCESS**

Contact an authorized BA dealer to initiate warranty process. Authorized dealers must contact BA to assist in evaluating the warranty claims. Valid warranties will have a RGA issued. Once issued the dealer will request the product be returned to BA facilities. Products purchased through an authorized BA dealer will be refunded and/or credited by that BA dealer.

Warranty contact: [orders@bodyarmor4x4.com](mailto:orders@bodyarmor4x4.com)

Return address: Body Armor 4x4, 1050 N. Vineyard Ave. Ontario CA, 91764, P: 951-808-0750

**FINISH WARRANTY**

The finish is warranted to be free of defects for a period of 3 years from date of purchase. Product(s) that have been abused, altered, incorrectly installed or used in competition are void of said warranty. Surface rust, pitting or discoloration is a direct result of improper maintenance is not covered by this warranty. It is the responsibility of the owner to preserve and maintain the finish of their product(s). In areas where high concentrations of road salts and other corrosive agents are used, rust or damage to the finish may occur if BA product(s) are not properly maintained. Lack of proper maintenance in these areas may void the finish warranty. See below for routine maintenance tips and recommendations.

**PRODUCT CARE AND MAINTENANCE**

Textured coat finished should be cleaned ONLY with a mild soap on a damp sponge.

BA recommends wiping down the product with a light coat of lubricate (i.e. WD40) periodically to maintain its luster.

DO NOT apply polish or wax that requires buffing for removal as this may damage the finish.

DO NOT coat the product with any type of shine such as Tire Shine or glossy aerosol or gel. This can cause discoloration, staining or bubbling.