


2016-2023 TOYOTA TACOMA DOUBLE CAB E-POWER BOARD STEPS PART #TC-4600

Mechanical PARTS LIST:

Qty	Item Description	Qty	Item Description
2	Power Step Boards	16	8mm Flange Nylon Lock Nuts
1	Driver/Left Front Motor Linkage Assembly	14	8mm Lock Washers
1	Passenger/Right Front Motor Linkage Assembly	10	8mm Hex Nuts
2	Rear Linkage Assembly	6	8x24x2mm Large Flat Washers
2	Front Steel Mounting Bracket	8	8x16x1.6mm Flat Washers
1	DS Rear Steel Mounting Bracket	8	8-1.25x25mm Bolt Plates (28*13-10)
1	PS Rear Steel Mounting Bracket	4	8-1.25x30mm Hex Bolts
16	6-1.00mm x 20mm Carriage Bolts	2	8-1.25x30mm Bolt Plates (70*30)
16	6x16x1.6mm Flat Washers	1	8mm Fish Wire
16	6mm Hex Nylon Lock Nuts	10	Plastic Retainer (ø0.7*40*40)
16	8-1.25x30mm Carriage Bolts		


Electronic Materials Package PARTS LIST:

Qty	Item Description	Qty	Item Description
1	Main Harness	1	ECU
2	Wire Taps	4	LED lights
1	LED Y-Harness (280mm)	1	LED Y-Harness (1200mm)
5	Double Side Adhesive Tapes	15	Zip Ties

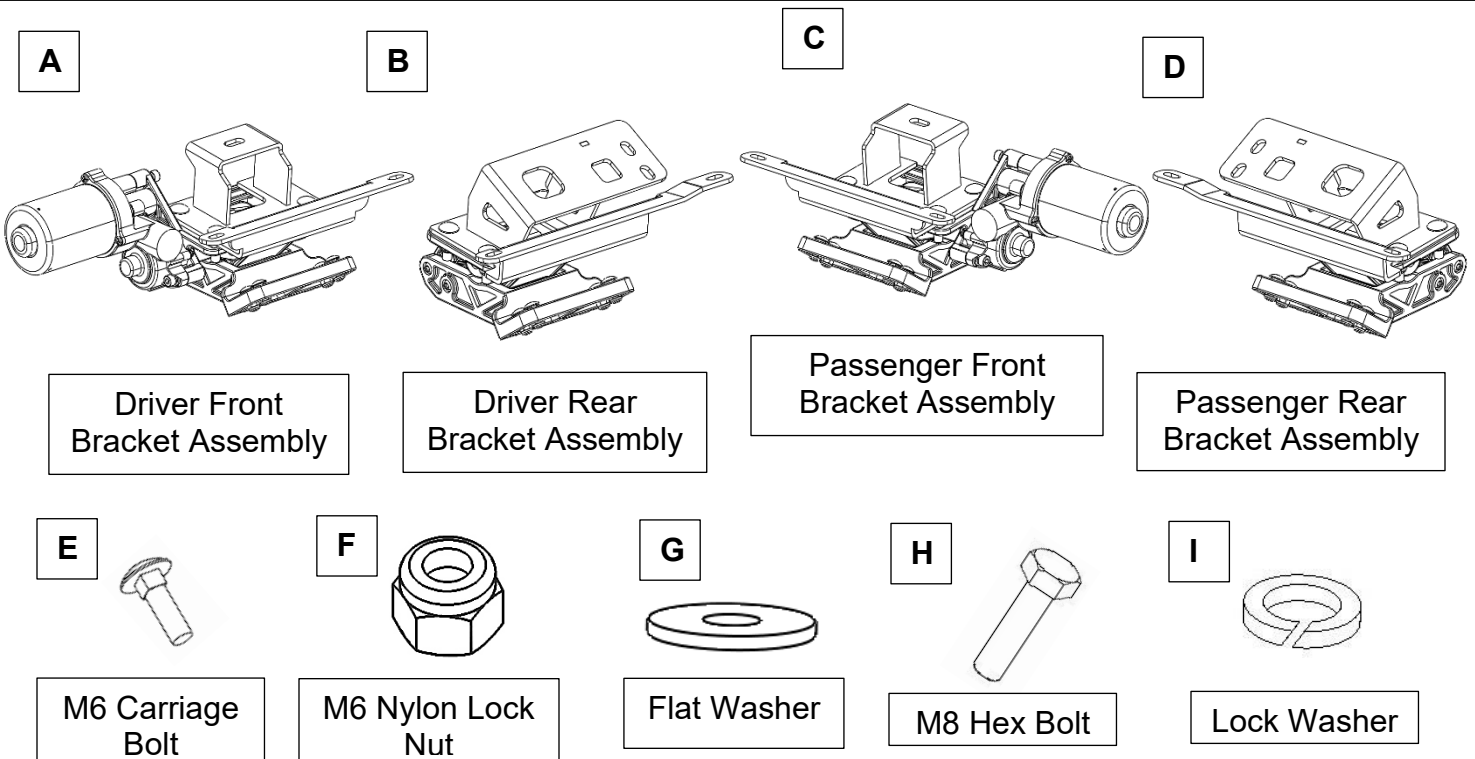


INSTALLATION INSTRUCTIONS

O




M8 Bolt Plate (Large)

P




M8 Hex Nut

Q




Plastic Insulator

R




M8 Bolt Plate (Small)

S




M8 Carriage Bolt

T




M8 Flanged Nylon Lock Nut

J

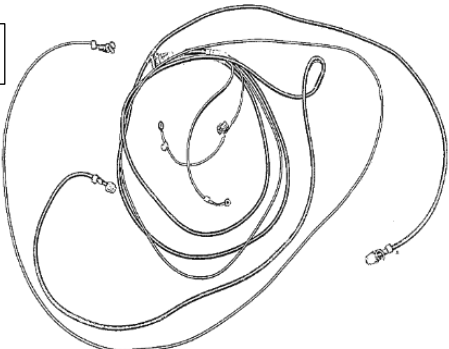


Main Harness

K1

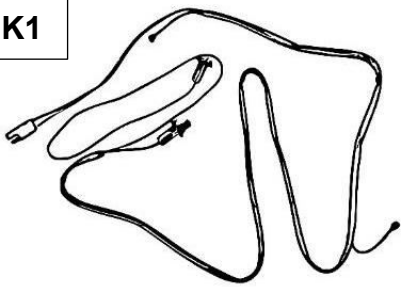


LED Y-Harness (1200mm)

K2




LED Y-Harness (280mm)

L




Wire Taps

M




ECU

N



LED Lights


U

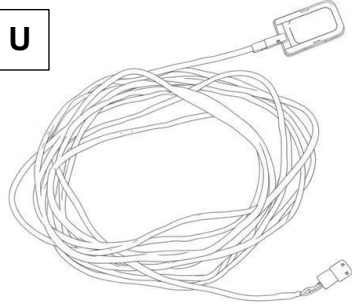

Toggle Switch

This is an optional accessory, not included in standard kit.


TOOLS REQUIRED

 Ratchet	 Socket 8mm 10mm 13mm	 Extensions	 Wrench	 Electrical Tape
---	---	--	--	---



1

Take the mounting brackets and attach them to the linkage arms. First, insert the M8 Carriage Bolts into the square slots on the brackets so that the threads are pointing downwards.


Insert M8 Carriage Bolts downwards.

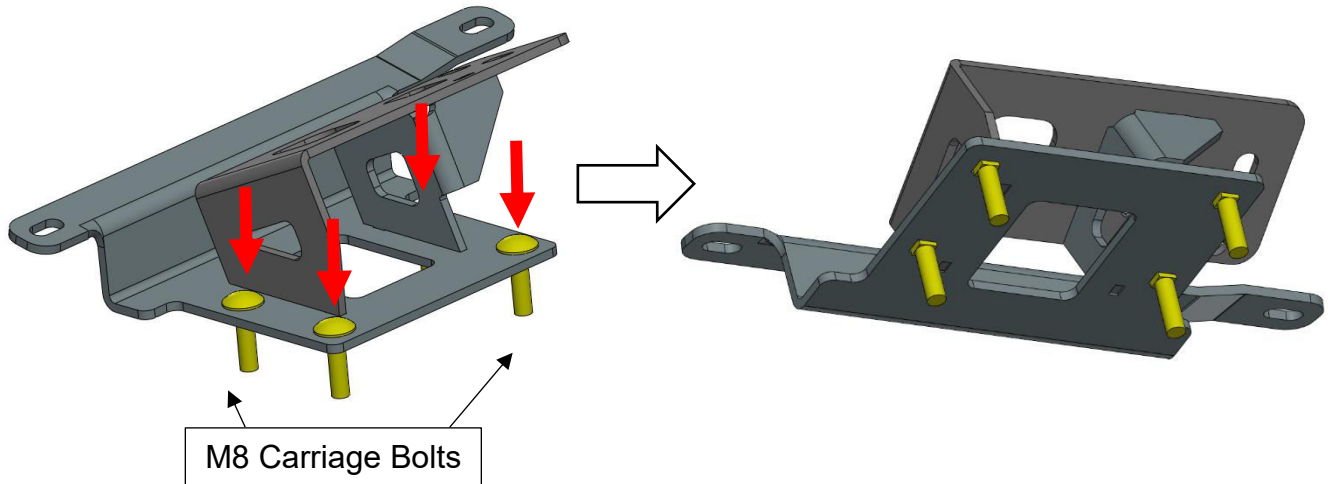

Next, use the M8 Flanged Nylon Lock Nuts to fasten the aluminum linkage arms to the brackets. There are 4 fastening points on each bracket.

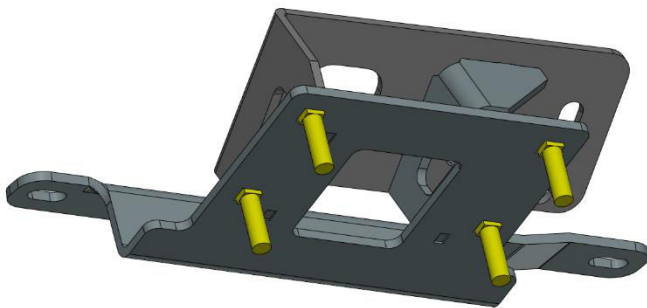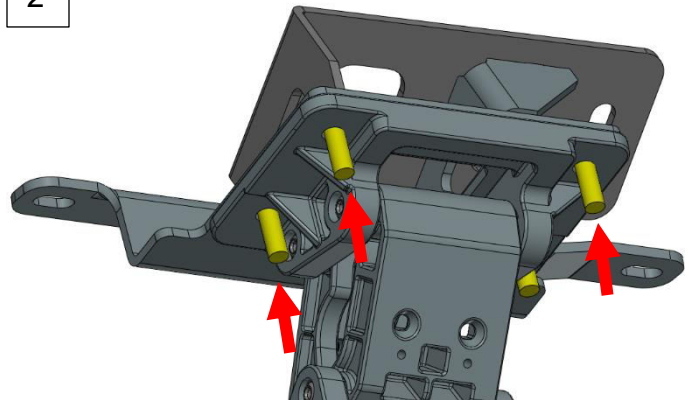
1**2**

3

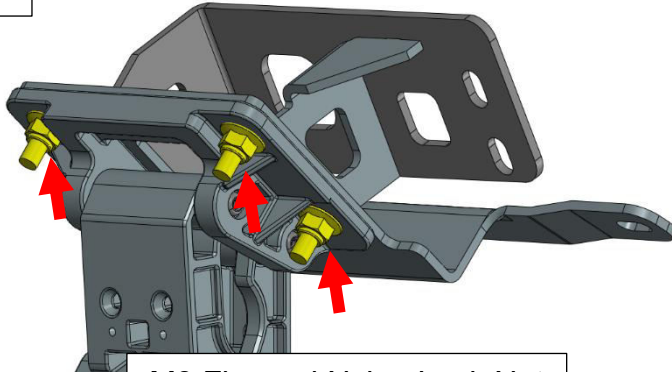

M8 Flanged Nylon Lock Nut

4

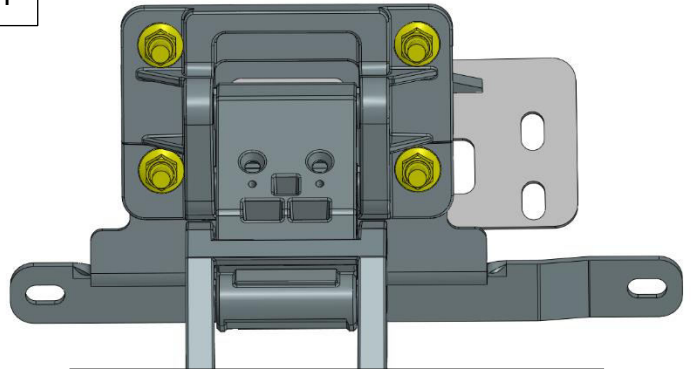



Tighten the M8 Flanged Nylon Lock Nuts all the way until tight.

2

Locate Driver Side front mounting points on the rocker panel under the front door. Remove the OE rubber plugs and insert the bolt plates into the mounting holes. Use plastic retainers to fix the position of the bolt plates. Outer mounting points use the larger bolt plates, the inner bolt plate uses the smaller bolt plate.



Locate Driver Side rear mounting points on the rocker panel. Use plastic retainers to fix the position of the bolt plates to the outer mounting points. Rearmost hole is very shallow. Make sure the bolt plate is seated in as much as possible.

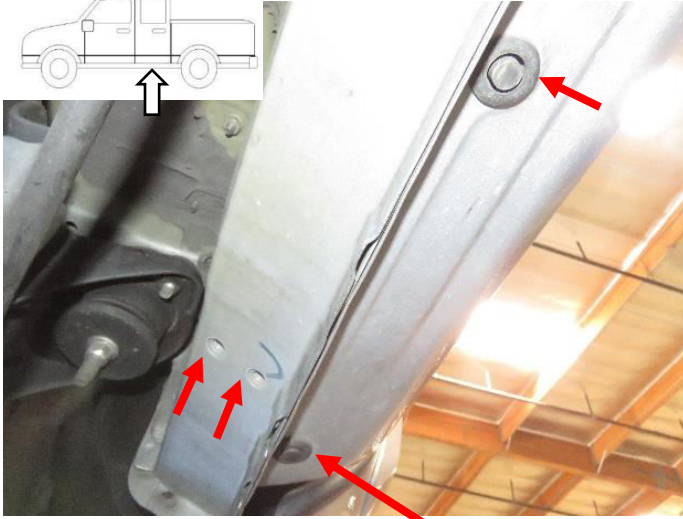


Mounting hole is very shallow




3

Next, line up front bracket slots to the threaded inserts and place Driver Side/Left Front Bracket Assembly (A) onto the vehicle. Then fasten Hex Nuts (P), Lock Washers (I), and Flat washers (G). Do not tighten all the way yet.

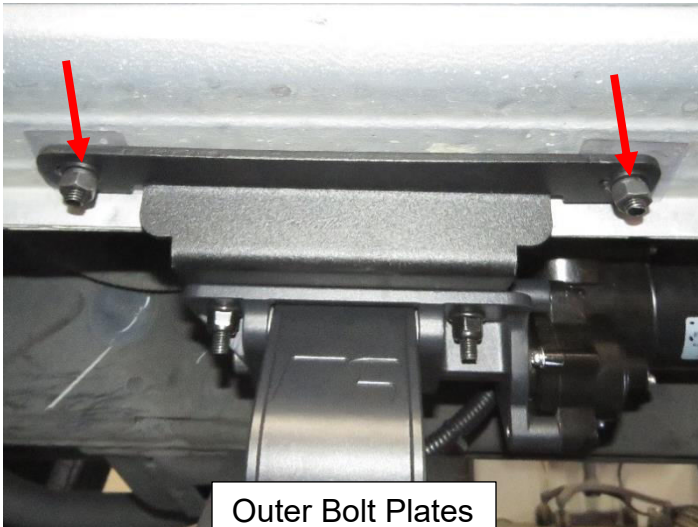


Outer Bolt Plates

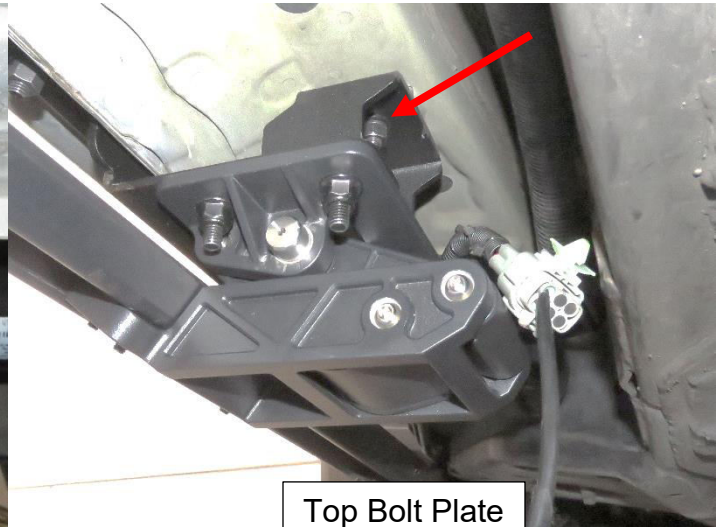


Top Bolt Plate

Locate rear mounting points. Next, line up rear mounting bracket slots to the threaded inserts and place Driver Side/Left Rear Bracket Assembly (B) onto rocker panel. Then fasten Hex Bolts (H), Lock Washers (I), and Flat washers (G). Use Hex nuts (P) to fasten on to bolt plates. Do not tighten all the way yet.

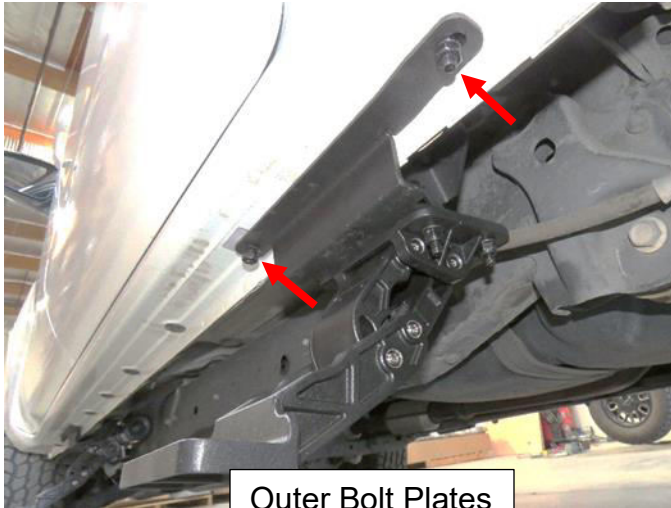

Outer Bolt Plates

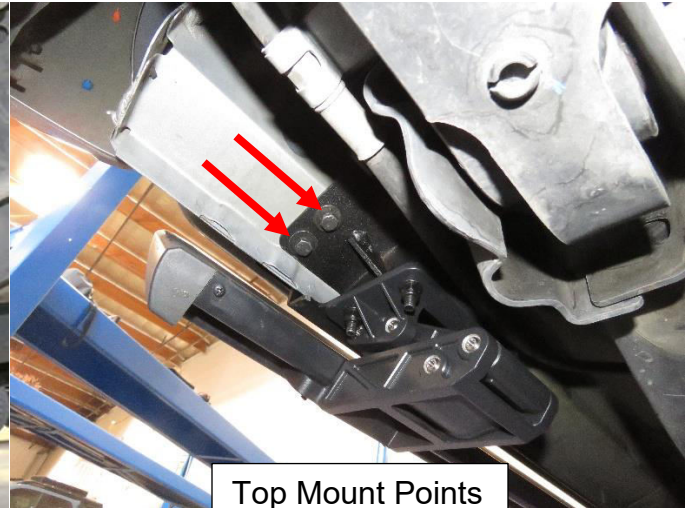


Top Mount Points

4 Repeat steps 1 – 3 for the Passenger Side.


5 Start from the engine compartment by opening the front hood of the vehicle. Locate the Battery and its terminals (positive/negative). Remove the 25A fuse from the fuse box that comes with the main harness (J).

***WARNING:** Keeping the fuse connected to the fuse box may result in electrical sparks and risk of shorting when working with the battery.

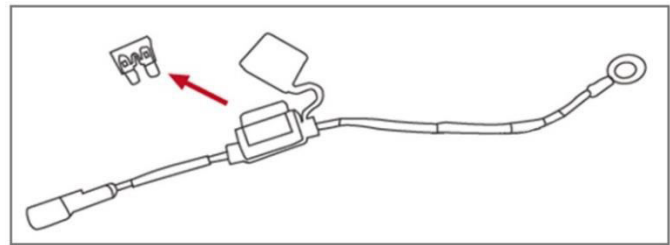

Open fuse holder cap and remove fuse


6 Connect the positive power lead on the main harness (J) to the positive battery terminal. Connect the negative lead to the negative battery terminal. Make sure both power leads are fully secured. Connect the ECU (M) to the main harness. Connect the Short LED Y-Harness (K2) to the Driver-side branch of the main harness. Connect the Long LED Y-Harness (K1) to the Passenger-side branch of the main harness.

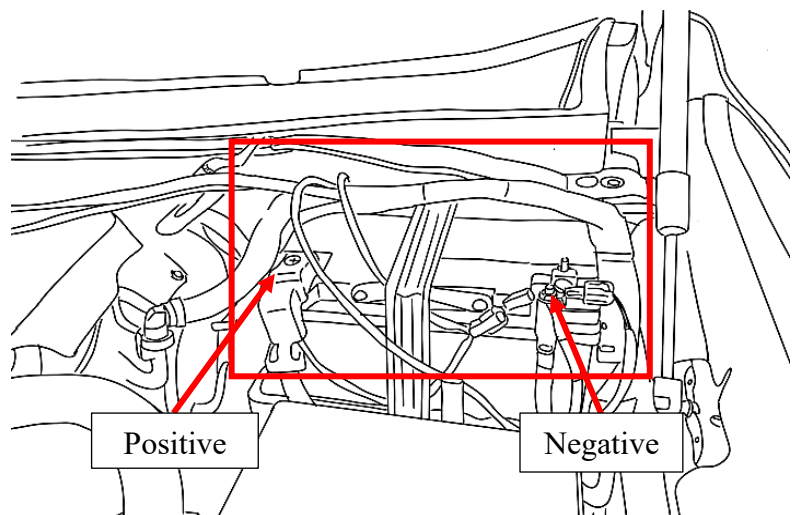

***NOTE:** Battery is on Driver Side of engine compartment.

7

Route the main harness (J) around the battery, up along the rear of the engine compartment. The longer Driver-side branch of the main harness must route down the backside, against the fire wall, and down past the steering column towards the vehicle frame. **Be sure to avoid contact with the steering column.**

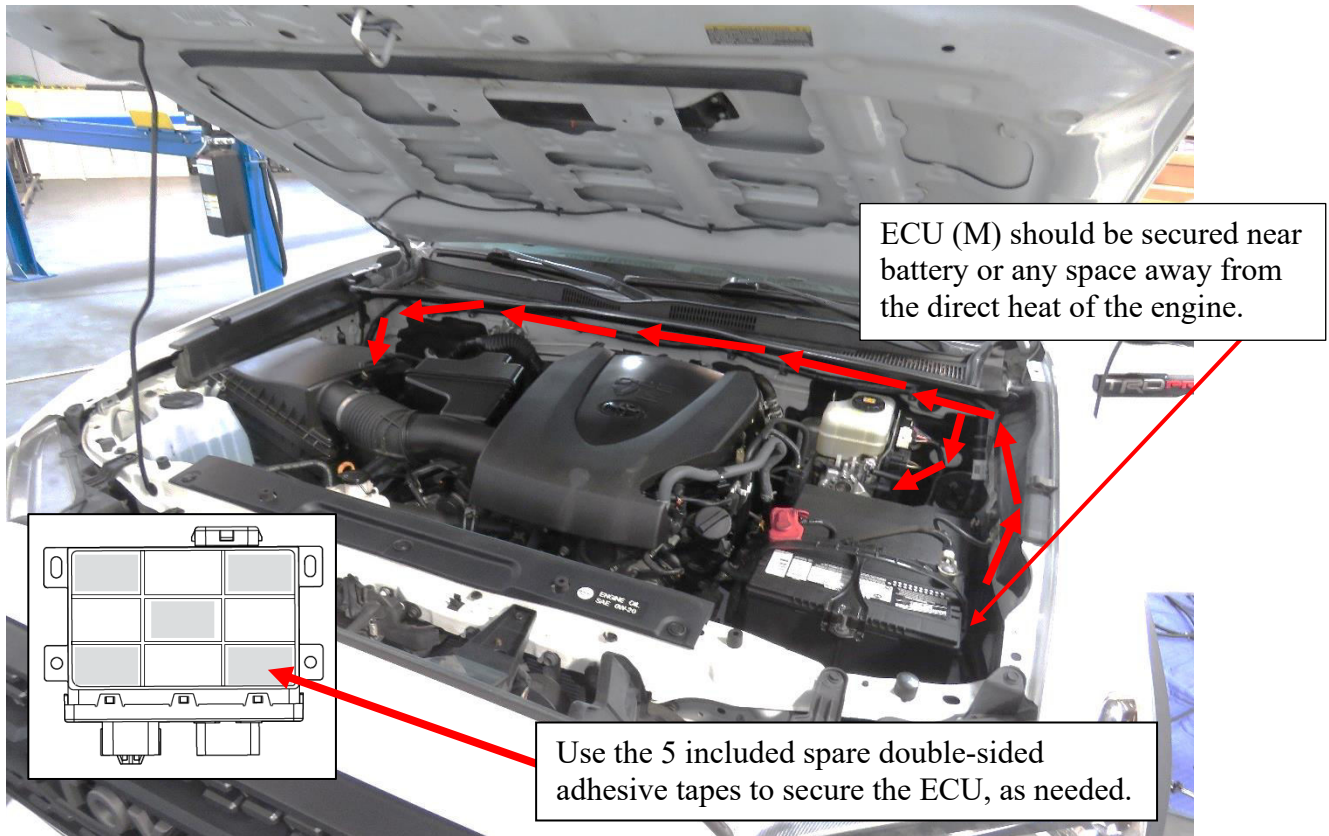

Route the shorter (marked "Passenger-side") leg of the harness down the Passenger-side wheel well. **Be sure to avoid contact with any moving or hot engine components.** Attach and secure the main harness (J) with supplied cable ties.

8



Be sure the harness avoids contact with the suspension and steering column.

Inside the vehicle cabin, remove the driver-side front kick panel and bottom door sill panel. Peel back the carpet to access the hole with a removeable grommet. This is the hole where the signal wires from the Main Harness (J) will need to feed through.




9

On the underside of the driver side, locate and remove the floor grommet in the floor panel above the frame. The grommet will be in a tight space above the frame and OE conduit. Poke a hole through the grommet and thread the two signal wires through and up into the vehicle cabin.

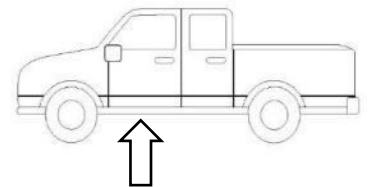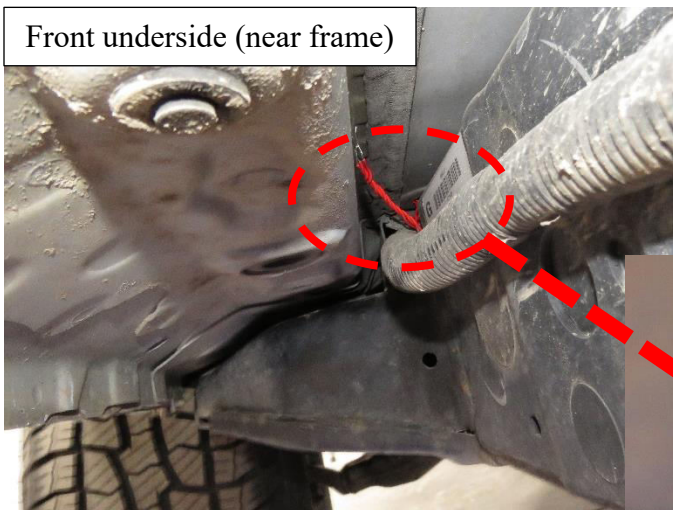

Carefully put wiring through rubber floor plug

Enlarged depiction of floor hole

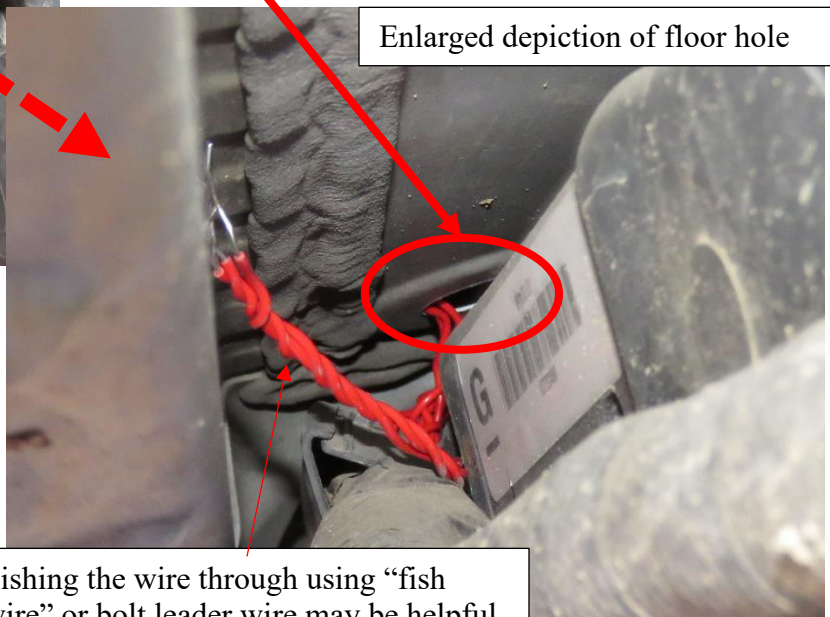

*NOTE: There are two holes the wiring harness must pass through, 1 inside cabin and 1 on underside belly. Each has a rubber grommet (total 2 grommets). The 2 holes are not always aligned; thus, some finesse and fishing may be needed.

*NOTE: Red wires are for routing demonstration purposes only.


Fishing the wire through using “fish wire” or bolt leader wire may be helpful.

10

Locate the white OEM CAN Junction connector under the steering wheel, behind the kick panel. Be sure vehicle is not powered on. Locate the large bundled harness of wires on the backside of the junction (top of the stack of connectors). There should be several pairs of twisted colored wires in the wire harness bundle.



On the white connector, identify the Teal and White wires. Connect the High and Low wires from the main harness (J) using the supplied wire taps (L). After successfully connecting the wires, return the connector back into its place and check that it is secure.


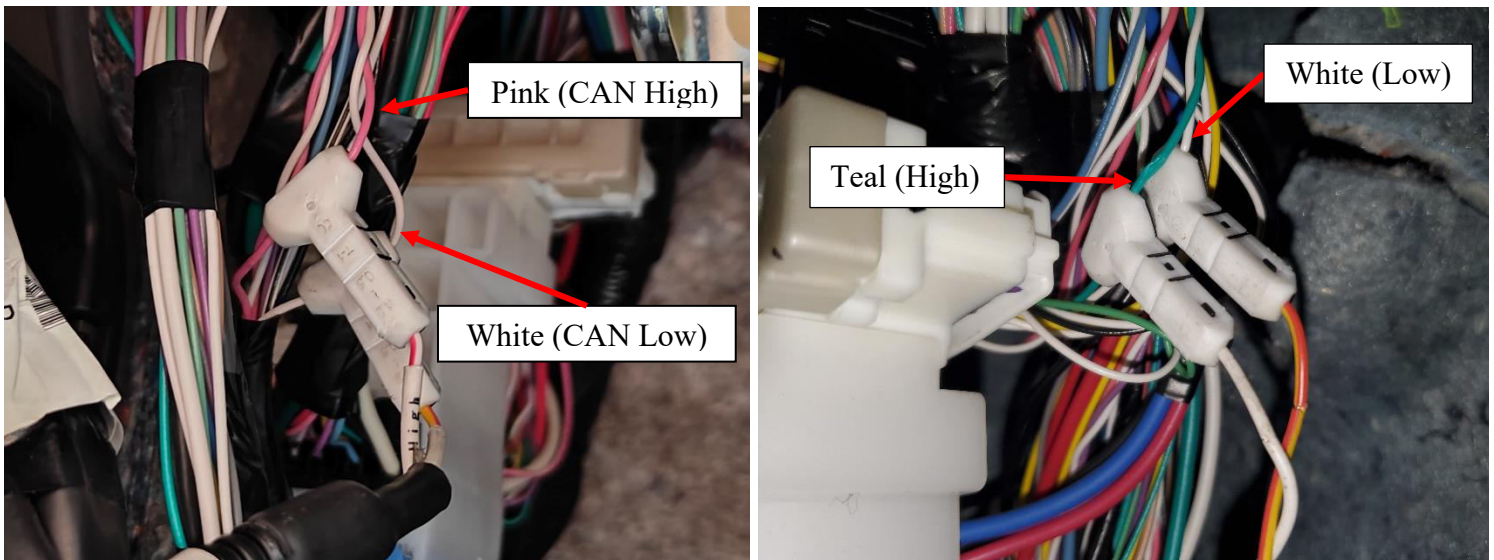


Factory CAN Wire/ Data Line	Power Step Main Harness Wire Color
Teal/ Pink (High)	White (CAN-H)
White (Low)	Yellow (CAN-L)


*NOTE: On some vehicle trims, the colors of the wires may be different. In these cases, the white wire of the twisted pair is always "CAN Low". The colored wire is "CAN High".

Wire taps supplied with kit.
Please see next page for guide.

The kit comes supplied with wire taps called "shark taps". Follow the guide below to tap the wire using the "shark tap":

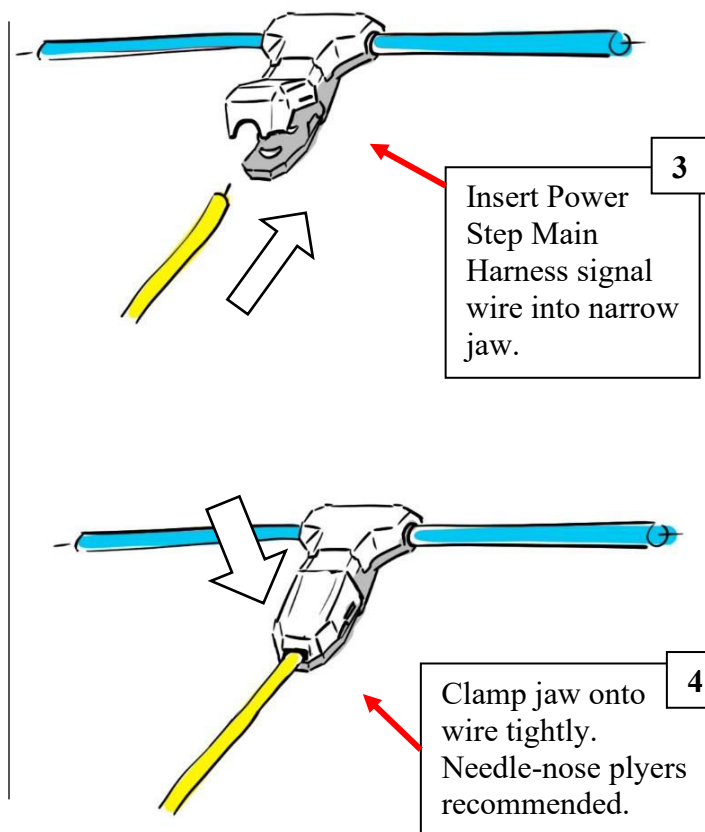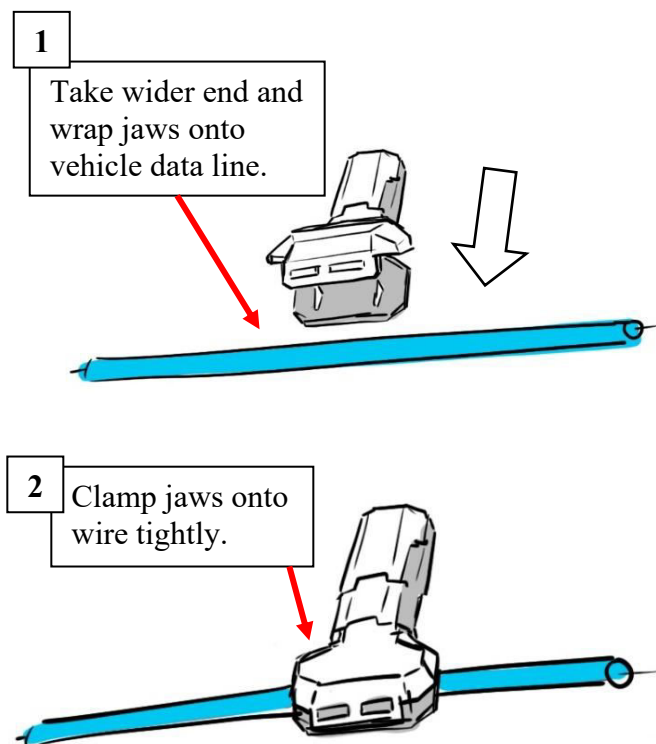

NOTE: Make sure wire is seated properly in the jaws before clamping. The wire being tapped must be centered on the "teeth" to make a proper tap.


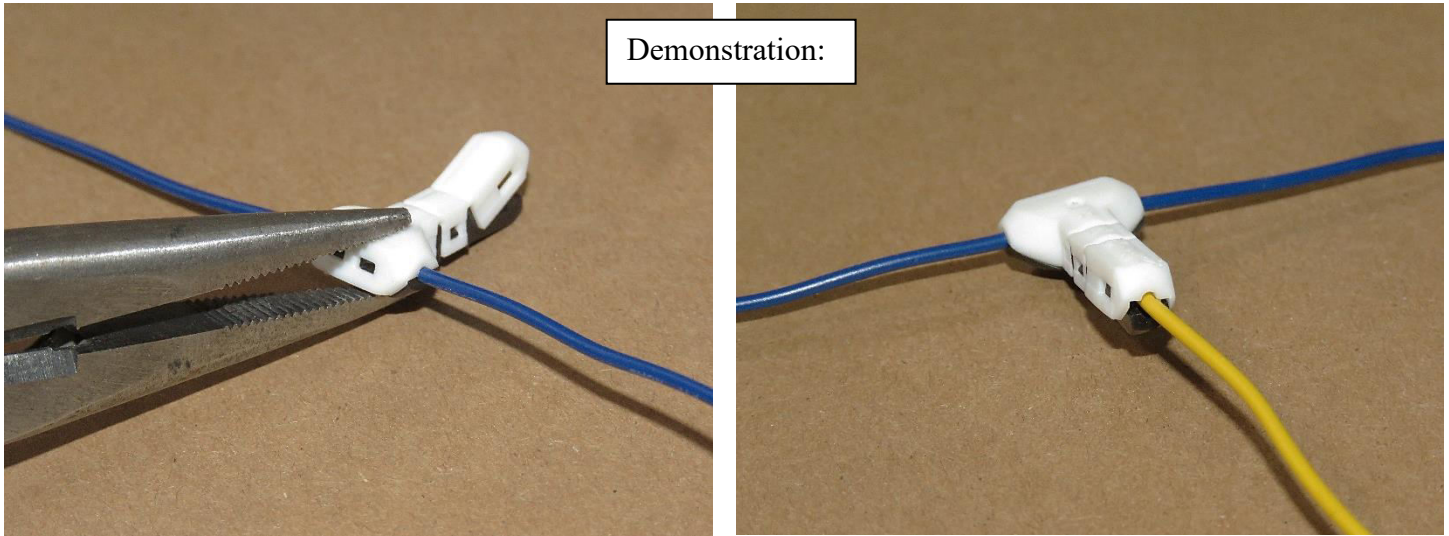
**11**

Attach the main harness (J) to the LED Y-Harness (K). Then attach the LED Y-Harness (K) to the motor on the Driver Side. Repeat for Passenger Side. The shorter LED Y-Harness should connect to the motor that is on the same side as the ECU.

Driver side

**12**


Plug in LED lights (N) into LED Y-Harness (K) and attach them to the bottom of the rocker panel. Use provided 3M double sided adhesive tape on back of LED light (N). Replace Fuse into Fuse Box.

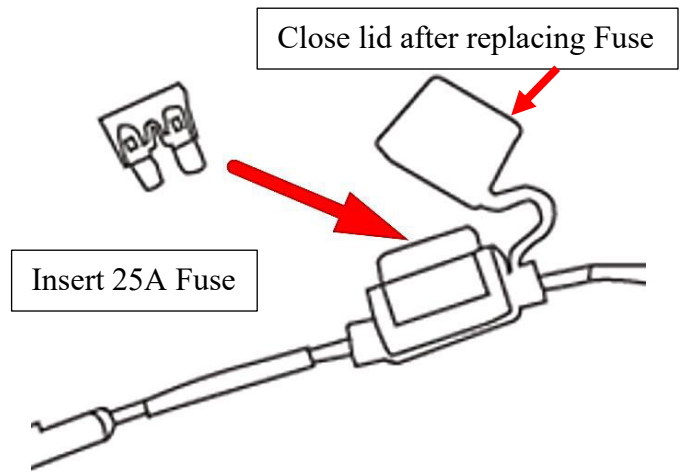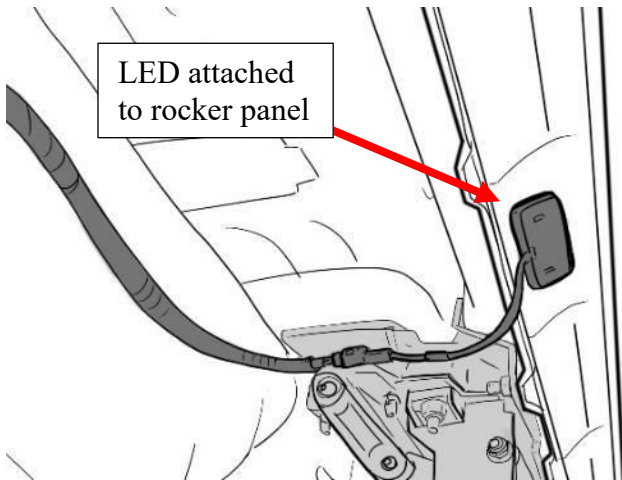

13

Check to make sure the harnesses on the Driver Side/Left Front Bracket Assembly (A) and Passenger Side Front Bracket Assembly (C) are connected to the main harness (J) via the LED-Y harnesses (K).


*NOTE: The linkage arms on the front bracket assemblies will not move unless both motors are connected.

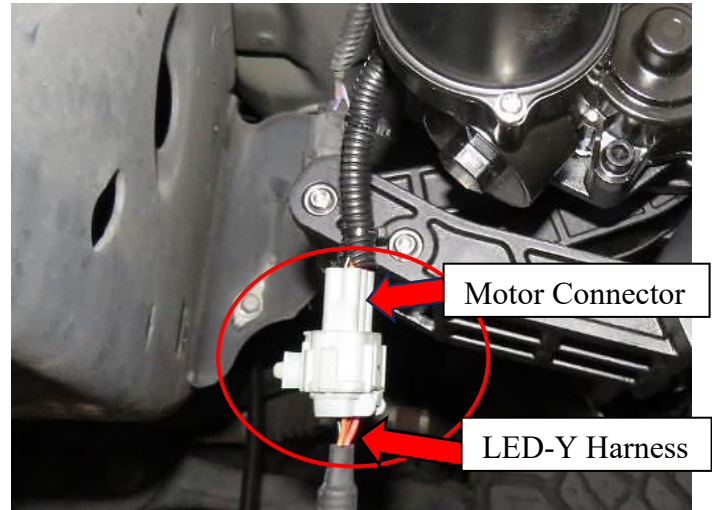


14

Seal the grommet with RTV Silicone Sealant.


Hide wires and reattach the kick panel with the carpet fully unfurled in its original position. Reattach the door sill panel and check to make sure there are no obstructions or potential snag points around the brake pedal area.

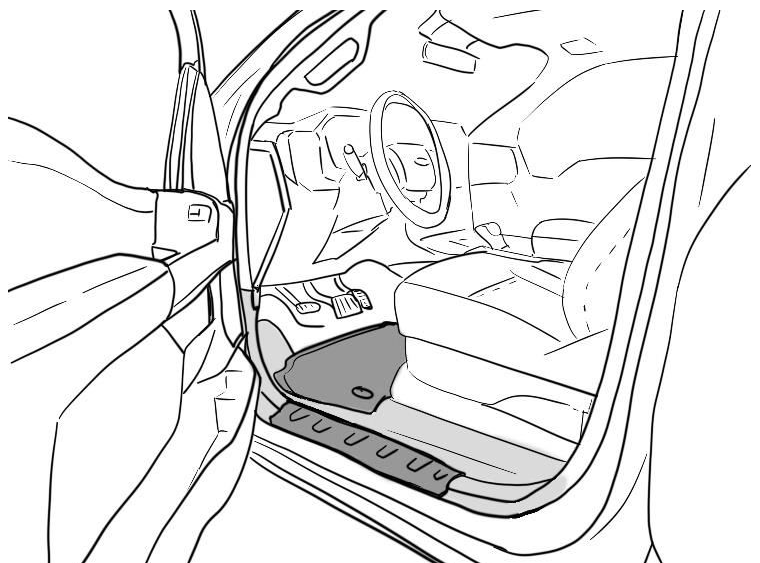

- 15** Prepare the power step boards. Locate the end of the boards and slide the M6 Carriage Bolts (E) into the channel on the underside of the board. Insert a total of 8 carriage bolts (E).

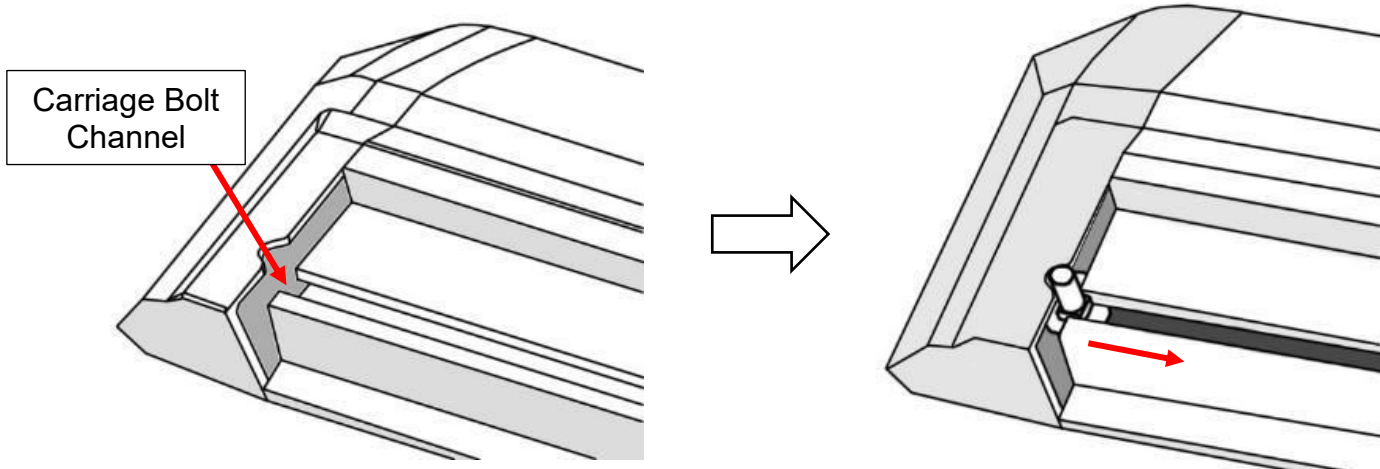


Use the notch in the board's end caps to feed the bolts into the channel.

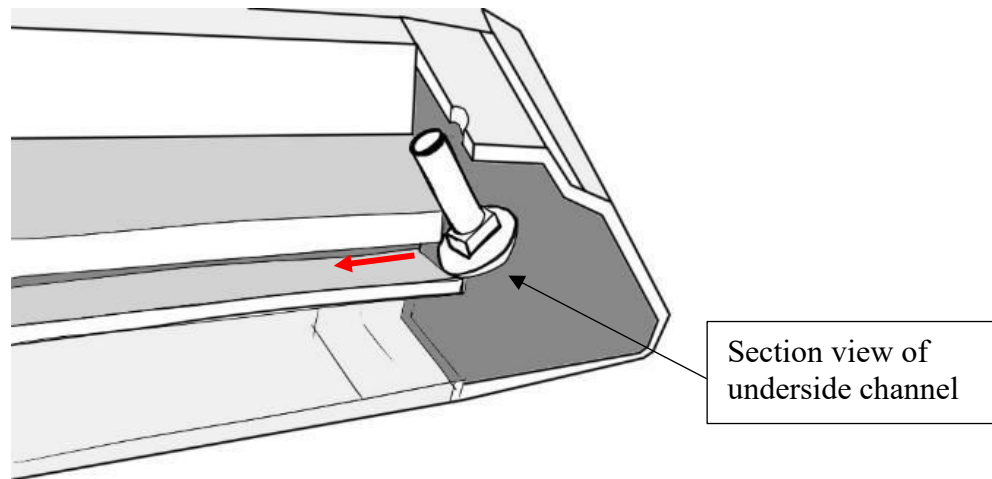

- 16** Perform a function check by closing the driver side front door and opening it again. The front bracket assembly (A) motor should activate the linkage arm and move it into the down or "deployed" position.

After deploying linkage arms, unplug the motor connector from the LED-Y harness (to cut power to the linkage arms), while front door is open, to hold deployed position for running board installation.

Line up the carriage bolts (E), under the power step boards, with the slots on the linkage arms (A & B). Insert the 8 carriage bolts (E) into the slots on front and rear linkage arms. Adjust board to desired position. Moderately hand tighten the 6mm Flat Washers + 6mm Nylon Lock Nuts (F) onto the carriage bolts.

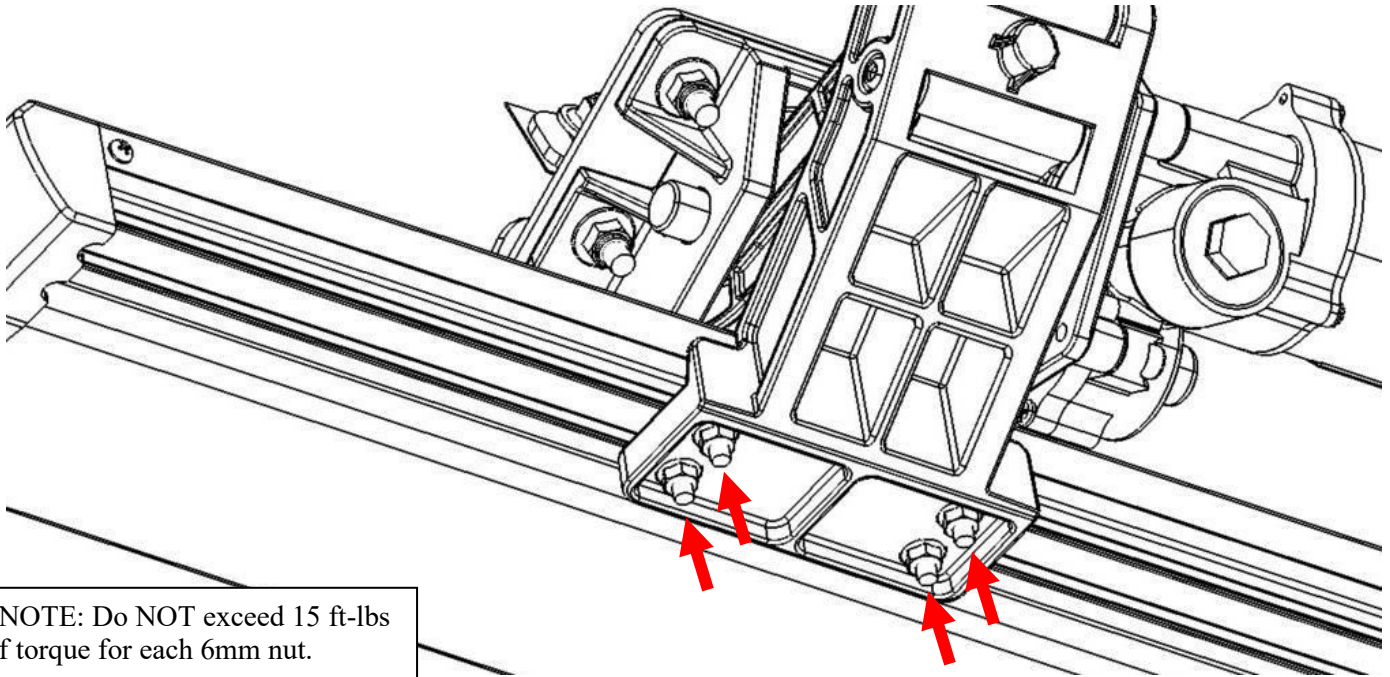

*NOTE: Do NOT exceed 15 ft-lbs of torque for each 6mm nut.

Once the board is adjusted, plug in the motor connector to the LED-Y harness (to return power to the linkage arms), making sure that the door remains open. Proceed to open and close doors several times to deploy and retract the steps to settle the steps into their natural alignment. After cycling the step, tighten all hardware on the board and brackets.

Some further adjustment may be required for desired step position. Repeat for passenger side.

17

Perform system check and troubleshooting. If board is making irregular movements or noise, readjust the boards as follows:

- a) With board deployed loosen 6mm nuts under board.
- b) Leave the nuts slightly less than snug.
- c) Open and close door several times for board to settle into position.
- d) With the step in the deployed position, gradually tighten nuts while alternating between each. Do not over tighten.

If board is making abnormal noise or the motion is binding, repeat steps “a” through “d”.

Note: If the above method does not resolve the issue, the brackets mounting to the vehicle may not be aligned properly with the vehicle. In this case, remove the board and realign brackets before attempting steps “a” to “d” once again.

18

Reinstall any remaining trim panels if necessary. Check and make sure all hardware is fully tightened. Perform a final system check. Finish.



*NOTE: If board does not move during troubleshooting, check the wire connections and CAN taps.

Toggle Switch Optional Accessory

If you purchased the toggle switch accessory, please refer to the detailed instruction sheet included with the toggle switch kit.

FINAL REMARKS

- Ensure there are no debris or obstacles preventing the power steps from operating.
- Open and close each door on both sides to ensure that power steps are operating correctly.
- Check and ensure that all electrical connections are stable and secure.
- Check and ensure that the fuse is placed into the main harness.
- Check and ensure that the CAN tap connections are fully engaged and are seated completely.
- Recheck that all mounting hardware is tight.
- Adjust mounting brackets or running board to enable smooth operation even after having stepped on the deployed boards.

MAINTENANCE AND CARE

- Periodically clean the linkage arms and motor of any dirt or debris that may accumulate.
- Avoid spraying the motors directly with high pressure liquids.
- Avoid damaging the power steps.
- Ensure power step ECU is not exposed directly to water to prevent degradation.
- Ensure wiring is properly tucked away and concealed from mechanically moving parts and exposure to high heat or very low temperature conditions.
- Periodically recheck that all mounting hardware is tight
- Do not overload the running board.
- Readjust running board if necessary.

WARNING AND SAFETY

- Do not use boards as a rock slider or as skid protection.
- Do not use solvents, chemicals, oils, or corrosive liquids on power steps. If the power steps encounter these substances, clean the power steps as soon as possible. Mild detergent and water is recommended.
- Do not obstruct the power steps in any way during operations of deployment and retraction.
- Do not rely in any way on the components of this product to keep occupants within the vehicle or to protect against injury or death in the event of an accident.
- Do not sit/stand on the running board for long periods of time.
- Do not jump on power step board or rest heavy objects on boards or subject power steps to excessive force.
- Do not step on plastic end caps of the boards. Failure to do so may result in injury.
- Do not place bodily appendages between running board and the vehicle body. Please mind the gap between the vehicle and the board.
- Do not allow children to use power steps without adult supervision and proper operation. This is not a toy. Improper use may result in injury.
- Remove the fuse on the power lead on the main harness before doing electrical troubleshooting to avoid risk of shock or injury. Make sure the motors do not have power before working on mechanical adjustments to avoid injury.