

Reach-in Refrigerator

Double-Door Reach-In

MODEL

KUTF 2 SS

- Stainless-steel exterior on the front and sides.
- Entirely stainless steel interior.
- Coved corner floors meet NSF standards.
- 2-3/8" thick "Ecomate™" insulation.
- In-step interior design to prevent sweating.
- Magnetic one-piece door gasket, removable without tools.
- Full-length door handles.
- Universal key door locks for enhanced security.
- R290 Hydrocarbon refrigerant, to meet DOE's Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).
- Hermetic compressors with epoxy-coated evaporator.
- Automatic evaporator system without paper fins for improved efficiency.
- Electronic controller with digital display.
- Compatible with standard 18" x 26" sheet pans.
- 5" castors with front brakes for mobility and stability (castors need to be mounted upon installation).
- LED interior lighting for clear visibility.
- NSF-7 certified, meeting stringent food safety standards.



KUTR2SS

ELECTRIC

- 115V / 60Hz / 1Ph
- NEMA 5-15P

TEMPERATURE

- 32°F to 38°F (at 100°F ambient and 65% RH).

| MODEL | DOORS | SHELVES | CAPACITY | | EXTERIOR DIMENSIONS (in) | | | SHIPPING | |
|-----------|-------|---------|-----------------|--|--------------------------|--------|--------|----------|-----------------|
| | | | ft ³ | | Width | Depth | Height | Lbs | ft ³ |
| 0 | | | | | | | | | |
| KUTR 2 SS | 2 | 6 | 49.0 | | 55-1/4 | 31-1/8 | 83-1/2 | 459 | 88.3 |

Height includes casters.

Revision Date: February, 2026

Kutano assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.




Reach-in Refrigerator

Double-Door Reach-In

MODEL

□ KUTF 2 SS

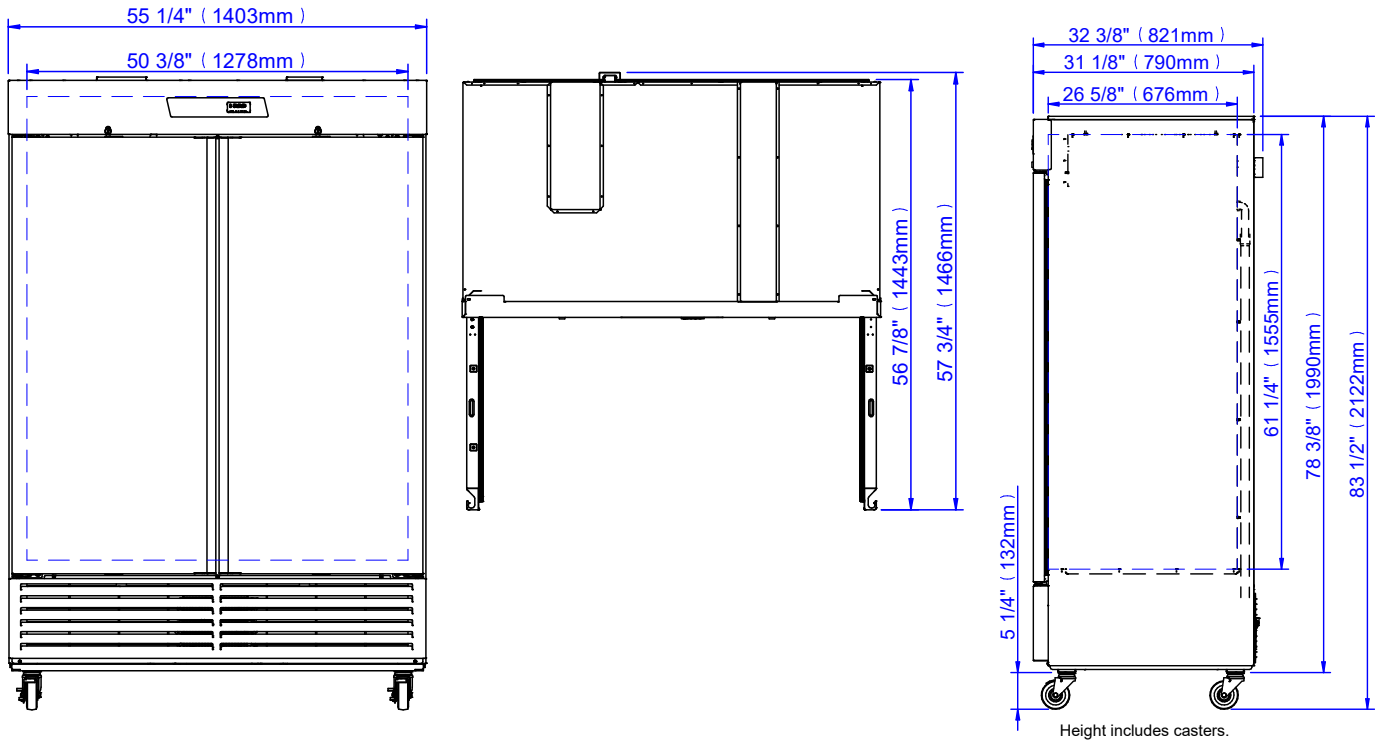

| MODEL | KUTR 2 SS |
|---------------------------------|-----------------|
| ELECTRICAL DATA | |
| Volts - Frequency | 115V. - 60Hz. |
| Power (HP) | 1/3 |
| Full Amp Load | 3.2 |
| Plug Type | NEMA 5-15P |
| Refrigerant | R290 |
| INTERIOR DIMENSIONS (in) | |
| Width | 50-3/8 |
| Depth | 26-5/8 |
| Height | 61-1/4 |
| Shelf (in) | 23-5/8 x 22-1/2 |
| SHIPPING DIMENSIONS (in) | |
| Width | 56-1/4 |
| Depth | 32-1/4 |
| Height | 84-5/8 |

Revision Date: February, 2026

Kutano assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

