



**EN - USE AND MAINTENANCE
MANUAL**

FITT HOSE REEL



USA.FITT.COM

EN

Important safety and installation instructions. Please read and follow all warnings and instructions before using this product. Injury can result from improper use.

Thank you for your purchase of the product!

Installing your new hose reel is as easy as 1-2-3

USE AND MAINTENANCE MANUAL

USE ON THE FLOOR

p. 03

USE AND MAINTENANCE MANUAL

USE ON WALL MOUNT

p. 08

MORE INFORMATION

p. 14

CONTENT OF THE BOX

1x Hose reel
1x Upper handle with sleeve cover
1x Main hose with quick-fit adapter
1x Leader hose

Bag content
1x Instruction sheet
4x Foot protectors
1x Hose reel handle
2x Wall brackets
2x Screws for wall bracket
2x Wall bracket pin

FOR USE ON THE FLOOR

INSTALLATION INSTRUCTIONS


STEP 01



STEP 02


**HOLD THE BLACK INSERT FOR THE HANDLE
WHILE INSTALLING**

TIGHTEN THE CAP

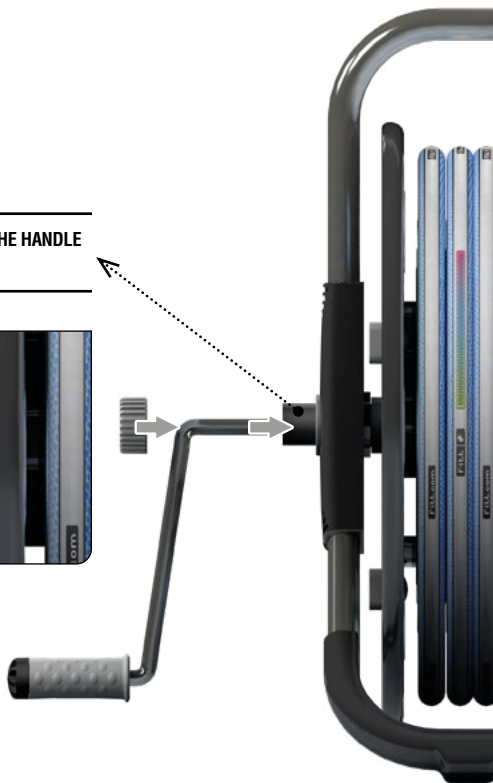

STEP 03

TIGHTEN THE CONNECTION




STEP 04



STEP 05

TO CONNECT MAIN HOSE

TIGHTEN THE CONNECTION



FOR USE ON WALL MOUNT

INSTALLATION INSTRUCTIONS


STEP 01




STEP 02

**HOLD THE BLACK INSERT FOR THE HANDLE
WHILE INSTALLING**

TIGHTEN THE CONNECTION

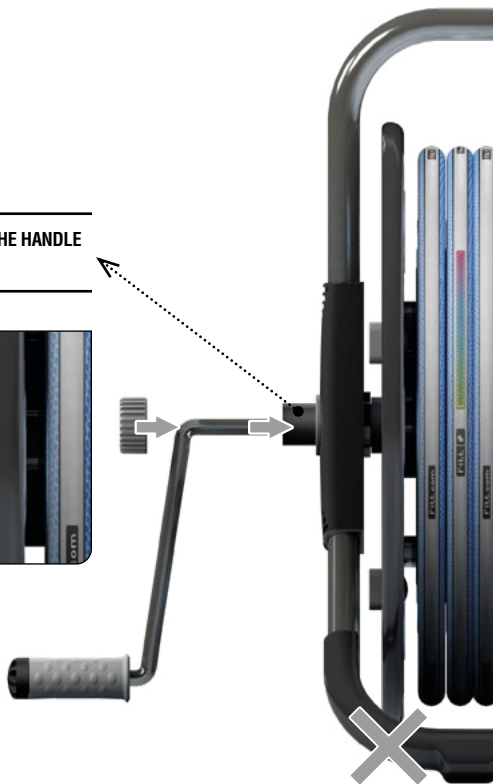


STEP 03

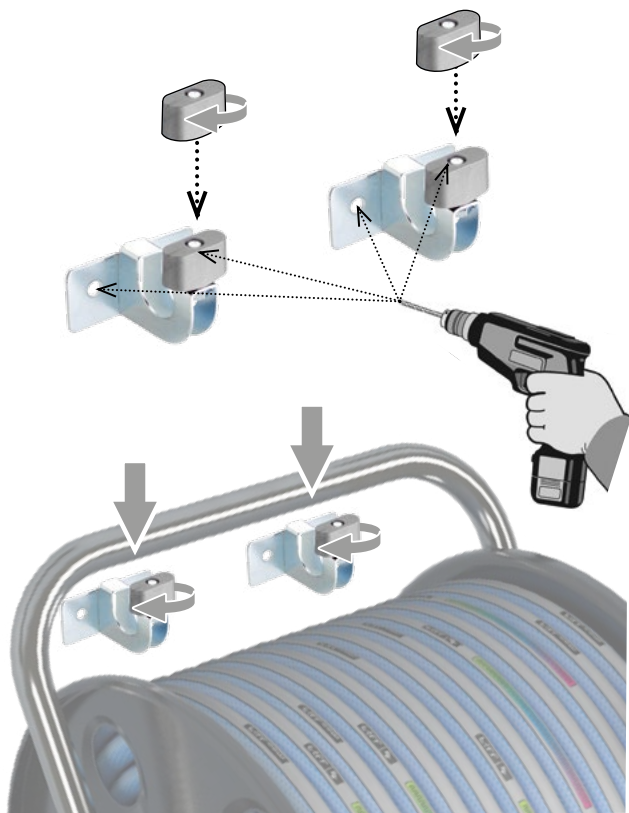

STEP 04

TIGHTEN THE CONNECTION




STEP 05



STEP 06

TO CONNECT MAIN HOSE


TIGHTEN THE CONNECTION



SAFETY WARNINGS

- Our product is intended for outdoor watering applications only
- Not for hot water use
- Do not leave under pressure when not in use
- Do not leave unattended children to use the product
- Do not leave out on freezing temperatures
- Store indoors in winter
- Coupling protection: to avoid any kind of corrosion causing fusion between the faucet and the coupling on the hose, we suggest disconnecting and reconnecting the hose from any metal spigot a minimum of 3 times per year.

REMOVABLE COUPLINGS



As part of the FITT commitment to sustainability, the Aquamaster hose is supplied with removeable, reusable couplings. If the hose is damaged, the coupling is simply removed using a ½" hex-key and a pair of adjustable pliers and is easily reattached once the damaged hose is removed, extending the life of the hose. Please download the instruction manual for more details on repairing

your Aquamaster hose.

-
- Optimum working pressure from 29 up to 100 psi (FITT Quantum)
 - Optimum working pressure from 29 up to 170 psi (FITT Quantum Tech)
 - Bursting pressure 350 psi (FITT Quantum)
 - Bursting pressure 500 psi (FITT Quantum Tech)
-

 and **fitt** are registered
trademarks of FITT S.p.A.

The medium metallic graphite gray color of the
hose coupling is a Registered U.S. Trademark
of FITT S.p.A.

The gray stripe is a trademark of Fitt S.p.A.

usa.fitt.com

FITT GARDENING SOLUTIONS

This is the business area of the FITT group that develops solutions and products for gardening, irrigation, cleaning and outdoor life applications for hobby and professional use, such as hoses for camping, watering ornamental gardens, terraces and vegetable gardens, washing cars, bicycles and pets.

Certified



This company meets high standards of social and environmental impact.

Corporation

For more information:

FITT USA Inc.

Mooresville, North Carolina USA
customer care.usa@fitt.com
usa.fitt.com

