

Reach-in Freezer

Single-Door Reach-In

MODEL

KUTF 1 SS

- Stainless-steel exterior on the front and sides.
- Entirely stainless steel interior.
- Coved corner floors meet NSF standards.
- 2-3/8" thick "Ecomate™" insulation.
- In-step interior design to prevent sweating.
- Magnetic one-piece door gasket, removable without tools.
- Field reversible door.
- Full-length door handles.
- Universal key door locks for enhanced security.
- R290 Hydrocarbon refrigerant, to meet DOE's Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).
- Hermetic compressors with epoxy-coated evaporator.
- Automatic evaporator system without paper fins for improved efficiency.
- Electronic controller with digital display.
- Compatible with standard 18" x 26" sheet pans.
- 5" castors with front brakes for mobility and stability (castors need to be mounted upon installation).
- LED interior lighting for clear visibility.
- NSF-7 certified, meeting stringent food safety standards.



KUTR1SS

ELECTRIC

- 115V / 60Hz / 1Ph
- NEMA 5-15P

TEMPERATURE

- 0°F to -8°F (at 100°F ambient and 65% RH).

MODEL	DOORS	SHELVES	CAPACITY	EXTERIOR DIMENSIONS (in)			SHIPPING	
			ft ³	Width	Depth	Height	Lbs	ft ³
0								
KUTF 1 SS	1	3	23.0	28-1/8	31-1/8	83-1/2	289	49.4

Height includes casters.

Revision Date: February, 2026

Kutano assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.






Reach-in Freezer

Single-Door Reach-In

MODEL

□ KUTF 1 SS

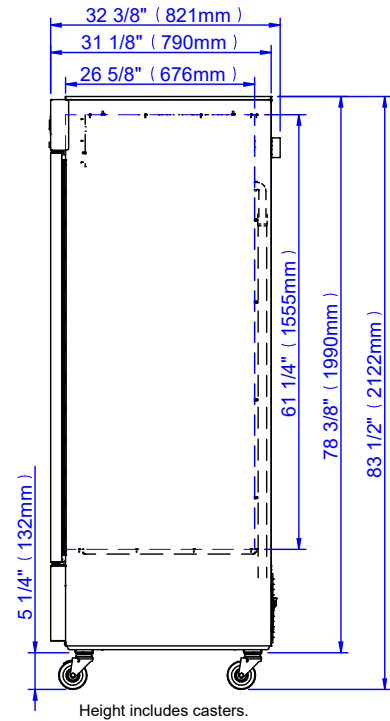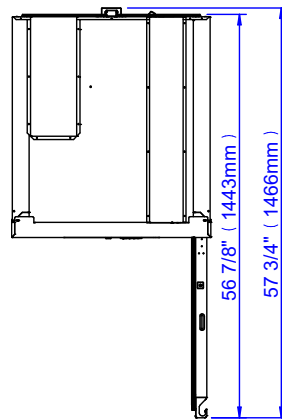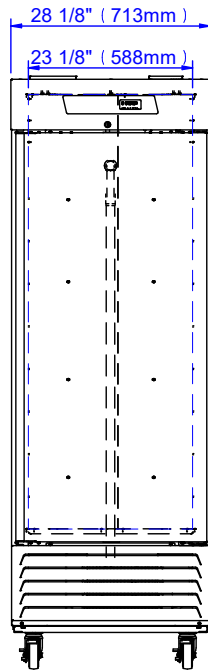

MODEL	KUTF 1 SS
ELECTRICAL DATA	
Volts - Frequency	115V. - 60Hz.
Power (HP)	1/2
Full Amp Load	5.0
Plug Type	NEMA 5-15P
Refrigerant	R290
INTERIOR DIMENSIONS (in)	
Width	23-1/8
Depth	26-5/8
Height	61-1/4
Shelf (in)	23-5/8 x 22-1/2
SHIPPING DIMENSIONS (in)	
Width	33-1/2
Depth	29-1/2
Height	84-5/8

Revision Date: February, 2026

Kutano assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

