

SUITE MIRROR

PRODUCT SPECIFICATION

KARA

FRONT-LIT CABINET



FEATURES

- LED technology
- 3-in-1 adjustable color modes - 3000K, 4000K, 6000K
- Dimmable using touch button
- CRI80+
- UL certified
- 120V hard-wired electrical connection
- Vertical mount
- 1 year warranty

SAFETY SPECIFICATION

- Entire assembly meets UL Canada & US standards
- Safety-backed mirror



Part Number	Kelvin Temperature	Lumens	Power Rating	Dimensions	Weight	IP Rating
CKARA2432CCT-TS	6000K/3000K	2650	22W	24"W x 32"H x 5.4"D (610mmx813mmx138mm)	41.80 POUNDS	IP44
	4000K	5200	44W			

HOW TO USE THE TOUCH BUTTONS

- ON/OFF: Tap the touch button to turn on the light ON and OFF.
- Color Temperature Change: When the light is on, short press the touch button within 4 seconds to change the color temperature from 2700K to 4000K to 6000K.
- Dimming: When the light is on, press and hold the sensor button to dim the light.
 - ❖ The cabinet is equipped with a memory feature to preserve the previous color temperature and brightness settings.






SUITE MIRROR

PRODUCT SPECIFICATION

KARA

FRONT-LIT CABINET

CKARA2432CCT-TS

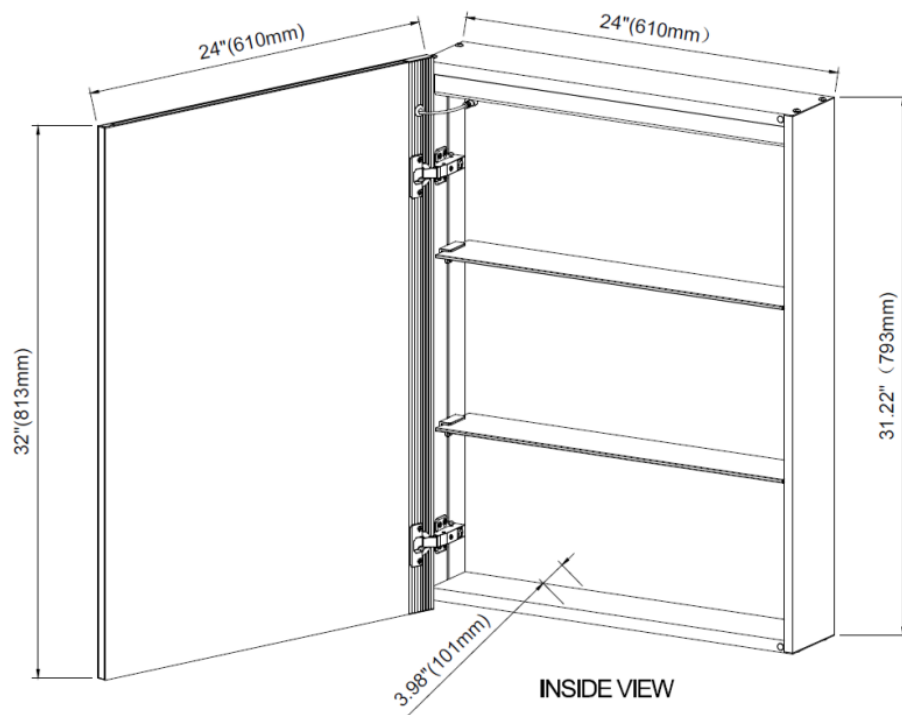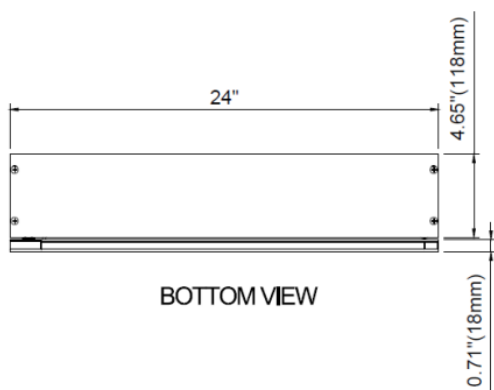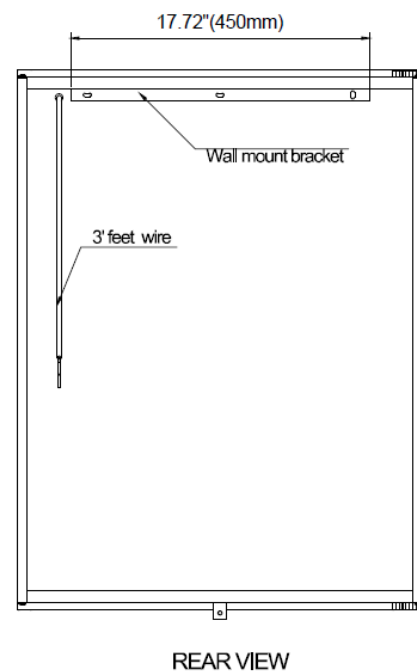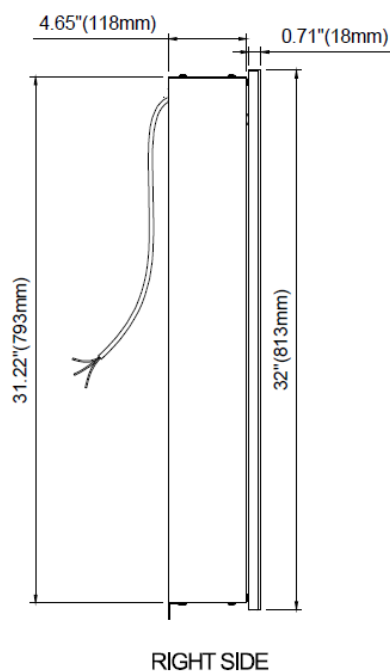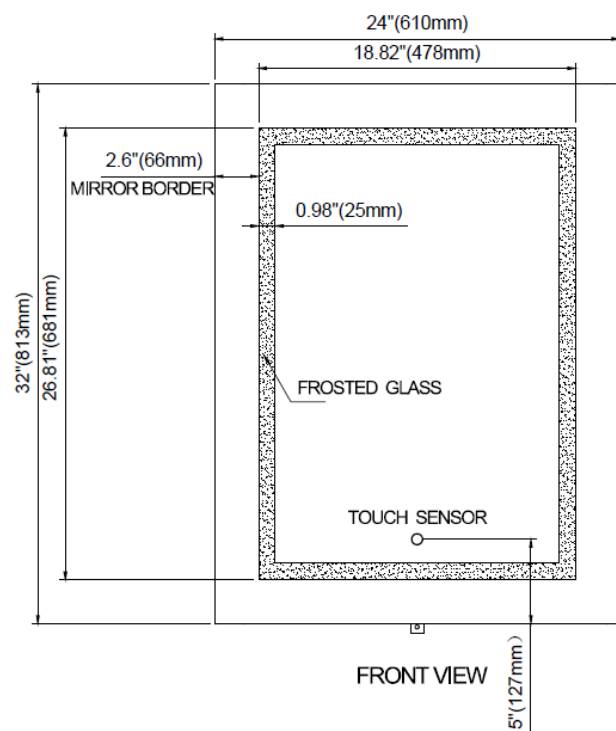

INSTALLATION & AFTER CARE INSTRUCTIONS:

Electrical and Safety Specifications:

- 120V hard-wired electrical connection.
- Mirror cabinet can be turned ON/OFF and dimmed using the integrated touch button.
- Waterproof - IP44 rated.
- Illuminated mirrors have been designed and independently tested for compliance to electrical equipment (safety) regulations, and are ETL Canada & US Certified.
- LEDs have a life expectancy of 120,000 hours of continuous use.

Installation

- Decide on wall positional placement.
- Locate mounting bracket and fix to wall using supplied or correct fixing for your wall type. At the desired height and make sure the bracket is level. Match & attach 3 electrical wires from mirror cabinet to home electrical wires:
 - Live to Live, Ground to Ground, Neutral to Neutral.
- Hang and affix to wall.

IMPORTANT:

- Never leave the door supported with only one hinge attached. Get assistance supporting the door.
- Always switch off the electrical supply at the mains during installation and maintenance. It is recommended that fuse is withdrawn or circuit breaker switched off before installation begins. Fitting in Bathrooms is subject to all regulations. It is not suitable for product installations in saunas, steam rooms, or shower cubicles, and it is recommended for permanent installation.

Care & Safety:

- Wear suitable eye wear protection when drilling. Use caution when using power tools near water, beware of hidden cables or pipes.
- Be cautious if drilling on tiled surfaces in case the drill slips. Applying a piece of masking tape on the wall before marking out fixing holes can help stopping the drill from moving.

Cleaning & Maintenance:

- It is recommended that the unit is cleaned with a soft, dry, non-abrasive cloth when turned off.
- Never use cleaning agents or abrasive material on any type of surface finish.
- Do not strike glass components with hard or pointy items.
- Do not place very hot or cold items against or in close proximity to glass surfaces.