

Features

- Advanced spray engine provides three alternative experiences: wide coverage, intense drenching, and powerful massage
- Powerful massage spray is a focused stream that targets sore muscles, or use as a utility spray to rinse kids, pets, and your shower
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair
- Wide coverage spray produces an encompassing spray for everyday use
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Rite-Temp® pressure-balancing technology maintains water temperature within +/- 3°F
- Antiscald protection
- Single lever handle allows for both on/off activation and temperature setting
- 1.75 gpm (6.6 lpm) maximum flow rate at 45 psi (3.1 bar)
- Box includes: Showerhead, shower arm and flange, faceplate with lever handle, diverter spout with 1/2" NPT or slip-fit connection, and Rite-Temp® pressure-balancing valve with universal 1/2" NPT male connections
- Spot Repel® finishes resist fingerprints, smudges, and water spots
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System

Material

- KOHLER finishes resist corrosion and tarnishing
- Select KOHLER finishes feature ScratchShield® technology which withstands even the toughest daily use

Installation

- Wall-mount

Adapters, Rough-in and Extension Kits

10350 Range: 3-1/2" (89 mm) -
4-1/4" (108 mm)



Codes/Standards

ASME A112.18.1/CSA B125.1
ASSE 1016/ASME A112.1016/CSA B125.16
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass

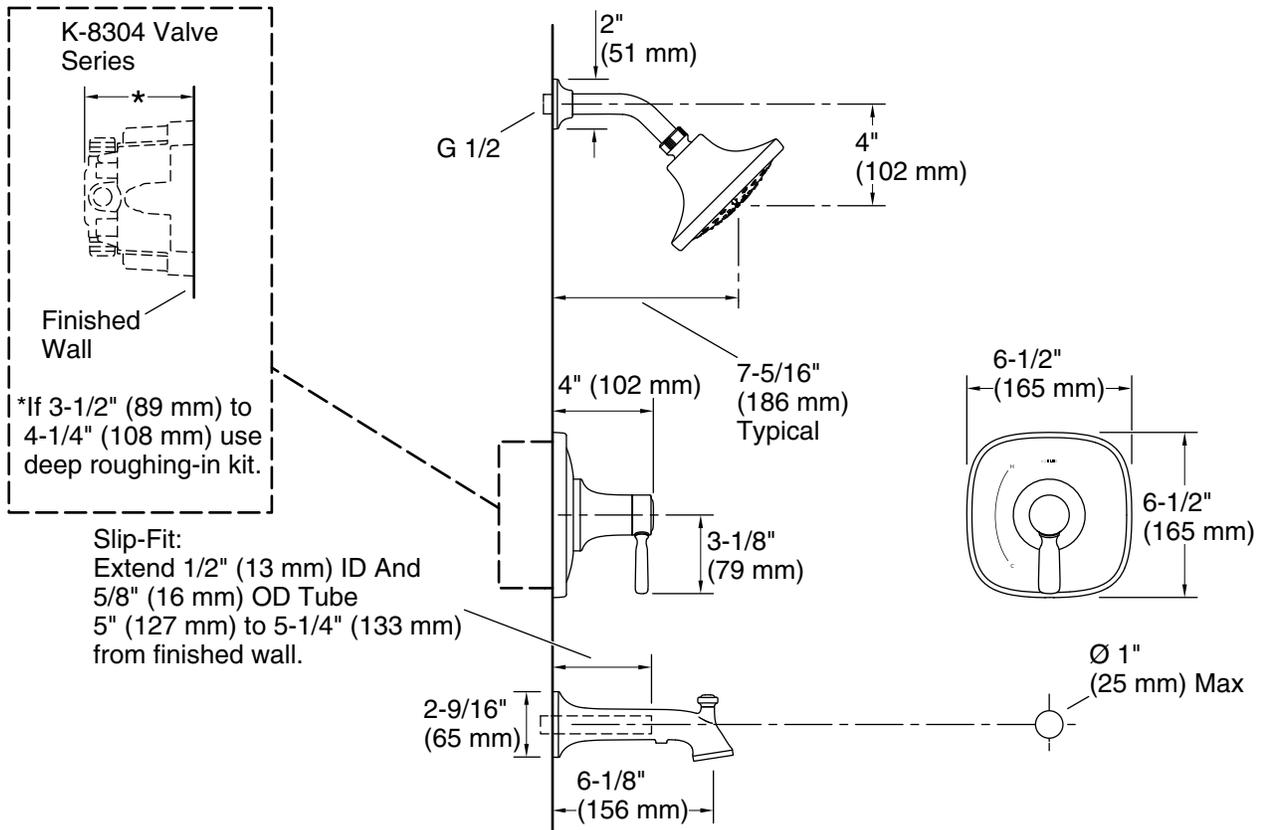

Technical Information

All product dimensions are nominal.

Spout:

Spout reach: 6-5/16" (161 mm)

Shower/Rainhead rated max flow: 1.74 gal/min (6.6 l/min)

Shower Valve:

Flow Rate (Max) @ 45 psi 5 gal/min (18.9 l/min)

Pressure: 45 psi (3.1 bar)

Maximum (Static) Pressure: 125 psi (8.6 bar)

Minimum (Operating) Pressure: 20 psi (1.4 bar)

Notes

Install this product according to the installation instructions.

For use with showerheads or handsprays rated at 0 gal/min (0 l/min) or higher.