

Merchandiser Refrigerator

Single-Door Merchandiser

MODEL

KUTG DM 1

- Chip-resistant black vinyl exterior finish on the front and sides.
- Interior is crafted with NSF-approved white coated steel walls.
- Sturdy stainless-steel floor.
- 2" thick "Ecomate™" insulation.
- In-step interior design to prevent sweating.
- Magnetic one-piece door gasket, removable without tools.
- Double-pane, hinged glass doors with argon gas insulation.
- Field reversible door.
- Universal key door locks for enhanced security.
- R290 Hydrocarbon refrigerant, to meet DOE's Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).
- Hermetic compressors with epoxy-coated evaporator.
- Automatic evaporator system without paper fins for improved efficiency.
- Electronic controller with digital display.
- LED interior lighting to enhance product display.
- Illuminated exterior sign panel.
- NSF-7 certified, meeting stringent food safety standards.
- 5" castors with front brakes for mobility and stability.



KUTGDM-1

ELECTRIC

- 115V / 60Hz / 1Ph
- NEMA 5-15P

TEMPERATURE

- 32°F to 38°F (at 100°F ambient and 65% RH).

MODEL	DOORS	SHELVES	CAPACITY	EXTERIOR DIMENSIONS (in)			SHIPPING	
			ft ³	Width	Depth	Height	Lbs	ft ³
0								
KUTG DM 1	1	4	23.0	28-1/8	31-1/8	83-1/2	289	49.4

Height includes casters.

Revision Date: February, 2026

Kutano assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.






Merchandiser Refrigerator

Single-Door Merchandiser

MODEL

□ KUTG DM 1

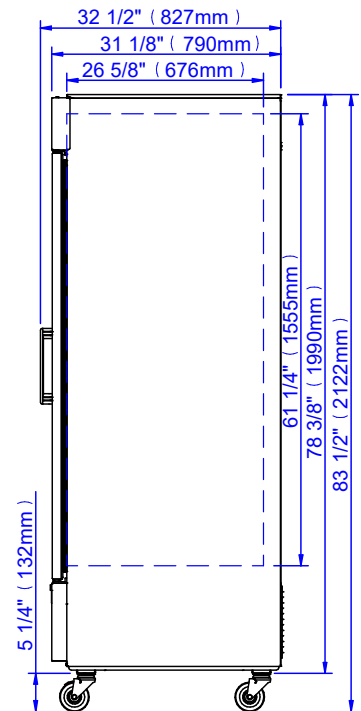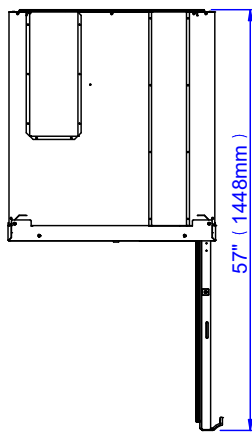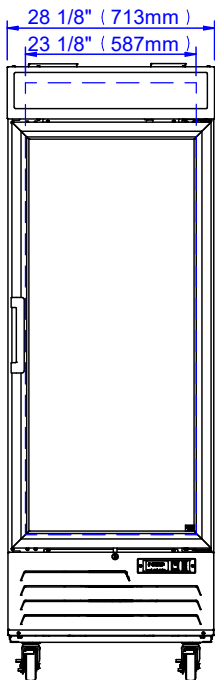

Height includes casters.

MODEL	KUTG DM 1
ELECTRICAL DATA	
Volts - Frequency	115V. - 60Hz.
Power (HP)	1/4
Full Amp Load	2.5
Plug Type	NEMA 5-15P
Refrigerant	R290
INTERIOR DIMENSIONS (in)	
Width	23-1/8
Depth	26-5/8
Height	61-1/4
Shelf (in)	23-5/8 x 22-1/2
SHIPPING DIMENSIONS (in)	
Width	33-1/2
Depth	29-1/2
Height	84-5/8

Revision Date: February, 2026

Kutano assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

