

Preassembled OSHA compliant industrial swing gates

Easy as















1.888.663.0015

YellowGate.com

YellowGate® Fall Protection

The Most Adjustable Swing Gate Available


- Universal mount for easy installation
 no additional parts to order
- OSHA compliant
- Durable built to last indoors and out
- In-stock and ready-to-ship









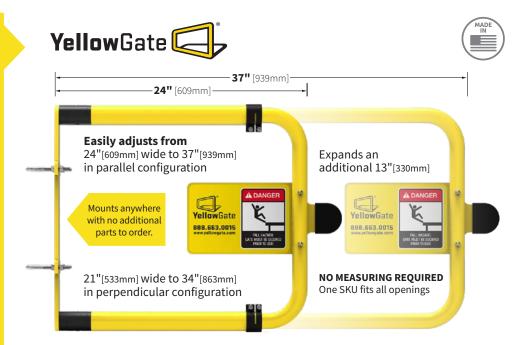



















YellowGate® can swing either in or out, with a simple in the field adjustment, for maintenance free closure, every time. Pre-Assembled & Ready to Install - straight from the box. No field cutting, drilling, or special tools required.







Powder coated

safety yellow

YellowGate ||

On-site adjustable tension spring.

Three points of adjustment for optimized balance, light touch, smooth operation and easy action movement.

52"

26"

[660 mm]

11"

[279 mm]

90° movement

Easy action

movement

[1321 mm]

The Most Adjustable Barrier Gate Available.

OSHA Compliant

Part No. **108490-XL**

Durable weather protection design

Ultra lightweight.

42" [1067 mm]

Lifts and lowers almost effortlessly.


PRODUCT KEY FEATURES:


- Adjustable from 6' [1829 mm] -12' [3658 mm],
 42" [1067 mm] height
- Powder coated safety yellow
- Aluminum extruded, laser precision manufactured
- Lightweight and easy to raise and lower
- Maintenance free ergonomic design
- Locking pin for both the open and closed positions

Available Power Option

Available with an optional 24 volt powered lift assist system, requiring a 120 volt power supply.

- Standard 50 ft. (customer to cut to desired length) cable run from controller to gate. (max. 150 ft.)
- Retro-fitable to existing manual YGXL rev3 models.
- Easy installation with basic tools
- Some electrical connection by customer required
- 15-20 second, 90 degree raise or lower

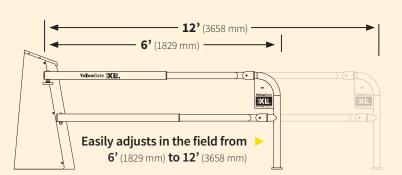

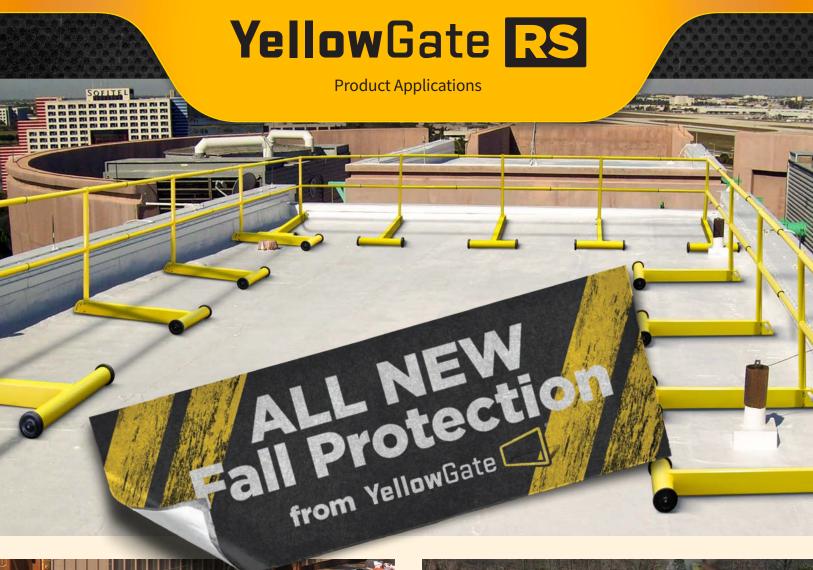






- Simple design, for re-purposing rails for constantly changing structures and situations.
- No tools required. Quick release pins are used to attach the handrails to the base
- Only 3 individual handrail components
- Meets OSHA regulations: 1910.23 (e)(1); 1910.23 (e)(3)(ii); 1910.23 (e)(3)(iv); 1910.144 (a)(3) "yellow"
- 2" (51mm) handrail diameter
- Highly Mobile with 5" (127mm) rubber wheels
- Maintenance free ergonomic design

YellowGate RS



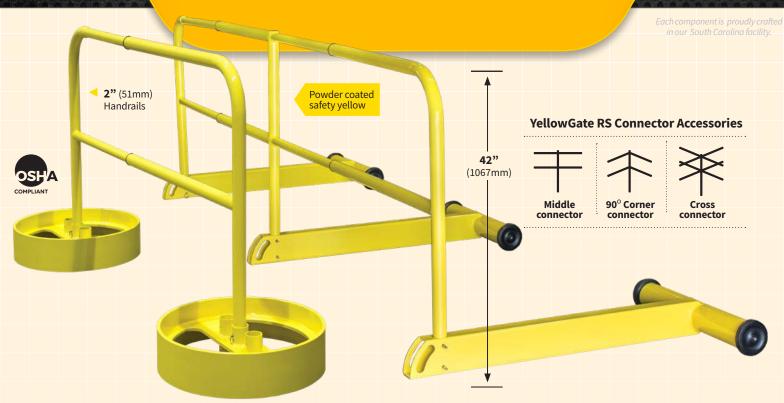





PRODUCT KEY FEATURES:

- No Tools required. Rail anchors use quick release stainless steel pins
- Field adjustable and mobile
- OSHA Compliant 42" height
- Powder coated safety yellow
- Aluminum extruded, laser precision manufactured parts
- Maintenance free ergonomic design

Order Today!

PRODUCT	SKU#
T Base	Part No. 50732
Wheel Base	
Handrail LH	
Handrail RH	Part No. 50735
Handrail Corner	Part No. 50736
Handrail Cross	Part No. 50737
Handrail Middle	Part No. 50738