



ERECTA STEP PROXL GENERATOR ACCESS STAIRS



OSHA
COMPLIANT

ADJUSTABLE
HEIGHTS

IN STOCK
AND READY
TO SHIP



The Configurations You Need. Already Engineered. OSHA Compliant. Ready to Install.

ErectaStep ProXL is a pre-engineered, bolt-together access system built for any elevated access point, such as power generator access, modular buildings, job trailers, equipment, valve access, or catwalks. It's available in popular configurations, each offered in 1–6 step heights to match the elevation your application requires. Adjustable legs enable a level footing on uneven ground and set the walk surface to the right height for the job.

Handrails and stairs reposition to suit the site, giving your team the flexibility to fit the platform to the equipment — not the other way around. The aggressive-traction, non-slip platform surface keeps footing sure in any condition, indoors or out. Pre-engineered to OSHA standards and easy to bolt together with hand tools, ProXL ships quickly and installs in days, not weeks.

Built For

Power Generator Access • Modular Buildings & Job Trailers • Valves & Maintenance Points
Catwalks & Elevated Walkways • Tanks, Skids & Process Equipment • Any Elevated Access Point

Features

- OSHA compliant
- Popular configurations
- Adjustable heights
- Repositionable stairs & handrails
- Bolts together
- Ships and installs in days






Height Reference


Each configuration is available in 1–6 step heights.
Adjustable legs add $\pm 3"$ of fine adjustment in 1" increments at every height.

Steps	Standard TOW	Adjustable Range
1 Step	18"	15" – 21" ($\pm 3"$, in 1" increments)
2 Step	27"	24" – 30" ($\pm 3"$, in 1" increments)
3 Step	36"	33" – 39" ($\pm 3"$, in 1" increments)
4 Step	45"	42" – 48" ($\pm 3"$, in 1" increments)
5 Step	54"	51" – 57" ($\pm 3"$, in 1" increments)
6 Step	63"	60" – 66" ($\pm 3"$, in 1" increments)

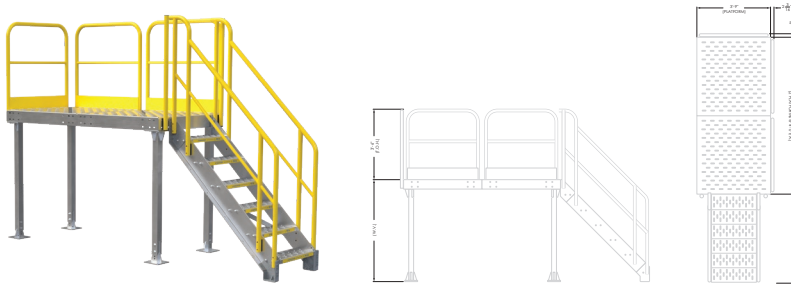

Standard ProXL | Platform: 8' x 3'9"

Most common footprint. Stair and handrail positioned to suit site requirements.

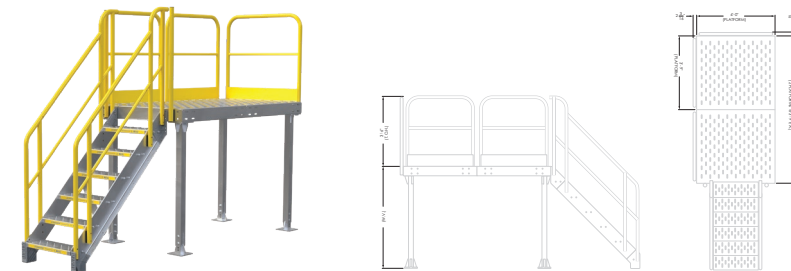

Wide ProXL | Platform: 7'6" x 4'

Wider footprint with added clearance to accommodate 36" generator doors while maintaining OSHA-required clearance. Stair and handrail positioned to suit.




L Shape ProXL | Platform: 8' x 11'3"

Wraps around equipment for multi-side access at the same elevation.

Specifications

Platforms	50 PSF load rating Aggressive-traction, non-slip surface
Stairs	1,000 lb load rating Standard ErectaStep stairs at standard angle
Handrails	200 lb load rating Powder-coated safety yellow 3'6" height with midrail and 4" toe board
Adjustable Legs	200 lb uplift anchoring $\pm 3"$ in 1" increments to dial in level footing
Material Made in the USA	Industrial-grade aluminum Lightweight Maintenance-free
Anchoring	Concrete: 5/8" wedge anchor (2.5" embedment) or 5/8" epoxy anchor (3") Steel: 5/8" tapping screws (3") <i>Channel bases to help level and secure system over open ground/gravel.</i>

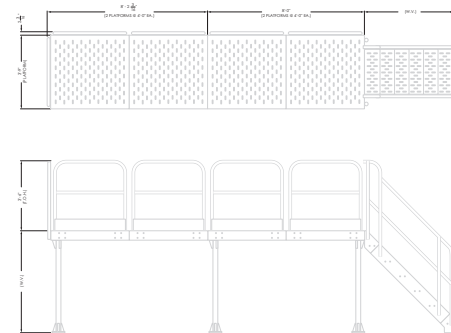


Catwalk ProXL | Platform: 16' x 4'

Extended-run access for inline equipment, valves, and maintenance points along a single elevation.

YellowGate

Add a YellowGate safety gate for added fall protection at the platform opening. Self-closing, OSHA-compliant, and engineered to integrate directly with ErectaStep ProXL.

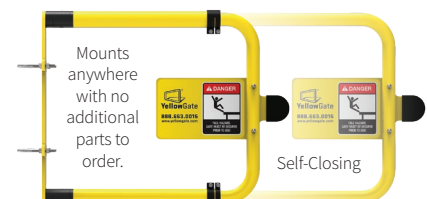

24" [609mm] wide to 37" [939mm]
in parallel configuration

21" [533mm] wide to 34" [863mm]
in perpendicular configuration