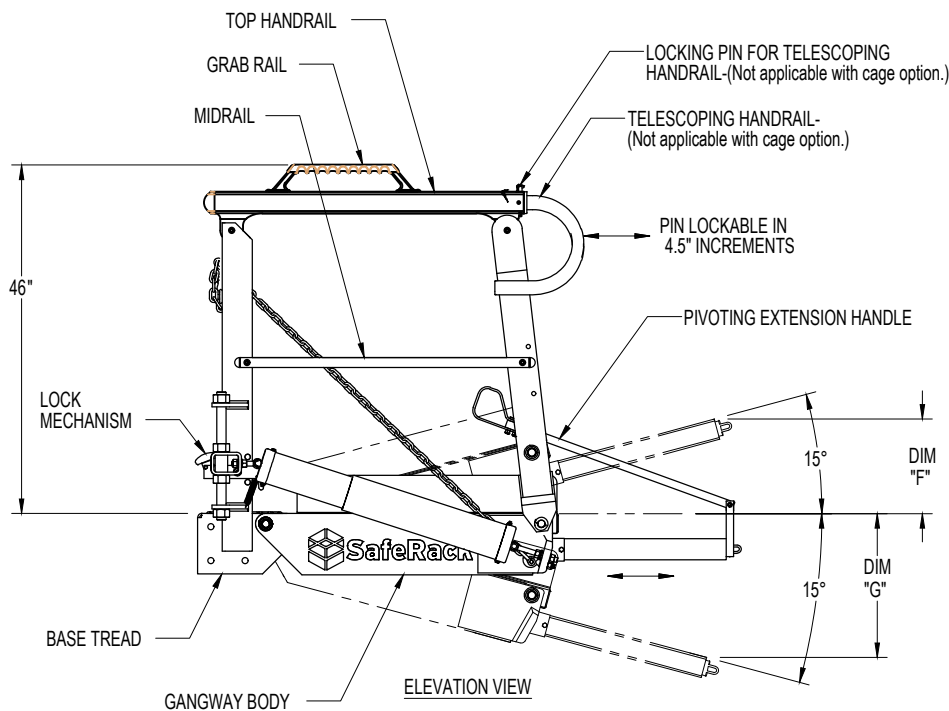
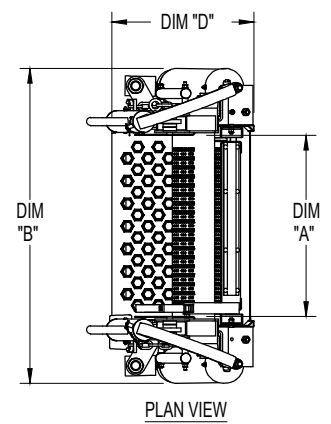
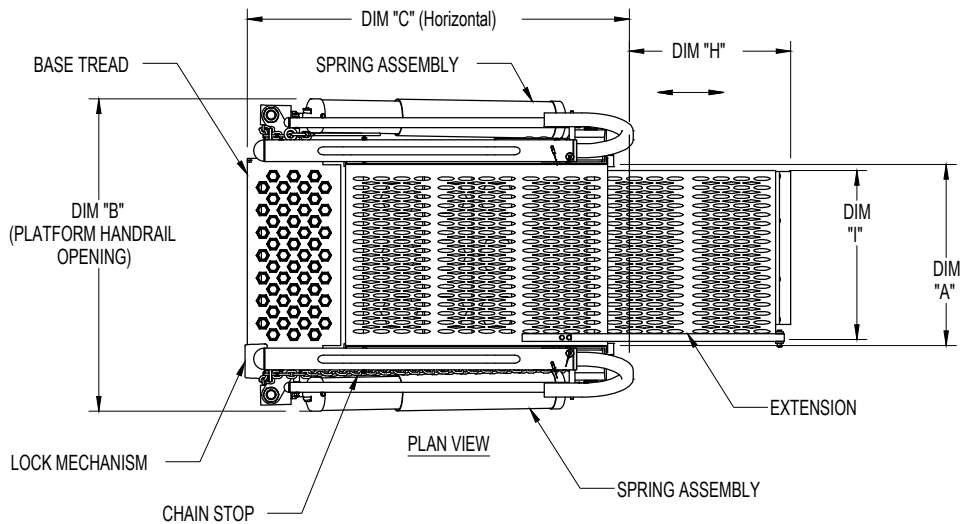


DIMENSIONS:

WALK SURFACE WIDTHS (DIM A)	24"	36"	48"	60"	72"
CORRESPONDING OVERALL WIDTHS (DIM B)	42"	54"	66"	78"	90"
CORRESPONDING EXTENSION WIDTHS (DIM I)	22"	34"	46"	58"	70"

MODEL #	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H
3 STEP	37"	18"	71"	9"	16"	11"
4 STEP	50"	19"	84"	13"	19"	21"
5 STEP	63"	20"	97"	16"	23"	21"
6 STEP	76"	22"	110"	19"	26"	21"
7 STEP	89"	23"	123"	23"	29"	21"

FRT FLAT RAMP TELESCOPING GANGWAY W/ EXTENSION- G4

SPECIFICATIONS:

- TOTAL LOAD CAPACITY- 500 lbs., HANDRAIL-200 lbs., TELESCOPING HANDRAIL-100 lbs., MIDRAIL-100 lbs.
- AVAILABLE WORKING RANGE - 15° ABOVE TO 15° BELOW HORIZONTAL.
- 2.9" DIAMETER HANDRAIL WITH 1" DIAMETER GRAB BAR.
- BASE TREAD HOT DIPPED GALVANIZED PER ASTM A 123.
- GANGWAY BODY CONSTRUCTED OF ALUMINUM (STAINLESS STEEL-OPTIONAL).
- SELF SUPPORTING BY USE OF ADJUSTABLE CHAIN STOPS.
- SPRING COUNTERBALANCED FOR EASE OF OPERATION.
- LOAD BEARING PIVOT POINTS CONTAIN OIL IMPREGNATED BRONZE BEARINGS.
- AWS WELDING SPEC. D 1.1-D1.6.
- ALL CRITICAL HARDWARE IS STAINLESS STEEL.

