HESTAN

♦ EvenFlow Air Circulating Technology™ utilizes independent ventilation for each compartment, providing even distribution of cold air flow and allowing for uniform, precise temperature control—ensuring better food preservation.

♦ EvenFlow Air Circulating Technology™ moves air through the compartment around the sides rather than back to front, creating an air curtain when the door is opened, keeping cold air from escaping and saving energy.

♦ Concealed side-mounted evaporator design allows for a deeper interior than most cabinet depth, wine refrigerators.

♦ Insulated variable speed compressor maintains precision temperature control with minimal vibration.
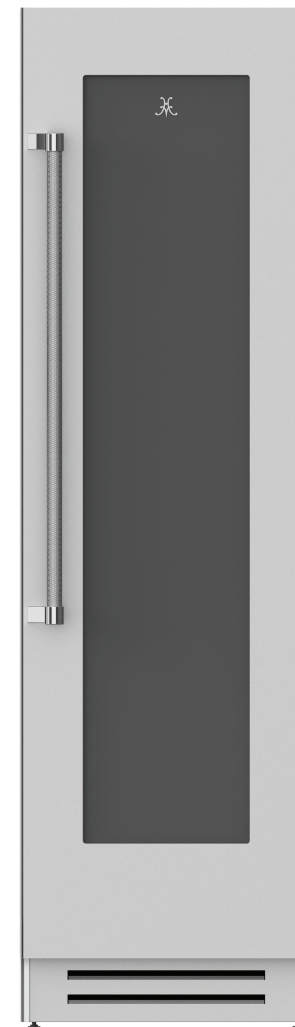
EvenFlow Air Circulating Technology™

Hinge System

Multiple temperature zones

♦ Triple-paned, bronzed glass door guarantees maximum protection from harmful UV light rays and helps maintain consistent interior preservation temperature.

♦ Dual zone temperature zones optimize storage for different types of wine with independent temperature zones ranging from 39°F to 65°F.

♦ Full-extension, oak wine racks reduce vibrations commonly harmful to wine.

♦ Heavy duty and elegant stainless steel interior liner improves preservation, reduces spore transfer and no odor retention.

♦ Multi-LED light array (each side of the interior) provides brilliant illumination to the entire interior. Offers interior display lighting option for when the door is closed to show interior and wine bottles.

♦ Robust and unique hinge system for smooth door opening. Hinge opens within itself, so side cabinetry is not compromised.

♦ Marquise Accented™ door handle with commercial grade end caps.

♦ Capacities:
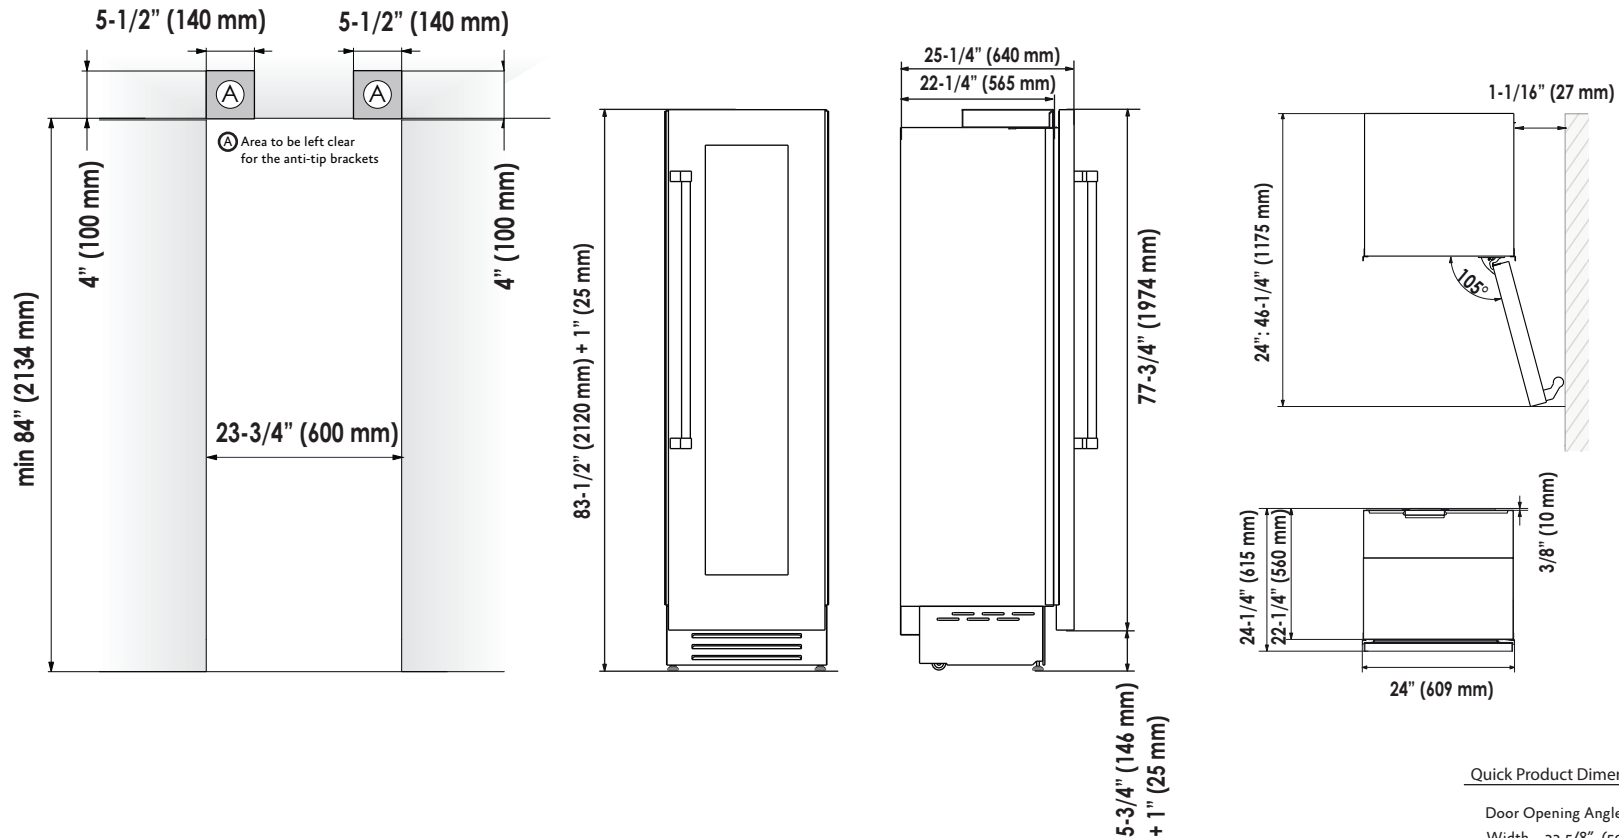   Wine Column: Dual Zone -36 bottles per zone, total of 72 bottles

Model number as shown
KWCR24

OPTIONS

♦ Available in Twelve (12) Hestan signature color finishes
♦ Wine bottle display rack with two differenct angles
♦ Overlay Available

![Hestan logo]

INSTALLATION CUT-OUT FEATURES
24" WINE COLUMN

5-1/2" (140 mm)

5-1/2" (140 mm)

A

A

Ⓐ Area to be left clear
for the anti-tip brackets

4" (100 mm)

4" (100 mm)

min 84" (2134 mm)

23-3/4" (600 mm)

83-1/2" (2120 mm) + 1" (25 mm)

5-3/4" (146 mm) + 1" (25 mm)

25-1/4" (640 mm)

22-1/4" (565 mm)

77-3/4" (1974 mm)

1-1/16" (27 mm)

24": 46-1/4" (1175 mm)

105°

24-1/4" (615 mm)

22-1/4" (560 mm)

3/8" (10 mm)

24" (609 mm)

Quick Product Dimension Reference

Door Opening Angle 105°
Width   23 5/8" (599 mm)
Height   83-1/2" (2120 mm) + 1" (25 mm)
Door Swing Clearance   46 1/4" (1175 mm)

Models	Description	Cutout Dimensions			Approx SHP WT (lbs)
		W (in.)	H (in.)	D (in.)	
KWC_24	24" Wine Column	23 3/4"	84"	25 3/4"	397
_ = Specify Left(L) or Right(R) Hinged					

Note: Hestan Commercial products are not approved or recommended for residential use. Hestan Commercial Corporation reserves the right to change materials and specifications without notice. Specify type of gas when ordering. Specify altitude when above 2,000 ft.

ELECTRICAL REQUIREMENTS :
121V, 60Hz, 15 amps

ETL
c us
LISTED
Intertek

Hestan commercial products are approved for indoor use only. Hestan Commercial Corporation reserves the right to change materials and specifications without notice.