


STANDARD FEATURES

 HESTAN

HOT TOP

- ◆ High performance stainless steel tubular burner up to 40,000 Btu/hour for powerful even heat distribution throughout
- ◆ Heavy duty 3/8" thick steel plate (12" or 18" wide)
- ◆ Available in 12", 18", 24", and 36" wide configurations
- ◆ Stainless steel drip tray for easy cleaning (except 12" model)
- ◆ Heavy gauge welded body construction
- ◆ 1-1/4" front gas manifold
- ◆ Standing pilot ignition system with front accessible pilot adjustment
- ◆ Zamak die cast knobs and bezels with set screws (*Patented*)

Stainless Steel Burner



- ◆ Stainless steel front, sides, 4.5" plate shelf, and bottom
- ◆ 9" tall Low Flue Riser

Surface Leveling Adjustment



Drip Tray




OPTIONS

- ◆ Customizable Marquise Accented™ valve panel (*Patented* / contact sales department for available options)
- ◆ Manifold caps and covers
- ◆ 1" rear gas supply connection
- ◆ Front manifold union connections
- ◆ Stainless steel back cover
- ◆ Common plate shelf up to 108" wide
- ◆ Extended plate shelf (6" or 8")
- ◆ Belly bar with 1" space or extended to accommodate 1/9 condiment pans
- ◆ 4" legs for countertop models
- ◆ Risers: Tall, Mid, or Island Trim
- ◆ Shelves: single or double, solid, tubular or mixed

Model number as shown HHT363



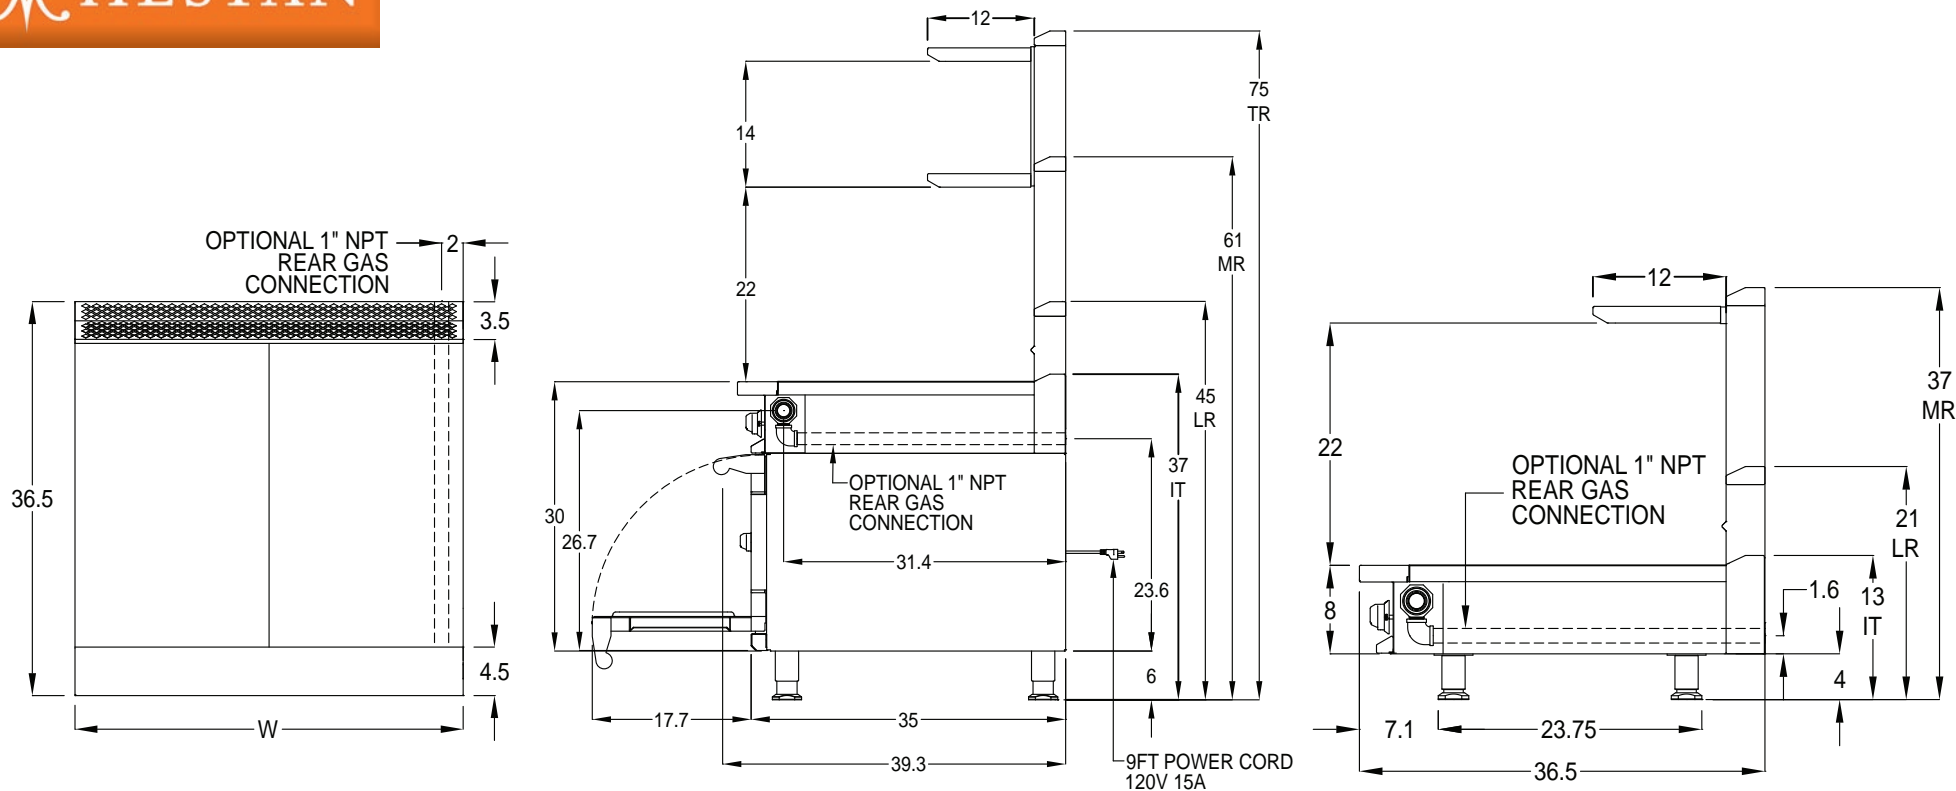

| Model | Description | Gas [Btu/HR] | Approx SHP WT | Width (W) |
|--------|-----------------|--------------|---------------|-----------|
| HHT12 | 12" Hot top | 30,000 | 150 | 12" |
| HHT18 | 18" Hot top | 40,000 | 250 | 18" |
| HHT242 | 24" 2 -Hot tops | 60,000 | 300 | 24" |
| HHT362 | 36" 2 -Hot tops | 80,000 | 420 | 36" |
| HHT363 | 36" 3 -Hot tops | 90,000 | 470 | 36" |

Note: Hestan Commercial products are not approved or recommended for residential use. Hestan Commercial Corporation reserves the right to change materials and specifications without notice. Specify type of gas when ordering. Specify altitude when above 2,000 ft.

ELECTRICAL : No electrical requirement

GAS : 1-1/4" front manifold, capped or connectable to adjacent equipment. 1" male NPT rear gas connection available. Minimum gas supply is 7" water column for natural gas and 11" for propane. Operating pressure at the manifold is 5" water column for natural gas and 10" for propane. All units require a regulated gas supply.

VENTILATION : The product is required to be installed under an exhaust hood.



CONTACT US: www.hestancommercial.com

phone 888.905.7463

3375 E. La Palma Ave., Anaheim, CA 92806