

STANDARD FEATURES



STANDARD OVEN


- ◆ Heavy duty modular standard oven base. 36" wide to accommodate modular rangetops of various sizes to form freestanding ranges, stacked ovens, custom lineups, or cooking suites.
- ◆ High performance stainless steel tubular U-burner rated at up to 40,000 Btu/hour
- ◆ Direct vent flue with standard heat exchanger system for maximum heat transfer from gas burner to oven cavity (*Patented*)
- ◆ 28" W x 27" D x 14.5" H heavy duty stainless steel oven cavity interior with flame spreader for even heat distribution throughout
- ◆ Removable stainless steel drip tray for ease of cleaning

Counter Balanced Soft Opening Door



- ◆ Counter-weight oven door hinge system with hydraulic soft opening capabilities (*Patented*)
- ◆ 5-position rack supports that are designed to allow placement of full size sheet pans without the use of an oven rack
- ◆ 2 heavy duty nickel plated oven racks included
- ◆ High efficiency insulated, water-proof door and oven cavity
- ◆ Electronic thermostatically controlled oven from 150°F to 650°F (HSO only)
- ◆ Intermittent Pilot System with solenoid safety valve and flame sense (HSO only)

Intermittent Pilot



- ◆ Standing pilot with dual knob combination thermostatic safety valve from 150°F to 550°F (HSOP only)
- ◆ Full-width Marquise Accented™ stainless steel oven door handle and Zamak die cast end caps (*Patented*)
- ◆ Heavy gauge welded body construction
- ◆ Zamak die cast knobs and bezels with set screws (*Patented*)
- ◆ Stainless steel front, sides, and bottom
- ◆ 3/4" rear manifold with connection options
- ◆ 6" height adjustable legs (4)

Heat Exchanger






OPTIONS

- ◆ Colors (contact sales department for available colors)
- ◆ Customizable Marquise Accented™ control panel (*Patented* / contact sales department for available options)
- ◆ Stainless steel backcover
- ◆ Additional oven rack
- ◆ 6" height adjustable casters (4). Two (2) with brakes
- ◆ Curb base



Model number as shown HSO36



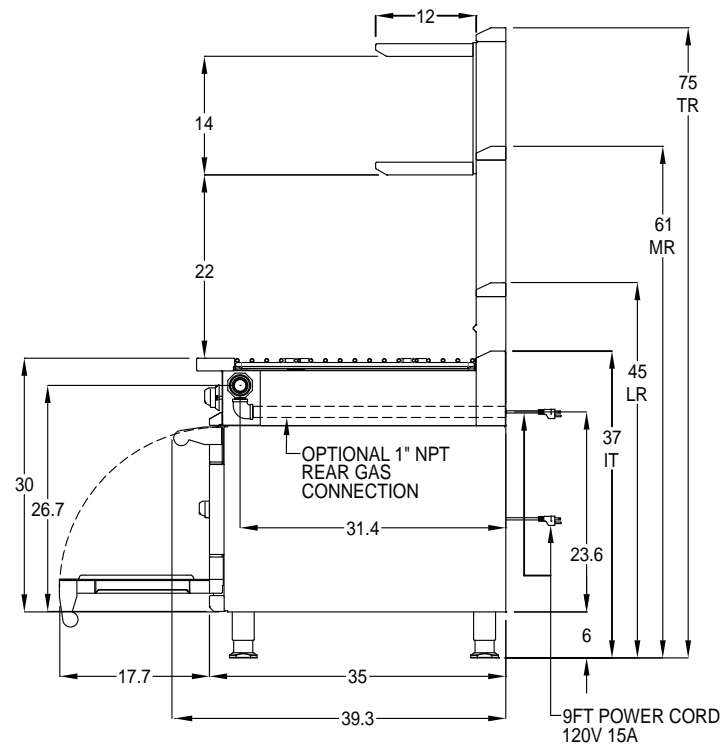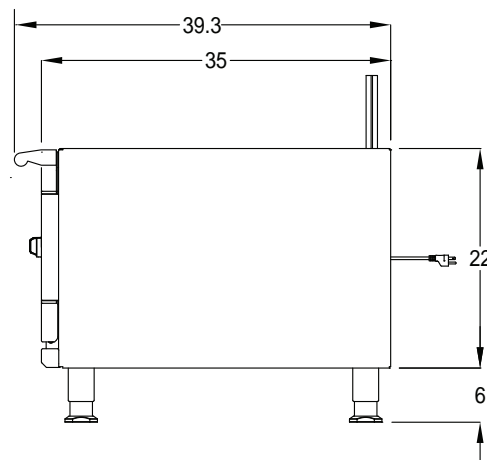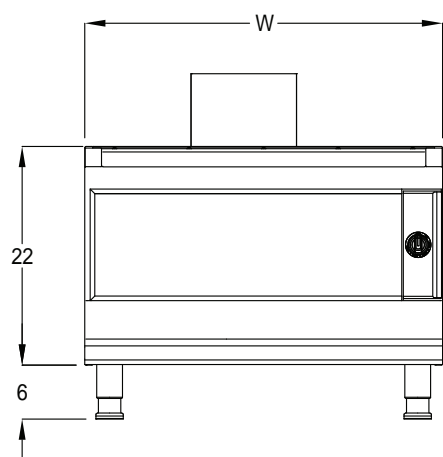

Model	Description	Gas [Btu/HR]	Approx SHP WT	MAX AMP Draw	Width (W)
HSO 36	36" wide Standard Oven Base	40,000	465	1	36"
HSOP 36	36" wide Standard Oven Base w/ standing pilot	40,000	465	N/A	36"

Note: Hestan Commercial products are not approved or recommended for residential use. Hestan Commercial Corporation reserves the right to change materials and specifications without notice. Specify type of gas when ordering. Specify altitude when above 2,000 ft.

ELECTRICAL : 120V, 60Hz, 15A, 1 phase. (HSO only)

GAS : 3/4" male NPT rear gas connection available. Minimum gas supply is 7" water column for natural gas and 11" for propane. Operating pressure at the manifold is 5" water column for natural gas and 10" for propane. All units require a regulated gas supply.

VENTILATION : The product is required to be installed under an exhaust hood.

